



PC94 Non-Silicone Thermal Conductive Pad

Version 3.160819



Non-Silicone Thermal Conductive Pad

PC94 is a soft, non-silicone thermal interface pad designed to replace traditional thermal pads in silicone-sensitive applications. Typical uses include, set-top boxes, optical and automotive projects. PC94 can be provided in a range of different thicknesses and formats depending on the end use.

Features

- Low contact thermal impedance
- Good thermal conductivity
- Silicone free
- Long term stability

Applications


Electronic components: IC, CPU, MOS
 LED, M/B, P/S, Heat Sink
 LCD TV, Notebook PC, PC Telecom Device, Wireless Hub, etc.
 DDR II Module, DVD Applications, Hand-set applications, etc.

Properties

- ✓ REACH Compliant
- ✓ ROHS Compliant

Property	PC94	Unit	Tolerance	Test Method
Colour	Red	-	-	Visual
Thickness (Available thickness range)	0.50 - 5.0	mm	-	ASTM D374
	0.0098 - 0.1969	inch	-	ASTM D374
Thermal Conductivity	4.2	W/mK	± 10%	ASTM D5470
Flammability Rating	V-0	-	-	UL 94
Dielectric Breakdown Voltage	10.2	kV/mm	-	ASTM D149
Weight Loss	<1	%	-	ASTM E595
Density	2.5	g/cm ³	± 0.2	ASTM D792
Working Temperature	-30 to +125	°C	-	-
Volume Resistance	>10 ¹⁰	Ohm-cm	-	ASTM D257
Elongation	100	%	-	ASTM D412
Tensile Strength	2	Kgf/cm ²	-	ASTM D412
Hardness	50	Shore 00	± 10	ASTM D2240

Thermal Impedance vs Pressure vs Deflection

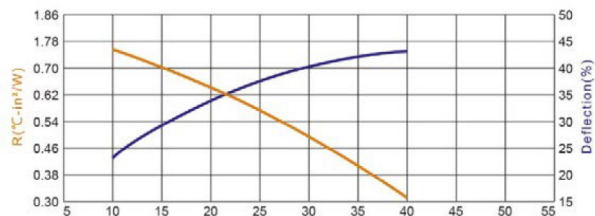

Pressure (psi)	R(°C-in ² /W)	Deflection (%)
10	0.75	23
20	0.64	34
40	0.31	43

T-Global Technology Limited
 1 & 2 Cosford Business Park, Central Park,
 Lutterworth, Leicestershire LE17 4QU U.K.

Tel: +44 (0)1455 553 510
 Email: sales@tglobaltechnology.com
 Web: www.tglobaltechnology.com
 VAT #: GB 116 662 714



PC94 Non-Silicone Thermal Conductive Pad

Standard Weights & Dimensional Tolerance

Size	Thickness (mm)	0.50	0.80	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00
	100x100	12.50	20.00	25.00	37.50	50.00	62.50	75.00	87.50	100.00	112.50	125.00
150x150	28.13	45.00	56.25	84.38	112.50	140.63	168.75	196.88	225.00	253.13	281.25	
300x300	112.50	180.00	225.00	337.50	450.00	562.50	675.00	787.50	900.00	1,012.50	1,125.00	
320x320	128.00	204.80	256.00	384.00	512.00	640.00	768.00	896.00	1,024.00	1,152.00	1,280.00	

* All measurements in mm

Die-Cut Thickness Tolerances	Thickness (mm)	Tolerance (mm)
	0.3	±0.03
	0.5	±0.05
	0.8	±0.08
	1.0	±0.1
	1.2	±0.12
	1.5	±0.15
	2.0	±0.2
	2.5 - 3.5	±0.25
	4.0 - 4.5	±0.3
	5.0	±0.35
	6.0 - 8.0	±0.4
	9.0	±0.45
10.0	±0.5	
>10.0	±0.5	

* Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.

NOTICE: The information contained herein is to the best of our knowledge true and accurate. However, since the varied conditions of potential use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part and users should make their own test to determine the suitability of our products in any specific situation. This product is sold without warranty either expressed or implied, of fitness for a particular purpose or otherwise, except that this product shall be of standard quality, and except to the extent otherwise stated in T-Global Technology Europe and North America's invoice, quotation, or order acknowledgment. We disclaim any and all liabilities incurred in connection with the use of information contained herein, or otherwise. All risks of such are assumed by the user. Furthermore, nothing contained herein shall be construed as a recommendation to use any process or to manufacture or to use any product in conflict with existing or future patents covering any product or material or its use.