
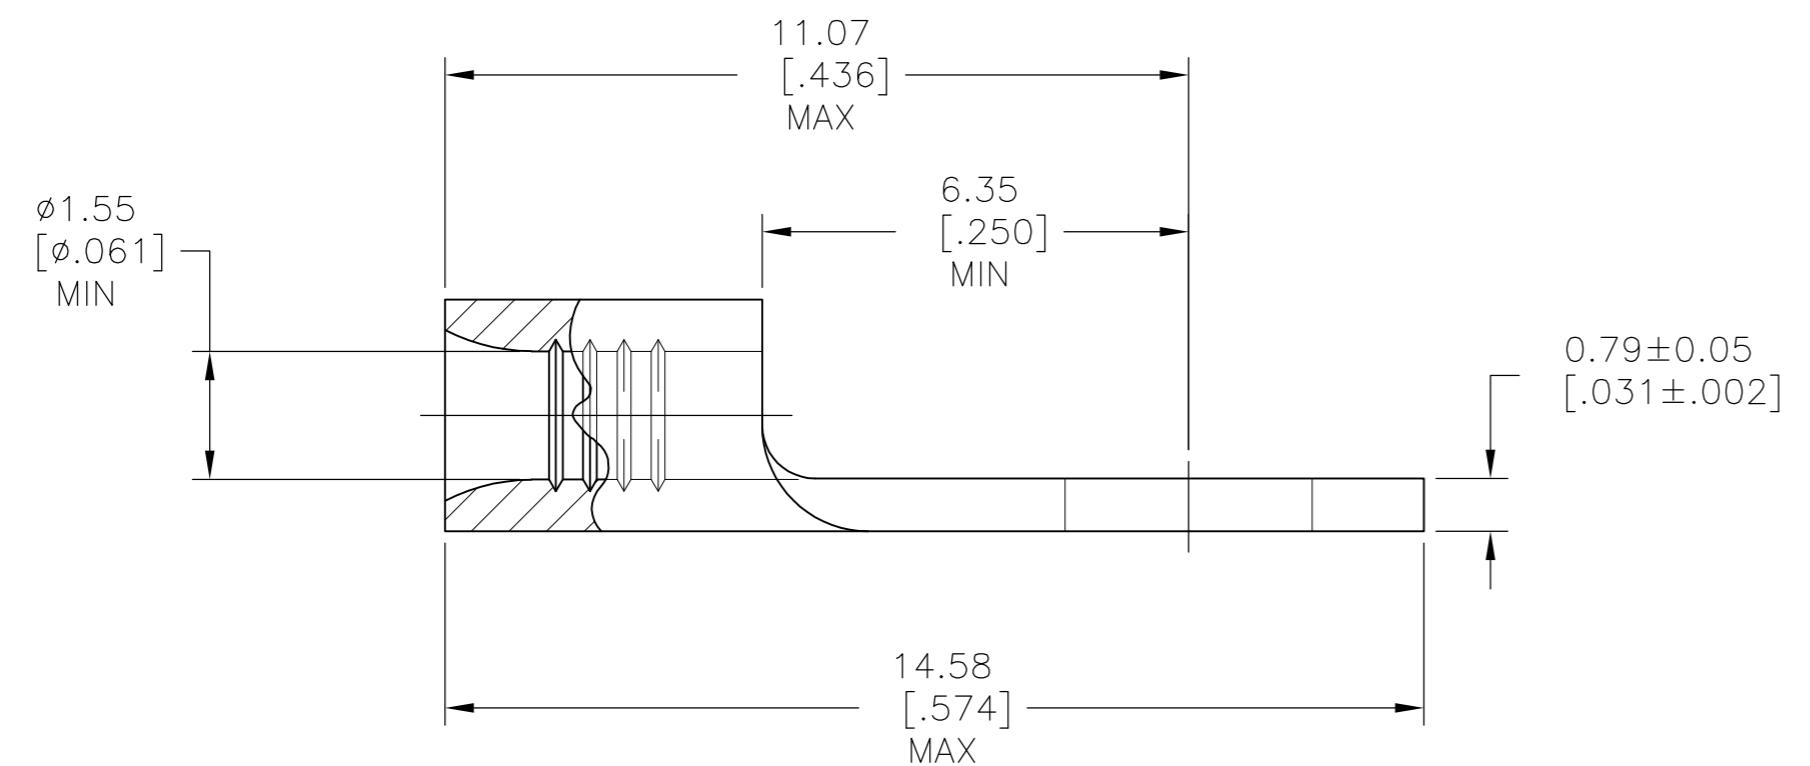


THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

© COPYRIGHT - By -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	REVISED PER ECO-16-004986	20JUN2016	NK	DR

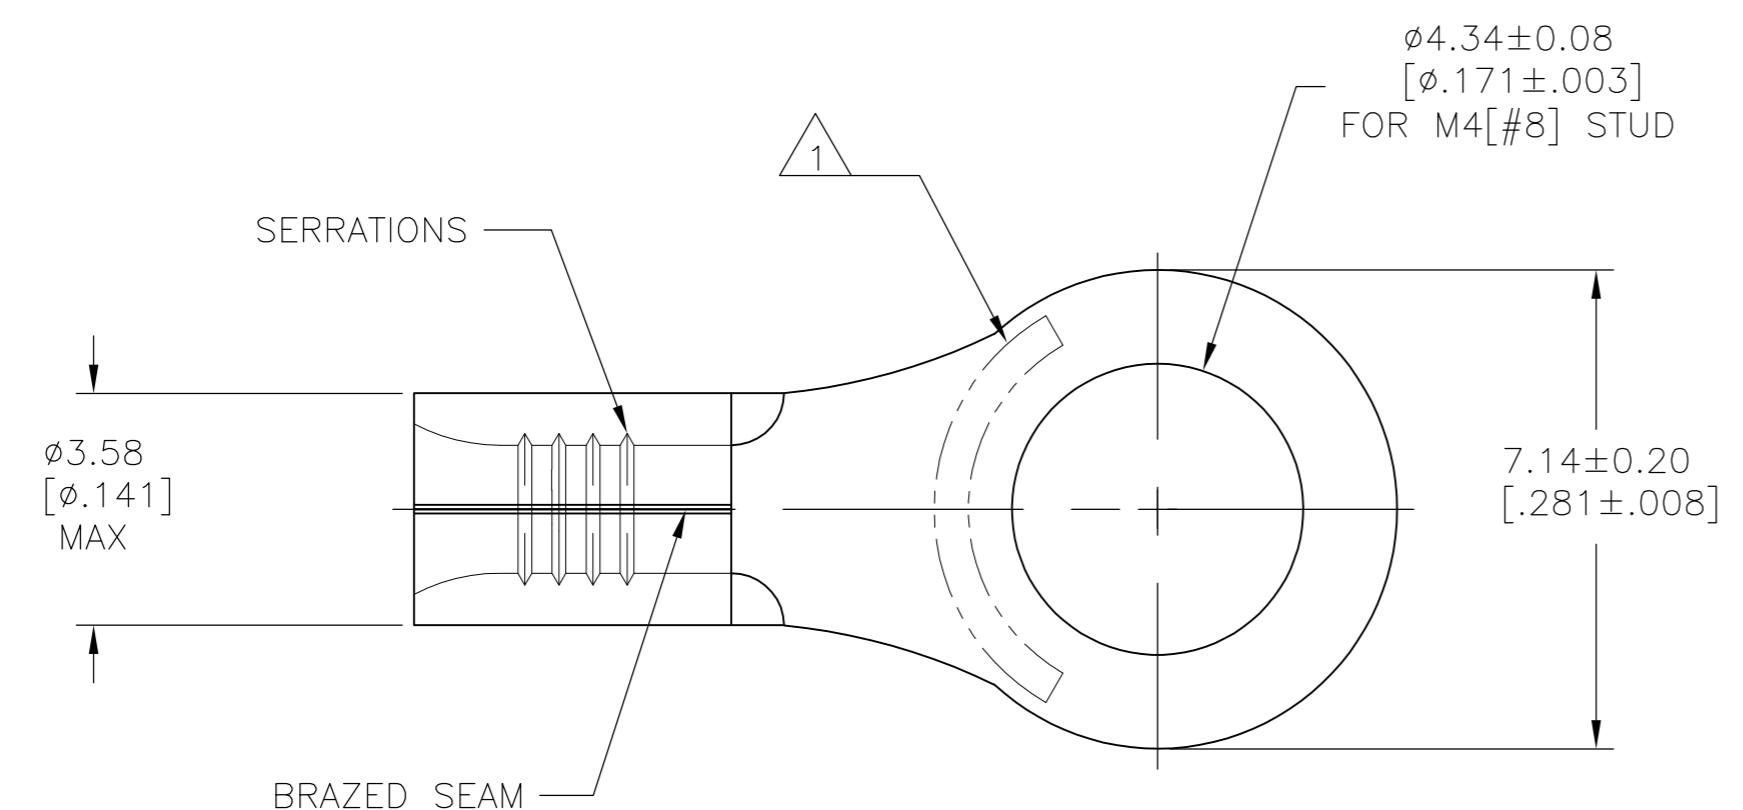

AMP WIRE RANGE	E13288 Listed
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
22-16 AWG SOLID OR STRANDED	NOT APPLICABLE

1 STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPEC SAER AS7928
COMMERCIAL WIRE RANGE IS 22-16.

2 TIN PL 0.00254 [0.000100] MIN THK
PER ASTM B545.

3 GOLD PL 0.00127 [0.000050] MIN THK
PER MIL-G-45204 OVER NICKEL PL
0.00076 [0.000030] MIN THK PER SAE AMS QQ-N-290.

4 TIN LEAD PLATE 0.01016-0.02032
[0.000400-0.00080] THK PER MIL-P-81728.

5 PRE-PRODUCTION - FASR REQ.

4	1000	LOOSE PIECE	34108-2
6 7	100	LOOSE PIECE, BOX	8-34108-1
6 7	5000	ON TAPE	2-34108-2
6 7	1000	LOOSE PIECE	1-34108-1
6 7	1000	LOOSE PIECE	34108
FINISH	QUANTITY	PACKAGING TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN TA BRINKMAN 3-10-93
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	± - ± - ± - ± - ± -
	APPLICATION SPEC
MATERIAL COPPER PER ASTM B-152 ANNEALED	FINISH SEE TABLE WEIGHT — CUSTOMER DRAWING
SIZE A2	CAGE CODE 00779
	DRAWING NO C-34108
	RESTRICTED TO —
SCALE 10:1	1 OF 1
REV D2	1

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

MAX RECOMMENDED OPERATING
TEMPERATURE:

170°C [338°F] MAX

VOLTAGE RATING:

NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:

0.26-1.65mm² [509-3,260] CIR MILS
SOLID OR STRANDED

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[34108-2](#) [1-34108-1](#)