
OA180AP Series



AC Fan - 115V, 230V 176 x 89mm (6.9" x 3.5")



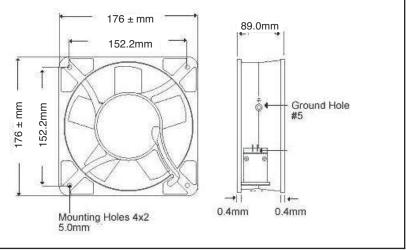


Frame	Diecast Aluminum
Impeller	PBT, UL94V-O plastic
Connection	2x Lead Wires 20 AWG or terminals
Motor	Capacitor drive, thermally protected
Bearing System	Dual ball
Insulation Resistance	>100M ohm between lead- wire and frame (500VDC)
Dielectric Strength	1 min at 1,500 VAC, 50/60Hz

Operating Temperature
Ball Bearing
-20C ~ +80C
Storage Temp
-40C ~ +80C

Life Expectancy
Ball Bearing
60,000 hours (L10, 40C)

Weight: 4.0 lbs.



Part Number	OA180AP-11-1 *	OA180AP-22-1 *
Nominal AC Voltage	115	230
Voltage Range	60 ~ 130 VAC	120 ~ 260 VAC
Rated Power (50/60 Hz)	70 W	70 W
RPM (50/60 Hz)	3350	3350
Airflow - CFM (50/60 Hz)	375	375
Noise Level - dB (50/60 Hz)	62	62
Max. Static Pressure	0.86" H ₂ O	00.86" H ₂ O

m0

^{*} Indicate "TB" for terminal or "WB" for wire leads