

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0357254310

Status:


Active

Overview:

Standard Quick-Disconnect Terminals

Description:

Quick Disconnect, Female, for 20-22 AWG (0.52-0.33mm²), Metal Strip, Tab 6.35 x 0.81mm, Slip-On Type with Slot, Post Tin Plating

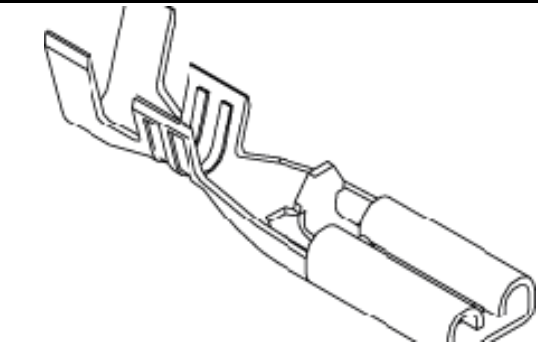

Series image - Reference only

Documents:

[Drawing \(PDF\)](#)

[Product Specification PS-35703-001-001 \(PDF\)](#)

[Packaging Specification PK-35725-007-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family

Series

Crimp Quality Equipment

Insulated

Overview

Product Name

Type

UPC

Quick Disconnects

35725

Yes

No

Standard Quick-Disconnect Terminals

N/A

Quick Disconnect

800753514676

Physical

Barrel Type

Gender

Glow-Wire Compliant

Insulation

Lock to Mating Part

Material - Metal

Net Weight

Orientation

Packaging Type

Polarized to Mating Part

Tab Thickness

Tab Width

Temperature Range - Operating

Wire Insulation Diameter

Wire Size AWG

Open

Female

No

None

Yes

Brass

0.786/g

Straight

Reel

No

0.81mm

6.35mm

-25°C to +85°C

1.50-2.00mm max.

20, 22

Electrical

Voltage - Maximum

Per Wire Specification

Material Info

Reference - Drawing Numbers

Packaging Specification

Product Specification

Sales Drawing

PK-35725-007-001

PS-35703-001-001

SD-35725-43*0

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/30/2017 (7 July

2017)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

35725 Series

Use With

6.35mm Tab

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[35725-4310](#)