

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0765003807](#)
Status: **Active**
Overview: [Impact Backplane Connector and Cable Assembly System](#)
Description: Impact 100 Ohm 4 Pair RAM Right-Angle Header, Left Guided, Open Endwall, 8 Columns, 96 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead-Free

Documents:
[3D Model](#) [Application Specification AS-76060-994-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [Application Specification AS-76060-9999-001 \(PDF\)](#)
[Product Specification PS-76060-999-001 \(PDF\)](#) [Packaging Specification PK-70873-041-001 \(PDF\)](#)
[Application Specification AS-76060-990-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


UL E29179

General

Product Family Backplane Connectors
Series [76500](#)
Application Coplanar
Application Tooling Documents TM-622018799
Component Type PCB Header
Overview [Impact Backplane Connector and Cable Assembly System](#)
Product Name Impact
UPC 883906873653

Physical

Circuits (Loaded) 96
Circuits (maximum) 96
Color - Resin Black
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part Yes
Keying to Mating Part None
Material - Metal High Performance Alloy (HPA)
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 15.478/g
Number of Columns 8
Number of Pairs 4
Number of Rows 12
Orientation Right Angle
PC Tail Length 1.20mm
PCB Locator No
PCB Retention Yes
PCB Thickness - Recommended 1.00mm
Packaging Type Tray
Pitch - Mating Interface 1.90mm
Pitch - Termination Interface 1.90mm
Plating min - Mating 0.762µm
Polarized to PCB Yes
Stackable No
Temperature Range - Operating -55° to +85°C
Termination Interface: Style Through Hole - Compliant Pin

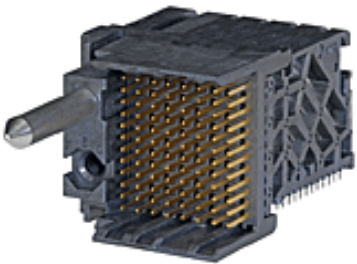

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/71/2019 (16 July
2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[76500](#) Series

Mates With

[76160](#) Impact 100 Ohm Daughtercard

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Press-In Tool for Daughter Card Module	622018677
Impact Right-Angle Module Removal Tool (RAM)	622024350

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100Ω
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990-001, AS-76060-994-001, AS-76060-9999-001
Electrical Model Document	EE-76500-002
Packaging Specification	PK-70873-041-001
Product Specification	PS-76060-999-001
S-Parameter Model	SP-76500-002
Sales Drawing	SD-76500-002
Symbol/Footprint Data	SYM-76500-3807

This document was generated on 10/22/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

76500-3807