

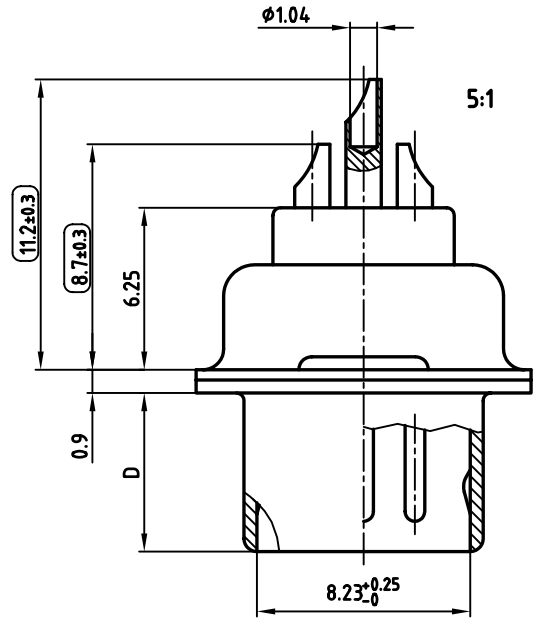
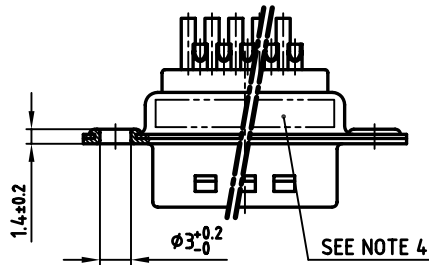


POS.	A -0.76	B $+0.25$	C	D -0.3	Part No.
15	31.19	16.79	25.00 $+0.12$ -0.13	6.12	301A10129X
26	39.52	25.12	33.30 $+0.15$ -0.1	6.12	301A10139X
44	53.42	38.84	47.04 ± 0.13	5.99	301A10149X
62	69.70	55.30	63.50 ± 0.13	5.99	301A10159X

used for: D-SUB HD

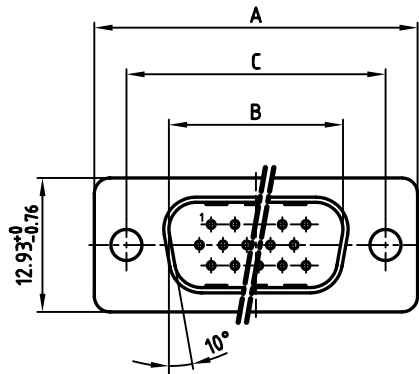

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
SOLDER CUP ACCEPTS CABLE AWG 22
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
- = CHECK DIMENSION

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	dim. in mm
2005	date
drawn	21.11. Lehmenkühler
appd.	21.11. Mickenbecker
norm	DIN 41652
d-old	
CONEC	

scale:	2:1 (5:1)
material:	SEE NOTES
title:	D-SUB HD MALE 15-62pos. SOLDER CUP STAMPED CONTACTS
dwg no:	AutoCAD 2004
part no:	SEE TABLE
DIN-A	3
sh:	1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[301A10129X](#)