


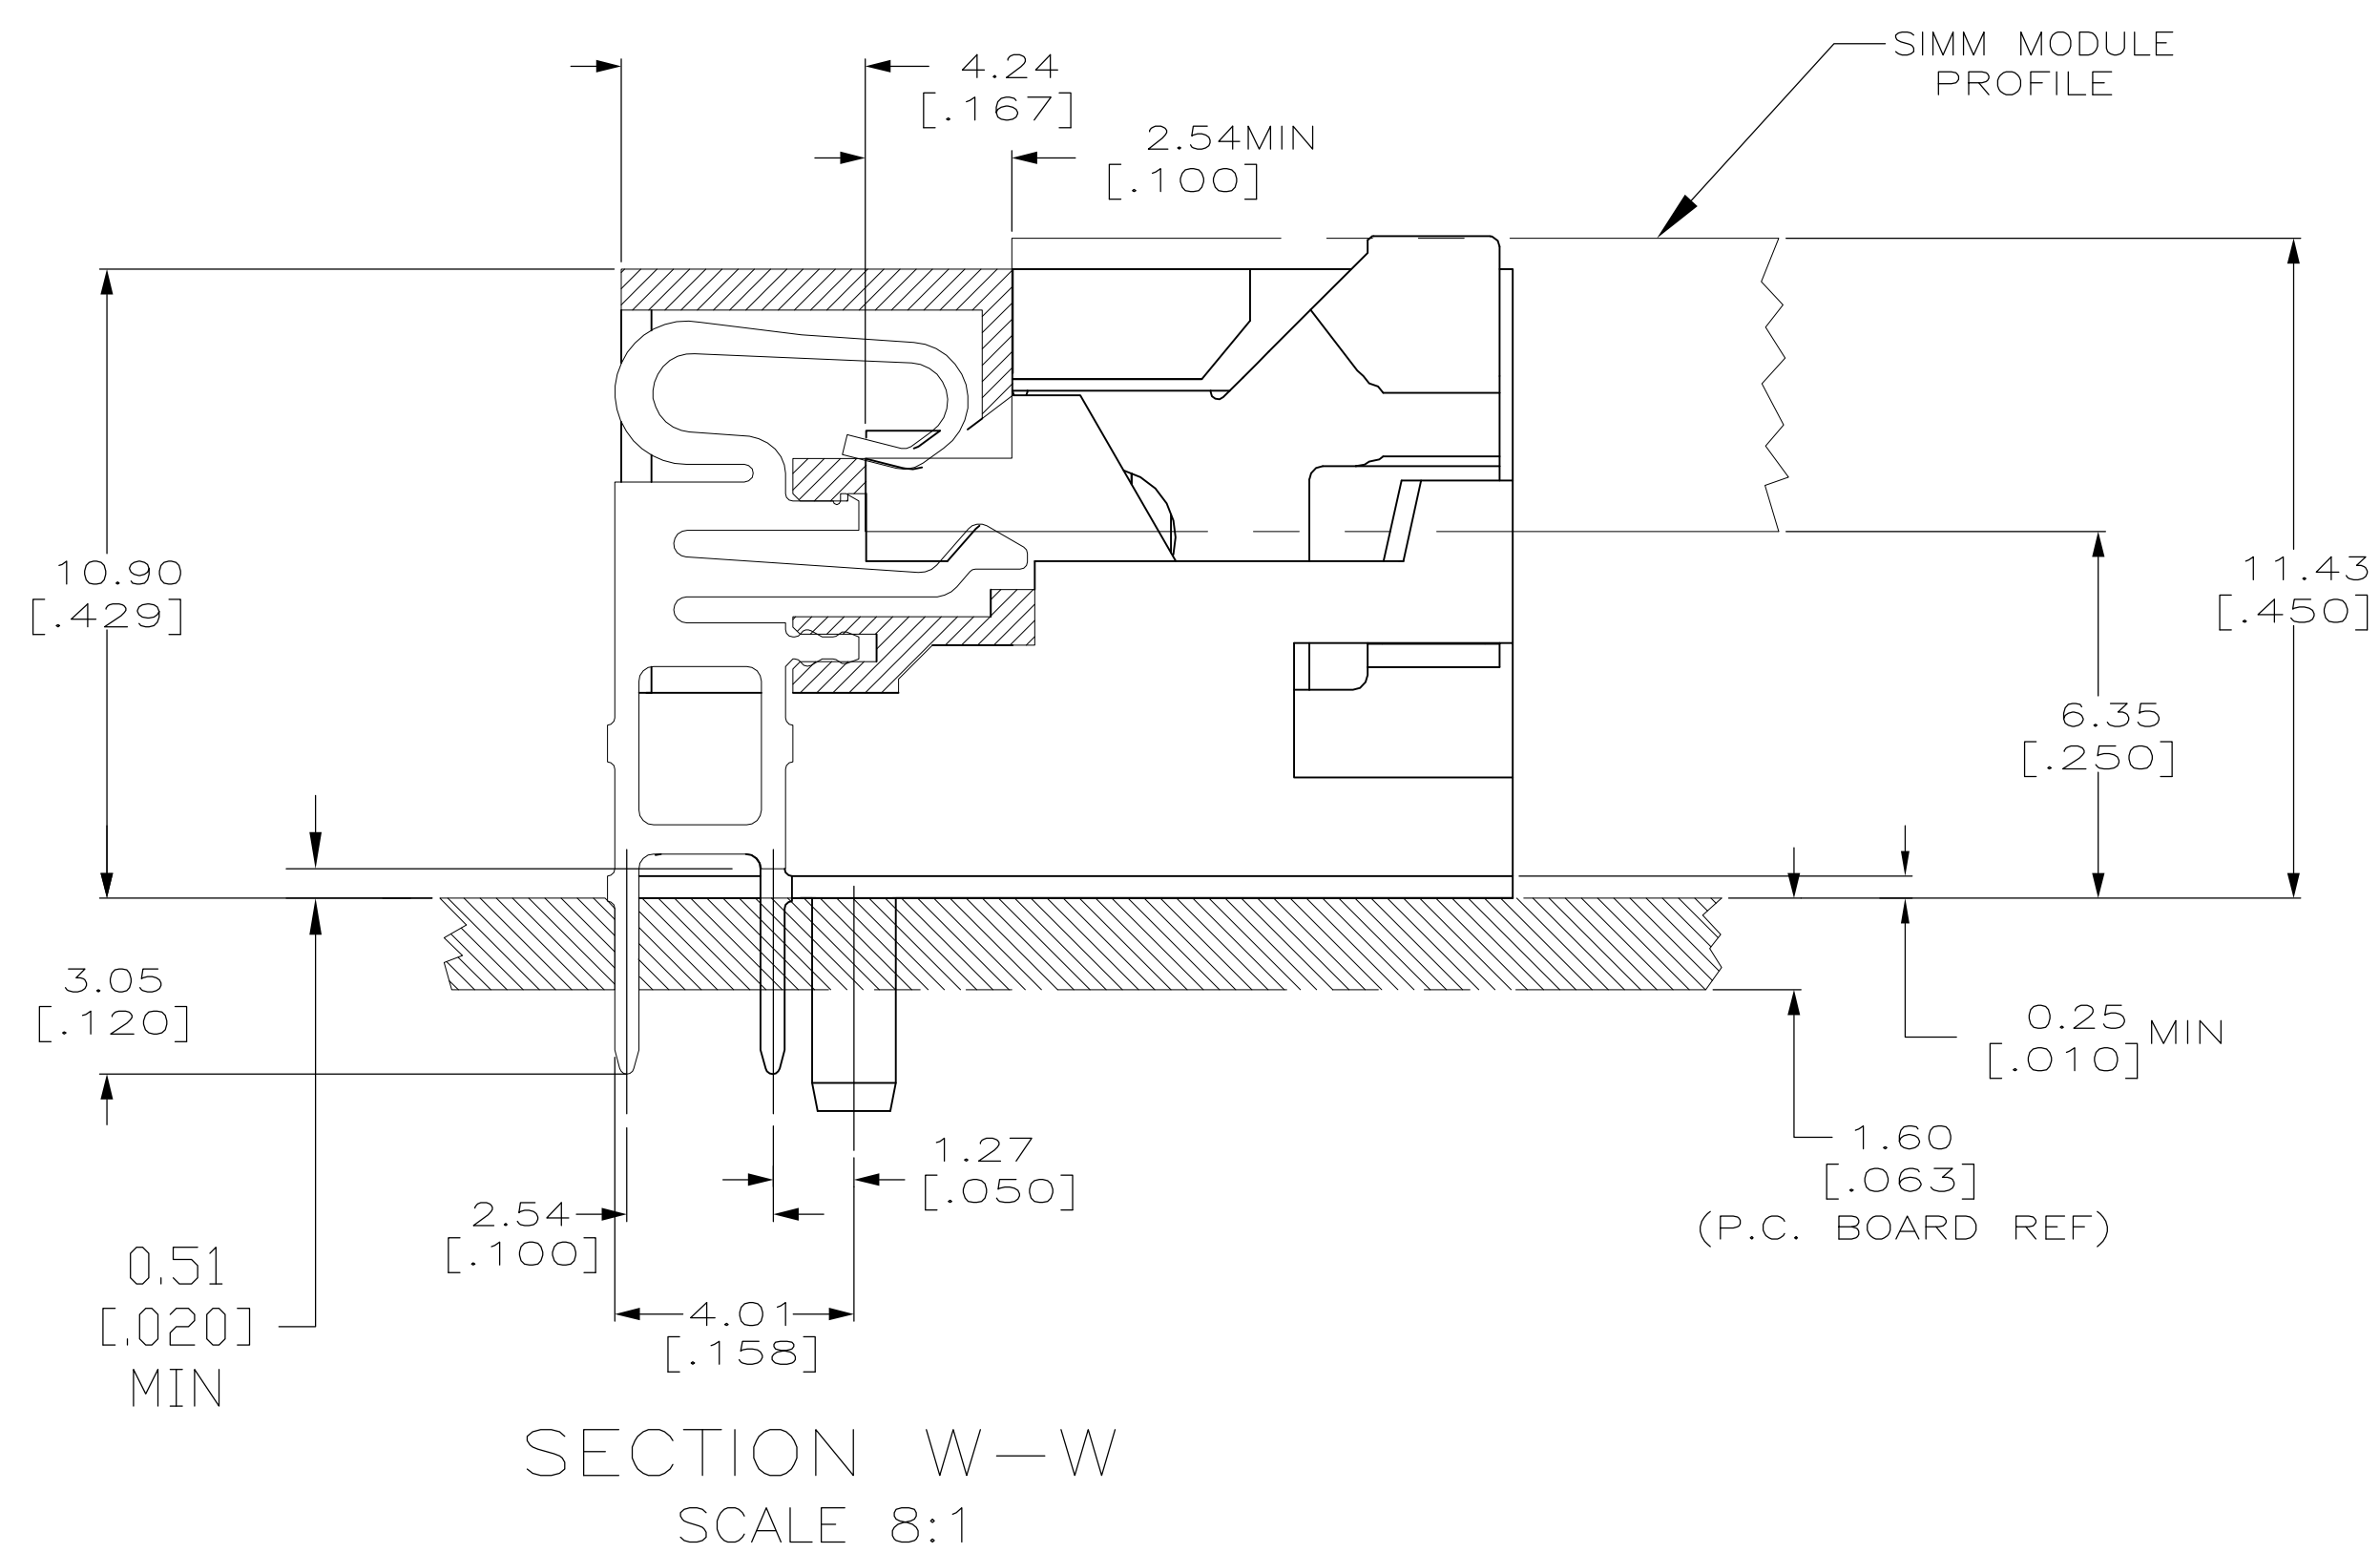


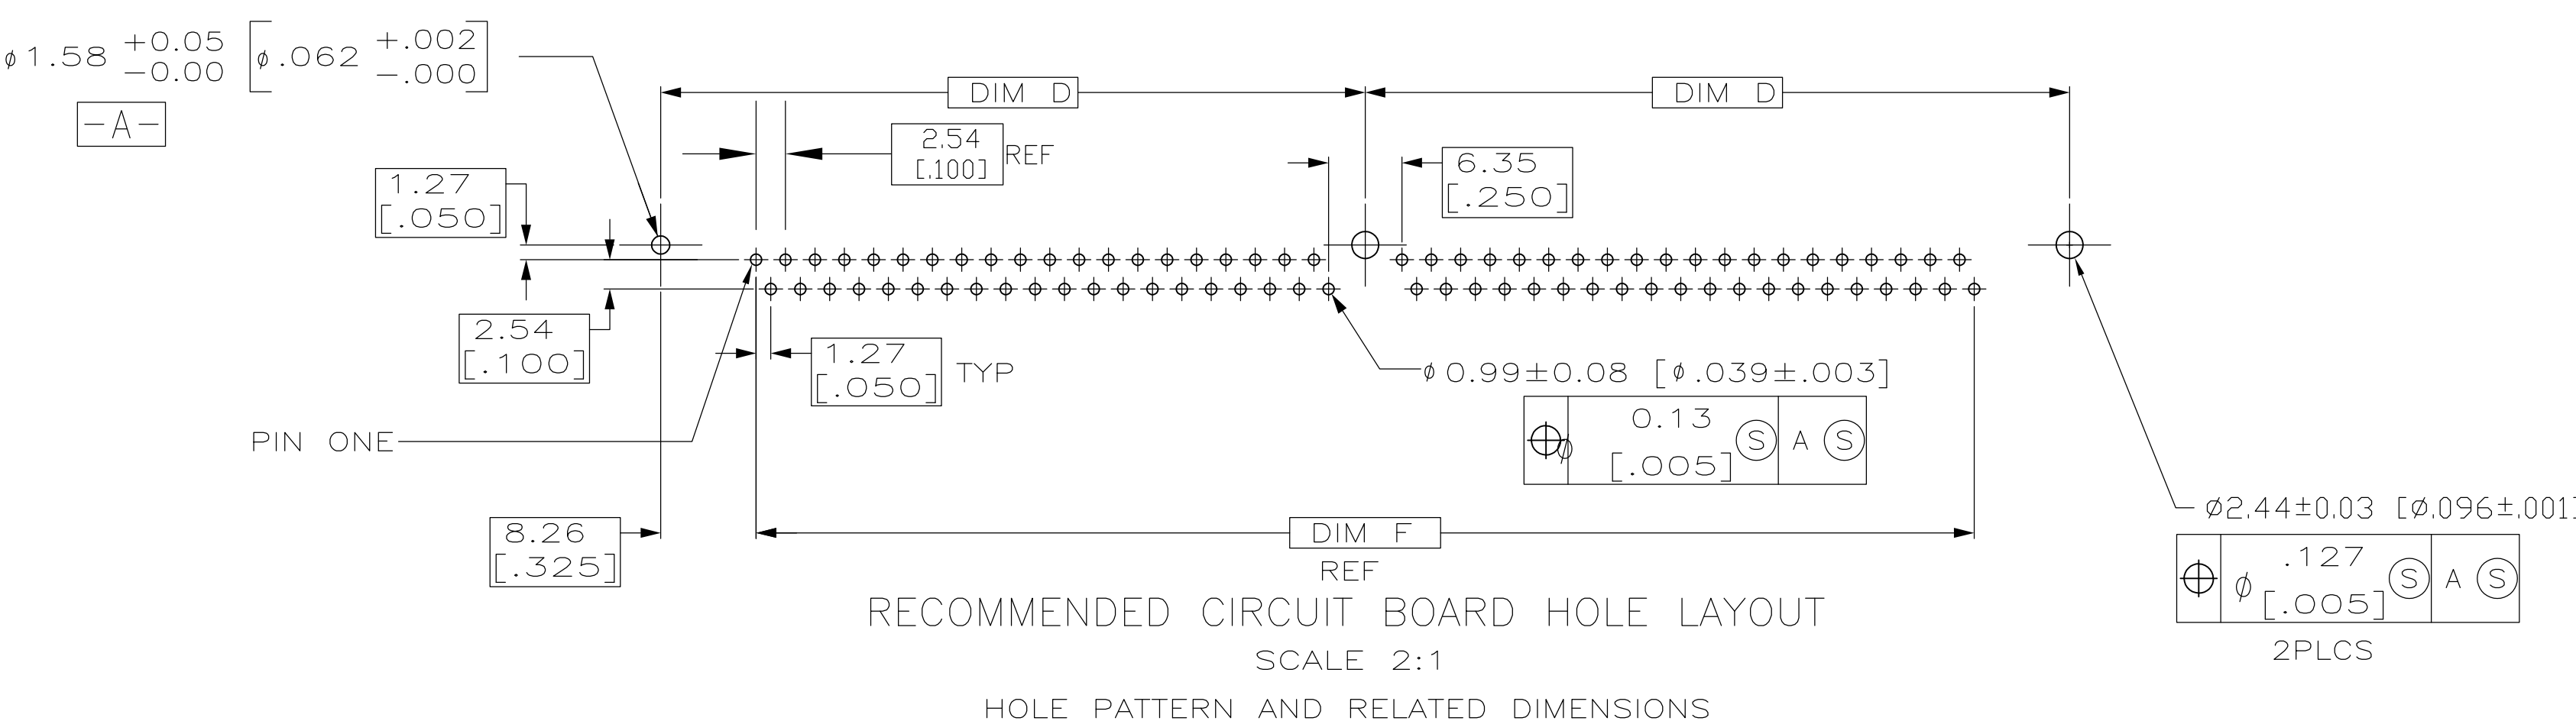

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. BILLMAN 4-9-90 GRW R. MILLER 4-9-90		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLG ± - 1 PLG ± - 2 PLG ± - 3 PLG ± .127[.005] 4 PLG ± ± - ANGLES FINISH		NAME SIMM II RTANG 1.27[.050] 1.27 [.500] CL ASSY., 6.350 [.250] HEIGHT	
		APPLIC. PRODUCT SPEC — APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A1 00779 C=382486	
MATERIAL HSG:GLASS REINF		WEIGHT —		RESTRICTED TO SCALE 4:1 SHEET 1 OF 2 REV J	
		CUSTOMER DRAWING			

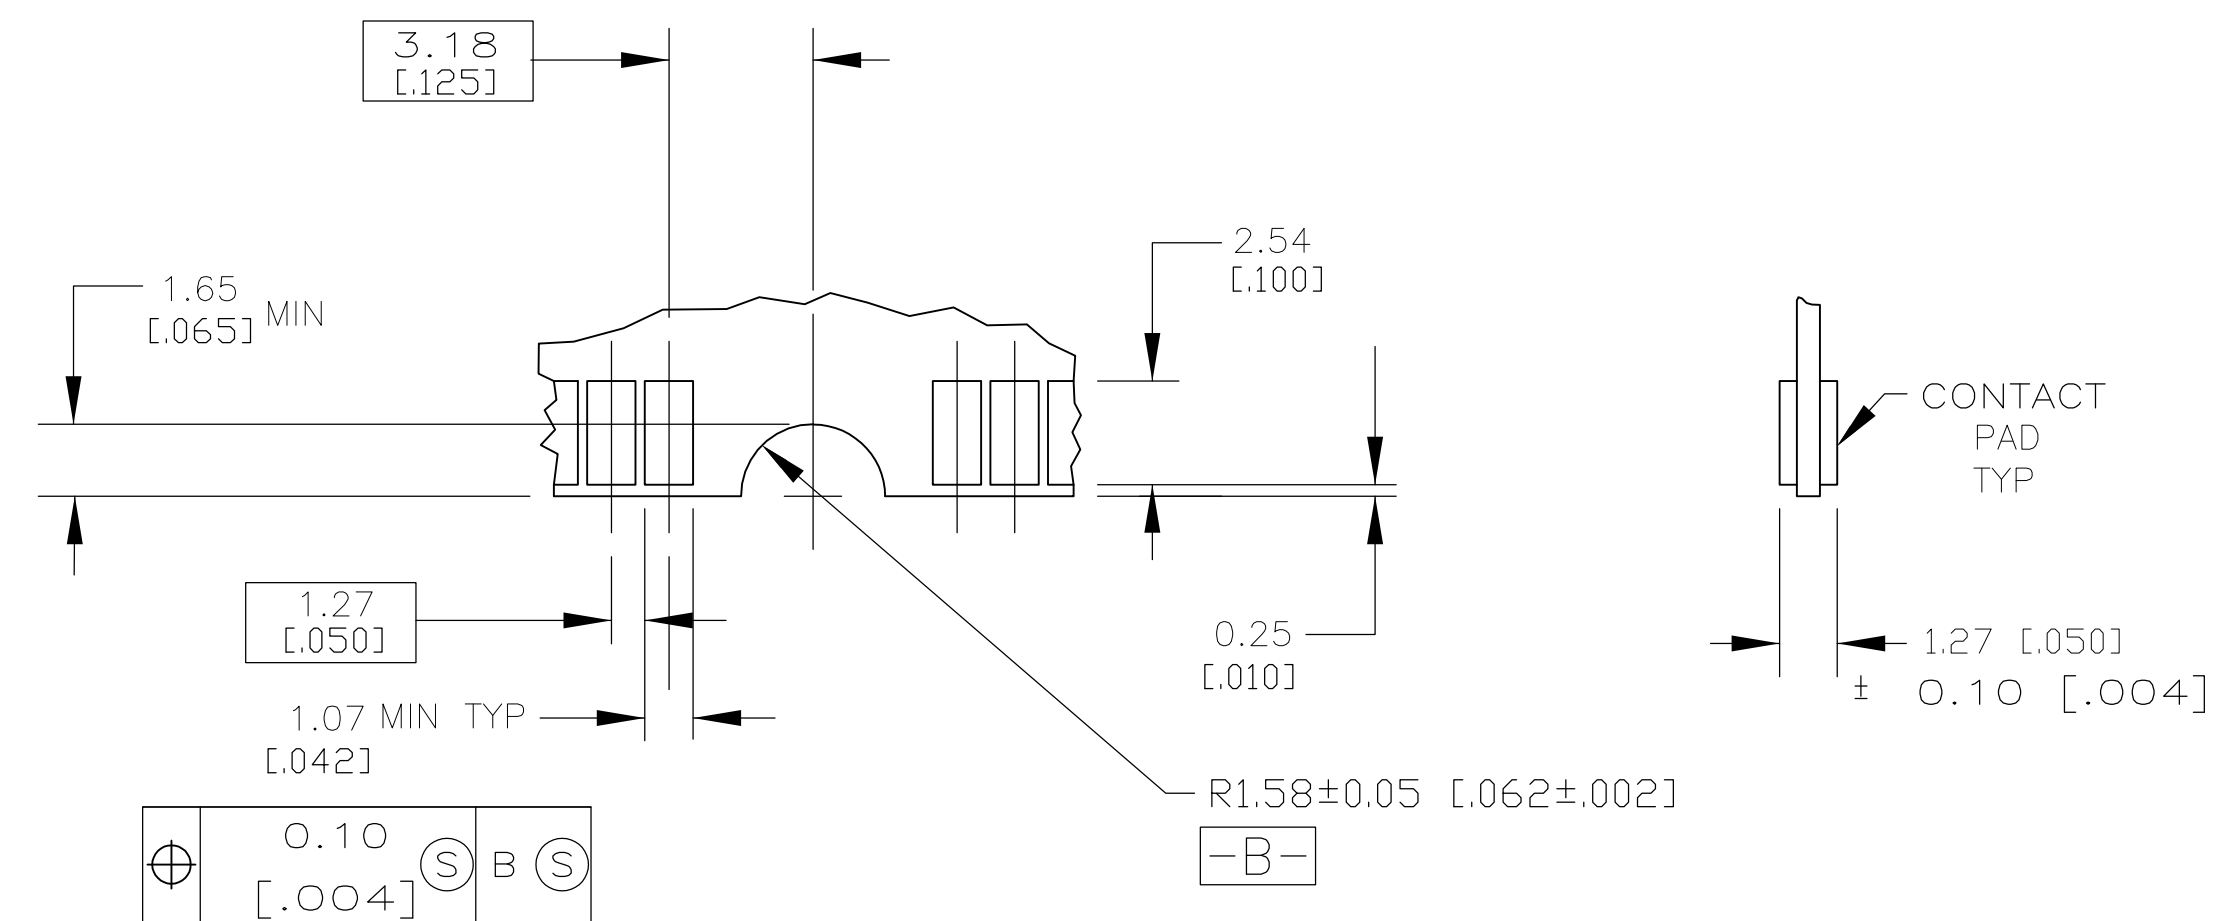

- 1
- FOR OPTIMUM PERFORMANCE, CONTACT PAD PLATING SHOULD BE SMOOTH AND FLAT. COPPER CONTACT PADS ARE TO BE OVERPLATED WITH .00127[.000050] MIN THK NICKEL FOLLOWED WITH 0.00254[.000100] MIN THK TIN-LEAD PLATING.
- 2
- 0.00381 [.000150] MIN. THK TIN-LEAD OVER 0.00127 [.000050] MIN. THK NICKEL OVER ENTIRE CONTACT.

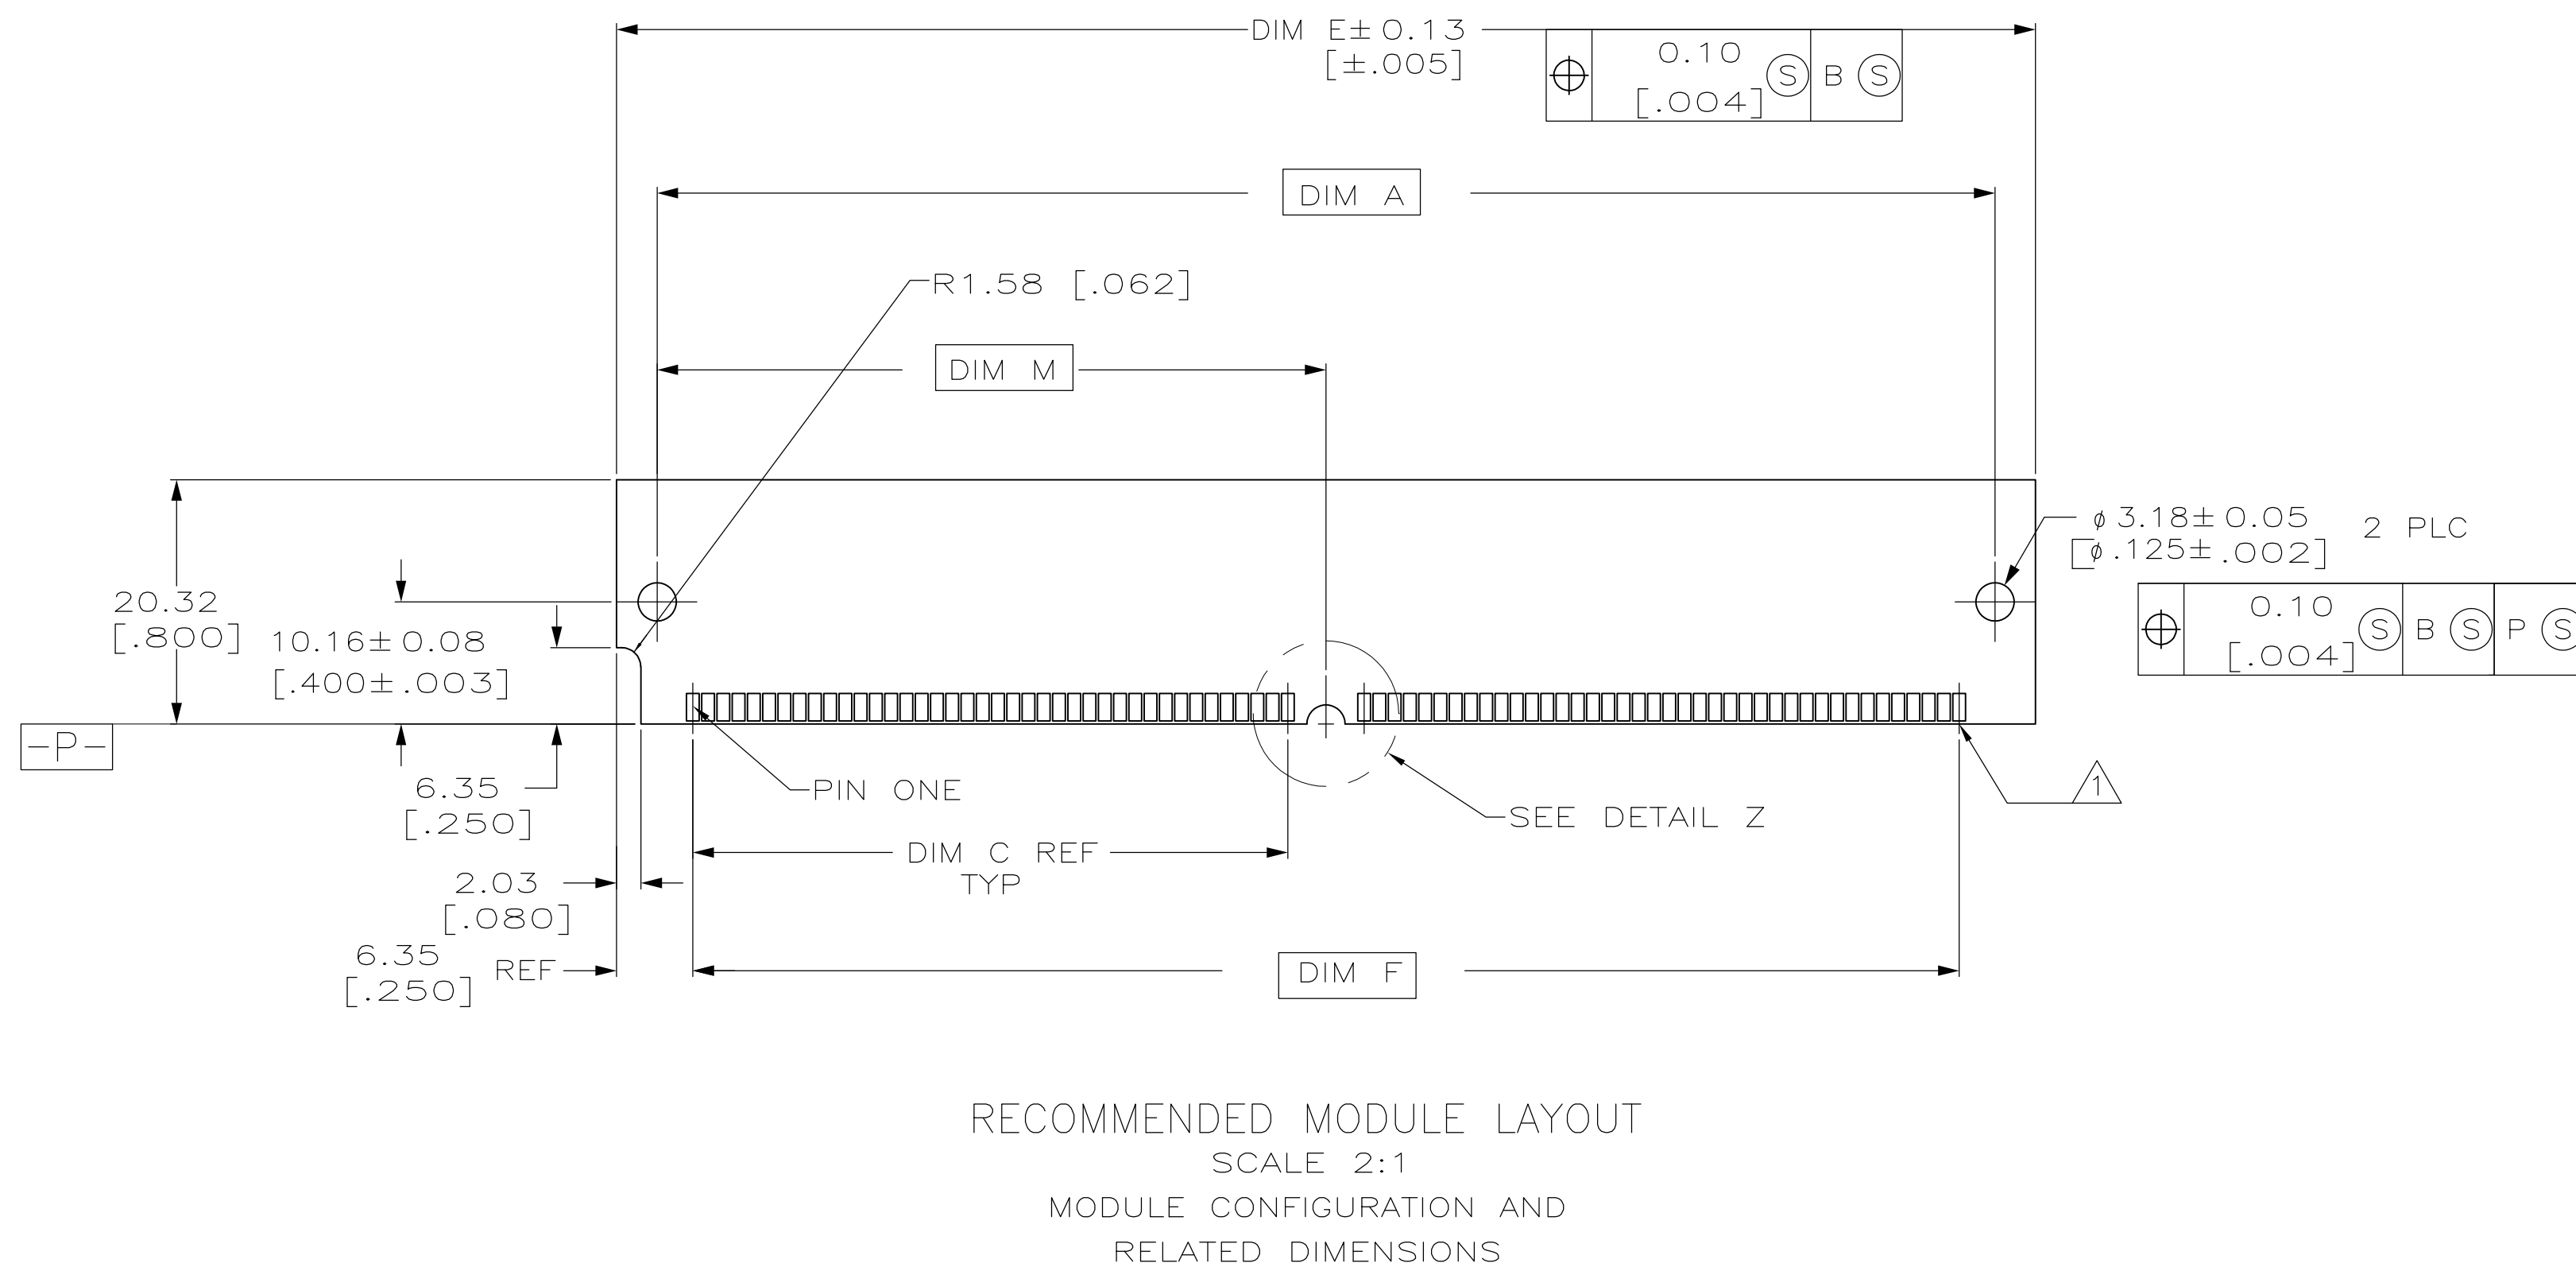

OBSOLETE	58.22	[2.292]	127.00	[5.000]	110.49	[4.350]	123.19	[4.850]	63.50	[2.500]	52.07	[2.050]	130.81	[5.150]	116.43	[4.584]	84	8-382486-4
	55.68	[2.192]	121.92	[4.800]	105.41	[4.150]	118.11	[4.650]	60.96	[2.400]	49.53	[1.950]	125.73	[4.950]	111.35	[4.384]	80	8-382486-0
	50.60	[1.992]	111.76	[4.400]	95.25	[3.750]	107.95	[4.250]	55.88	[2.200]	44.45	[1.750]	115.57	[4.550]	101.19	[3.984]	72	7-382486-2
OBSOLETE	48.06	[1.892]	106.68	[4.200]	90.17	[3.550]	102.87	[4.050]	53.34	[2.100]	41.91	[1.650]	110.49	[4.350]	96.11	[3.784]	68	6-382486-8
OBSOLETE	45.52	[1.792]	101.60	[4.000]	85.09	[3.350]	97.79	[3.850]	50.80	[2.000]	39.37	[1.550]	105.41	[4.150]	91.03	[3.584]	64	6-382486-4
OBSOLETE	30.28	[1.192]	71.12	[2.800]	54.61	[2.150]	67.31	[2.650]	35.56	[1.400]	24.13	[.950]	74.93	[2.950]	60.55	[2.384]	40	4-382486-0
	DIM M		DIM J		DIM F		DIM E		DIM D		DIM C		DIM B		DIM A		POSN	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-382486-0](#)