DATE	REVISIONS			
4-22-98	E.C.N. #10BRDR. & #10383. & #10387. & REDRAWN./	Α		

DRAWING NUMBER LDQ-N514RI Α

### ELECTRO-OPTICAL CHARACTERISTICS $T_A = 25^{\circ}C$ $I_f = 10 \text{ mA}$

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH FORWARD VOLTAGE REVERSE VOLTAGE AXIAL INTENSITY EMITTED COLOR: FONT COLOR: SEGMENT COLOR:	5.0 RED GREY MILKY	635 (RED) 2.0 3900 WHITE DIFFUSE	2.5 D	nm Vf Vr µcd	I <sub>r</sub> =100μΑ I <sub>f</sub> =10mA

#### LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT* STEADY CURRENT POWER DISSIPATION DERATE FROM 25°C OPERATING, STORAGE TEMP. SOLDERING TEMP. 2.0mm FROM BODY	150 30 105 -1.2 -40 TO +85 +260	mA mA mW mW/*C *C *C *C 3 SEC. MAX

\* t<10µS

## RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

# INCORPORATED

290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 (847) 359-2790


Α

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INCORPORATED.
EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INCORPORATED, THE HOLDER OF
THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT
SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMIMATION TO ALL THIRD PARTIES.

DWN: CHK'D: APPD: DATE: 5-24-95 SCALE: N/A

> 0.56" QUAD DIGIT, SEVEN SEGMENT DISPLAY, 635nm RED, GREY FONT/WHITE SEGMENTS, MULTIPLEXED, COMMON CATHODE.

DRAWING NUMBER REV PAGE 1 OF 1 LDQ-N514RI

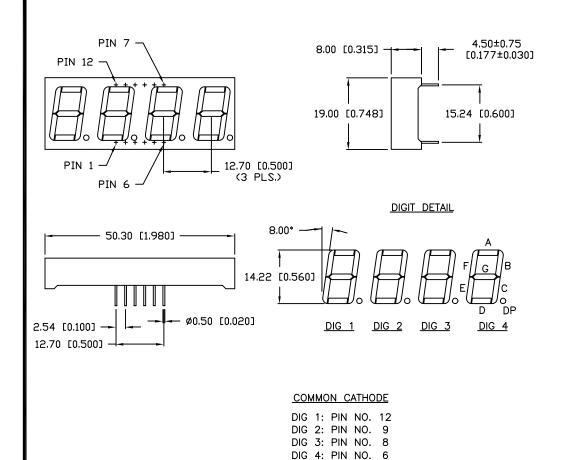

UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±.25mm (±0.010")

DU

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: LDQ-N514RI