
## UNCONTROLLED DOCUMENT


SSL-LX25593ID	

PART NUMBER

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR, & REDRAWN IN 3D.	7,2 <i>.</i> 01



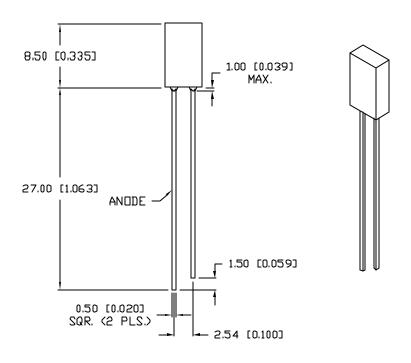

ELECTRO-OPTICAL CH	ARACTERIS	STICS TA=25°C		$I_f = 20mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635		nm	
FORWARD VOLTAGE		2.0	2,5	$V_{f}$	
reverse voltage	5.0			٧r	Ir=100μA
AXIAL INTENSITY		3		med	$I_f = 20mA$
VIEWING ANGLE		110		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	RED DIF	FUSED			

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	<b>'</b> C
SOLDERING TEMP.	+ 260	<b>'</b> C
2.0mm FROM BODY		3 SEC. MAX

<sup>\*</sup> t<10µS

UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.0305). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MN= +0.000 MAX.= +0.000 MAX.=

A SSL-LX25593ID

2.5mm x 5mm RECTANGULAR LED, 635nm RED LED, RED DIFFUSED LENS. CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLISSINGE AND DISSEMINATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WFB: www.lumex.com

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 2.24.95
PAGE: 1 OF 1
BC SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX25593ID