


1 TERMINAL WRAPAROUND: 0.007"(0.18mm) APPROX. ON BOTH ENDS


2 AVAILABLE IN 2 DIFFERENT SERIES

3 FOR FURTHER INFORMATION SEE DATA SHEET FOR
3650 SERIES-LOW INDUCTANCE,HIGH FREQUENCY CHIP INDUCTOR

Technical drawing of a rectangular plate. The drawing shows a side view of the plate with a central horizontal slot. The slot is defined by two parallel lines, with the upper line having a small semi-circular fillet. The plate has a uniform thickness. Dimension A is indicated by a vertical double-headed arrow on the left, representing the height of the plate. Dimension B is indicated by a horizontal double-headed arrow at the top, representing the width of the plate.

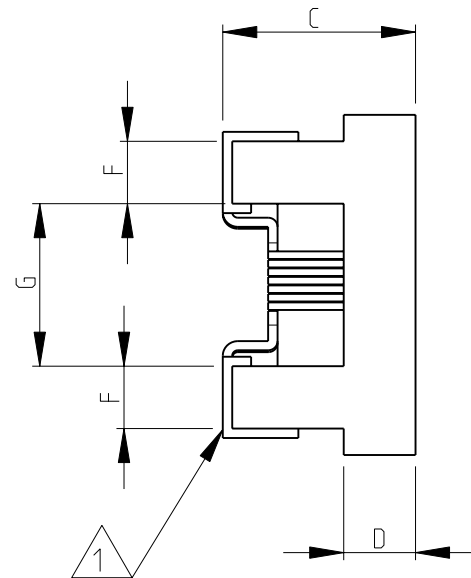

RoHS Compliant

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SUBHASH.M	14-NOV-08		TE Connectivity						
		CHK PRAKASH.S	14-NOV-08								
DIMENSIONS: mm		APVD STEPHEN.P	14-NOV-08		NAME LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR SERIES 3650						
		PRODUCT SPEC -									
		APPLICATION SPEC -		SIZE A 3		CAGE CODE 00779		DRAWING NO C- 1624112		RESTRICTED TO -	
MATERIAL -		FINISH -		WEIGHT -		CUSTOMER DRAWING					
						SCALE 20:1		SHEET 1 OF 1		REV BA1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[36501J1N8JTDG](#)