

# FLEX STACK

TW-20-07-T-D-550-SM

TW-25-02-F-S-260-SM

TW-10-04-L-D-300-SM

TW SERIES

(2.00 mm) .0787"

# SMT BOARD STACKERS

## SPECIFICATIONS

For complete specifications and recommended PCB layouts see [www.samtec.com?TW-SM](http://www.samtec.com?TW-SM)

**Insulator Material:** Black Liquid Crystal Polymer

**Terminal Material:** Phosphor Bronze

**Plating:** Sn or Au over 50 μm (1.27 μm) Ni

**Current Rating:** 4.9 A per pin (2 pins powered)

**Operating Temp Range:** -55 °C to +105 °C with Tin; -55 °C to +125 °C with Gold



**RoHS Compliant:** Yes

**Board Mates:** CLT, SQT, SQW, ESQT, TLE, SMM, MMS

**Cable Mates:** TCSD

## OTHER SOLUTIONS

- Stacker height ranges and standard part numbers on double row.

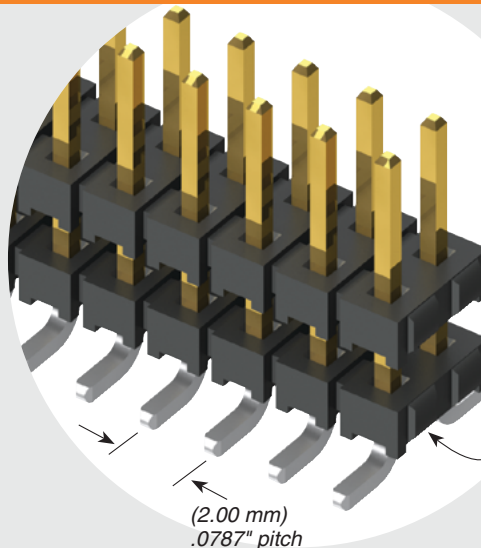

Available with optional pick & place pads

Available with optional alignment pins

(2.00 mm) .0787" pitch

## PROCESSING

**Lead-Free Solderable:** Yes

**SMT Lead Coplanarity:** (0.15 mm) .006" max\*  
\*(.004" stencil solution may be available; contact IPG@samtec.com)

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



FILE NO. E111394

## ALSO AVAILABLE (MOQ Required)

- Other Platings
- End shrouds with or without guide post

**Notes:** For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact [ipg@samtec.com](mailto:ipg@samtec.com) for more information.

This Series is non-standard, non-returnable.

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	SM	OTHER OPTIONS
	02 thru 36	Specify LEAD STYLE from chart below.	-F = Gold flash on post, Matte Tin on tail -L = 10 μm (0.25 μm) Gold on post, Matte Tin on tail -T = Matte Tin	-S = Single Row -D = Double Row	-"XXX" = Stacker Height in inches (0.13 mm) .005" increments Example: -250 = (6.35 mm) .250"		-"XXX" = Polarized Position -A = Alignment Pin (Metal or plastic at Samtec discretion) (4.83 mm) .190" min. board space (-D only) -P = Pick & Place Pad (1.91 mm) .075" min. post height (04-36 only) -TR = Tape & Reel Packaging (-07 lead style not available) (-06 lead style with -P option not available as a standard)

LEAD STYLE	OAL
-02	(7.85) .309
-03	(11.86) .467
-04	(12.37) .487
-06	(15.37) .605
-07	(17.35) .683
-09	(9.86) .388

ROW OPTION	A
-S	(5.08) .200
-D	(6.35) .250

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Samtec:

[TW-04-06-L-S-388-100](#) [TW-04-07-F-S-495-100](#) [TW-04-08-F-D-470-180](#) [TW-04-08-L-D-665-090](#) [TW-04-09-L-D-222-070](#) [TW-04-09-L-D-310-SM-P-TR](#) [TW-04-12-F-S-865-090](#) [TW-04-05-G-D-218-188](#) [TW-04-06-F-D-455-080](#) [TW-04-07-F-D-490-SM](#) [TW-04-07-G-D-450-165](#) [TW-02-01-F-S-154-065](#) [TW-02-01-L-D-160-075](#) [TW-02-03-F-S-236-118](#) [TW-02-03-F-S-400-075](#) [TW-02-06-L-D-450-SM-A-TR](#) [TW-02-06-L-S-145-100](#) [TW-02-07-L-D-527-100](#) [TW-02-09-T-D-228-114](#) [TW-03-02-T-S-160-109](#) [TW-03-02-T-S-197-130](#) [TW-03-02-T-S-200-SM](#) [TW-05-07-T-D-565-SM-A](#) [TW-05-08-F-D-300-200](#) [TW-05-08-L-D-480-100](#) [TW-05-09-F-D-265-SM-A-P-TR](#) [TW-05-09-F-D-313-SM-A-P](#) [TW-05-12-L-D-774-177](#) [TW-06-02-L-D-140-080](#) [TW-02-01-T-S-150-087](#) [TW-02-02-F-D-120-120](#) [TW-02-03-T-S-250-087](#) [TW-02-04-L-S-280-115](#) [TW-02-06-G-D-380-SM](#) [TW-02-07-F-D-430-100](#) [TW-11-02-L-S-190-100](#) [TW-11-03-L-D-255-145](#) [TW-11-03-L-T-263-115](#) [TW-11-08-F-D-550-120](#) [TW-12-03-L-D-300-090](#) [TW-12-05-F-D-250-130](#) [TW-12-07-S-D-555-SM-P](#) [TW-12-11-L-D-120-110](#) [TW-13-03-F-D-225-115](#) [TW-14-06-L-D-370-165](#) [TW-15-03-F-D-350-SM-P](#) [TW-15-03-L-D-235-SM-P](#) [TW-15-05-T-D-170-040](#) [TW-15-06-F-D-395-SM-A-P-TR](#) [TW-16-05-F-D-300-090](#) [TW-17-03-L-D-350-SM-A](#) [TW-18-04-F-D-345-SM-A-P](#) [TW-19-02-T-D-170-SM-P-TR](#) [TW-20-03-L-Q-242-120](#) [TW-20-04-L-D-390-SM-A](#) [TW-20-06-L-D-190-SM-A](#) [TW-20-06-L-D-350-080](#) [TW-20-09-L-D-265-100](#) [TW-03-07-L-D-450-SM](#) [TW-03-09-F-D-304-SM](#) [TW-03-09-G-D-160-110](#) [TW-03-09-T-S-180-175](#) [TW-04-03-F-S-270-SM-P](#) [TW-04-04-F-D-300-120](#) [TW-04-06-F-D-355-080](#) [TW-04-06-F-D-440-SM-TR](#) [TW-02-01-F-D-120-090](#) [TW-02-03-L-S-340-065](#) [TW-02-03-T-S-385-075](#) [TW-02-05-G-D-250-175](#) [TW-02-06-L-D-200-SM](#) [TW-02-06-T-D-400-136](#) [TW-02-07-G-D-375-SM](#) [TW-02-08-L-D-537-115](#) [TW-02-09-L-D-250-080](#) [TW-03-01-L-S-128-073](#) [TW-03-03-G-D-200-SM-A](#) [TW-03-03-L-S-160-080](#) [TW-03-05-F-D-200-157](#) [TW-03-06-F-D-250-SM](#) [TW-03-06-L-D-415-SM-A](#) [TW-03-06-T-D-388-SM-A](#) [TW-03-06-T-D-487-SM-A](#) [TW-04-12-L-D-775-175](#) [TW-05-02-F-D-135-100](#) [TW-05-02-T-D-197-090](#) [TW-05-03-G-D-120-210](#) [TW-05-03-L-S-285-130](#) [TW-05-03-T-D-251-SM](#) [TW-05-04-L-D-365-SM-A-P-TR](#) [TW-05-06-F-D-455-SM-A](#) [TW-02-03-L-D-243-SM](#) [TW-02-05-L-D-287-130](#) [TW-02-05-T-S-375-110](#) [TW-02-06-G-D-386-142](#) [TW-02-08-S-D-510-235](#) [TW-02-09-G-D-180-090](#) [TW-02-09-L-D-295-SM-TR](#) [TW-02-10-F-D-294-110](#) [TW-02-12-F-D-750-175](#)