




UNIT: mm

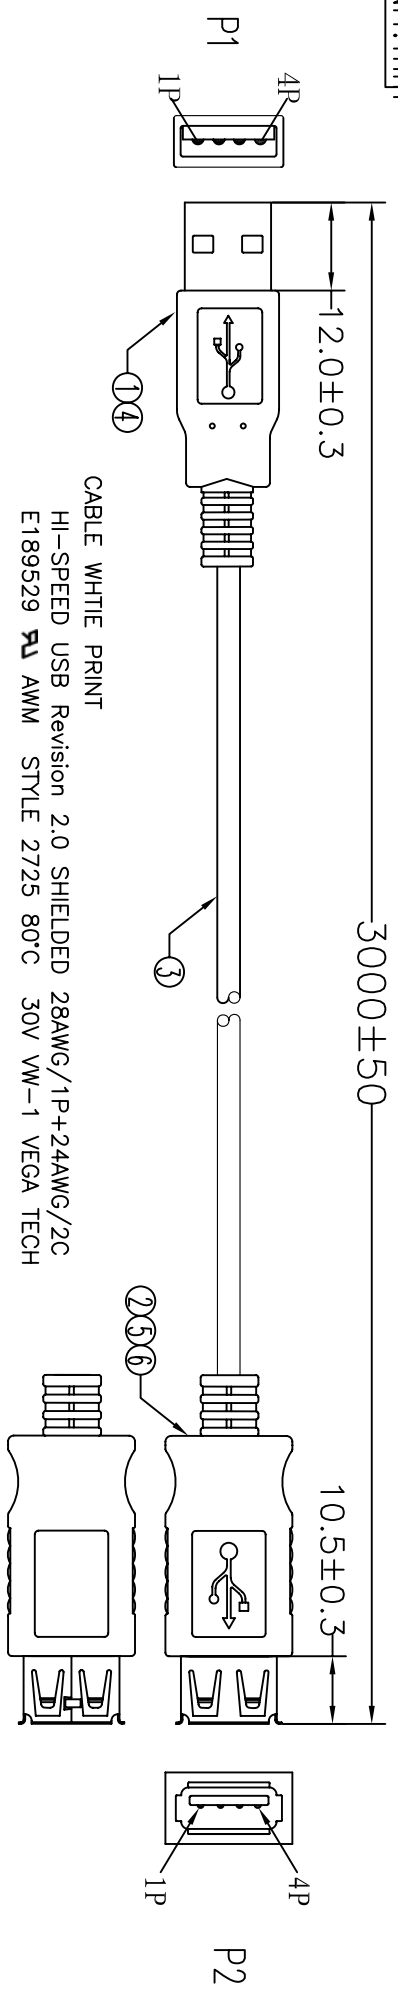

PIN ASSIGNMENT:

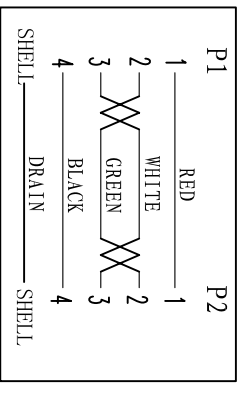

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 5Mohm(min)  
 4. dielectric test: DC 300V

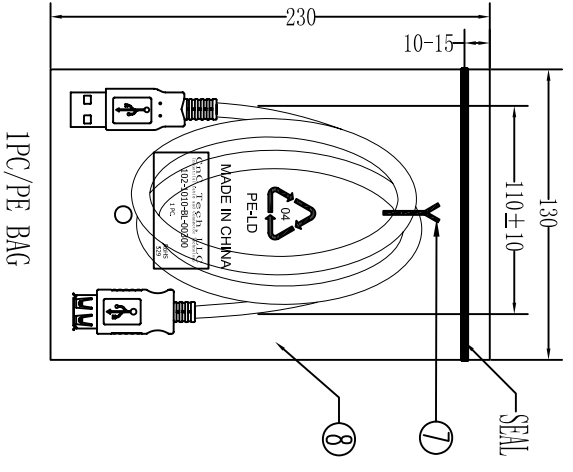

⑨	PE BAG	1/10	CLEAR SIZE: 280*330*40.05mm PRINT BLACK"MADE IN CHINA"+"10PCS" 及印生产周期,有透气孔.
⑧	PE BAG	1	CLEAR SIZE: 130*230*40.05mm PRINT BLACK"MADE IN CHINA" 及印生产周期,有透气孔.
⑦	TIE	1	BLACK L=100mm
⑥	IN JACKET	3g	CLEAR LDPE (MOULD NO: NM-027)
⑤	OUT JACKET	7g	BLACK PVC-45P (MOULD NO: MW-83)
④	OUT JACKET	6g	BLACK PVC-45P (MOULD NO: MW-40)
③	CABLE	1	BLACK USB2.0 U12725 28#/1P+24#/2C+ABE3 OD: 4.7mm L=3000±15mm
②	CONN	1	USB2.0 A FEMALE SHELL: NICKEL PIN G/F SHORT TYPE INSULATOR COLOR: WHITE
①	CONN	1set	USB2.0 A MALE SHELL: NICKEL PIN G/F 3PCS-TYPE INSULATOR COLOR: WHITE
NO.	NAME	QTY	SPECIFICATION

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1010-BL-00300
DECIDED		DATE	2013-8-23
VERSIONS/EDITION	A/0	PROJECTION	

4 3 2 1 4 3 2 1