
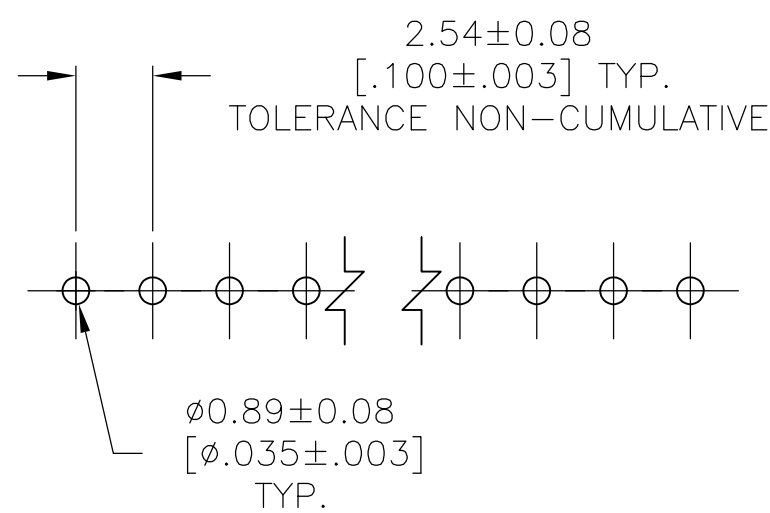
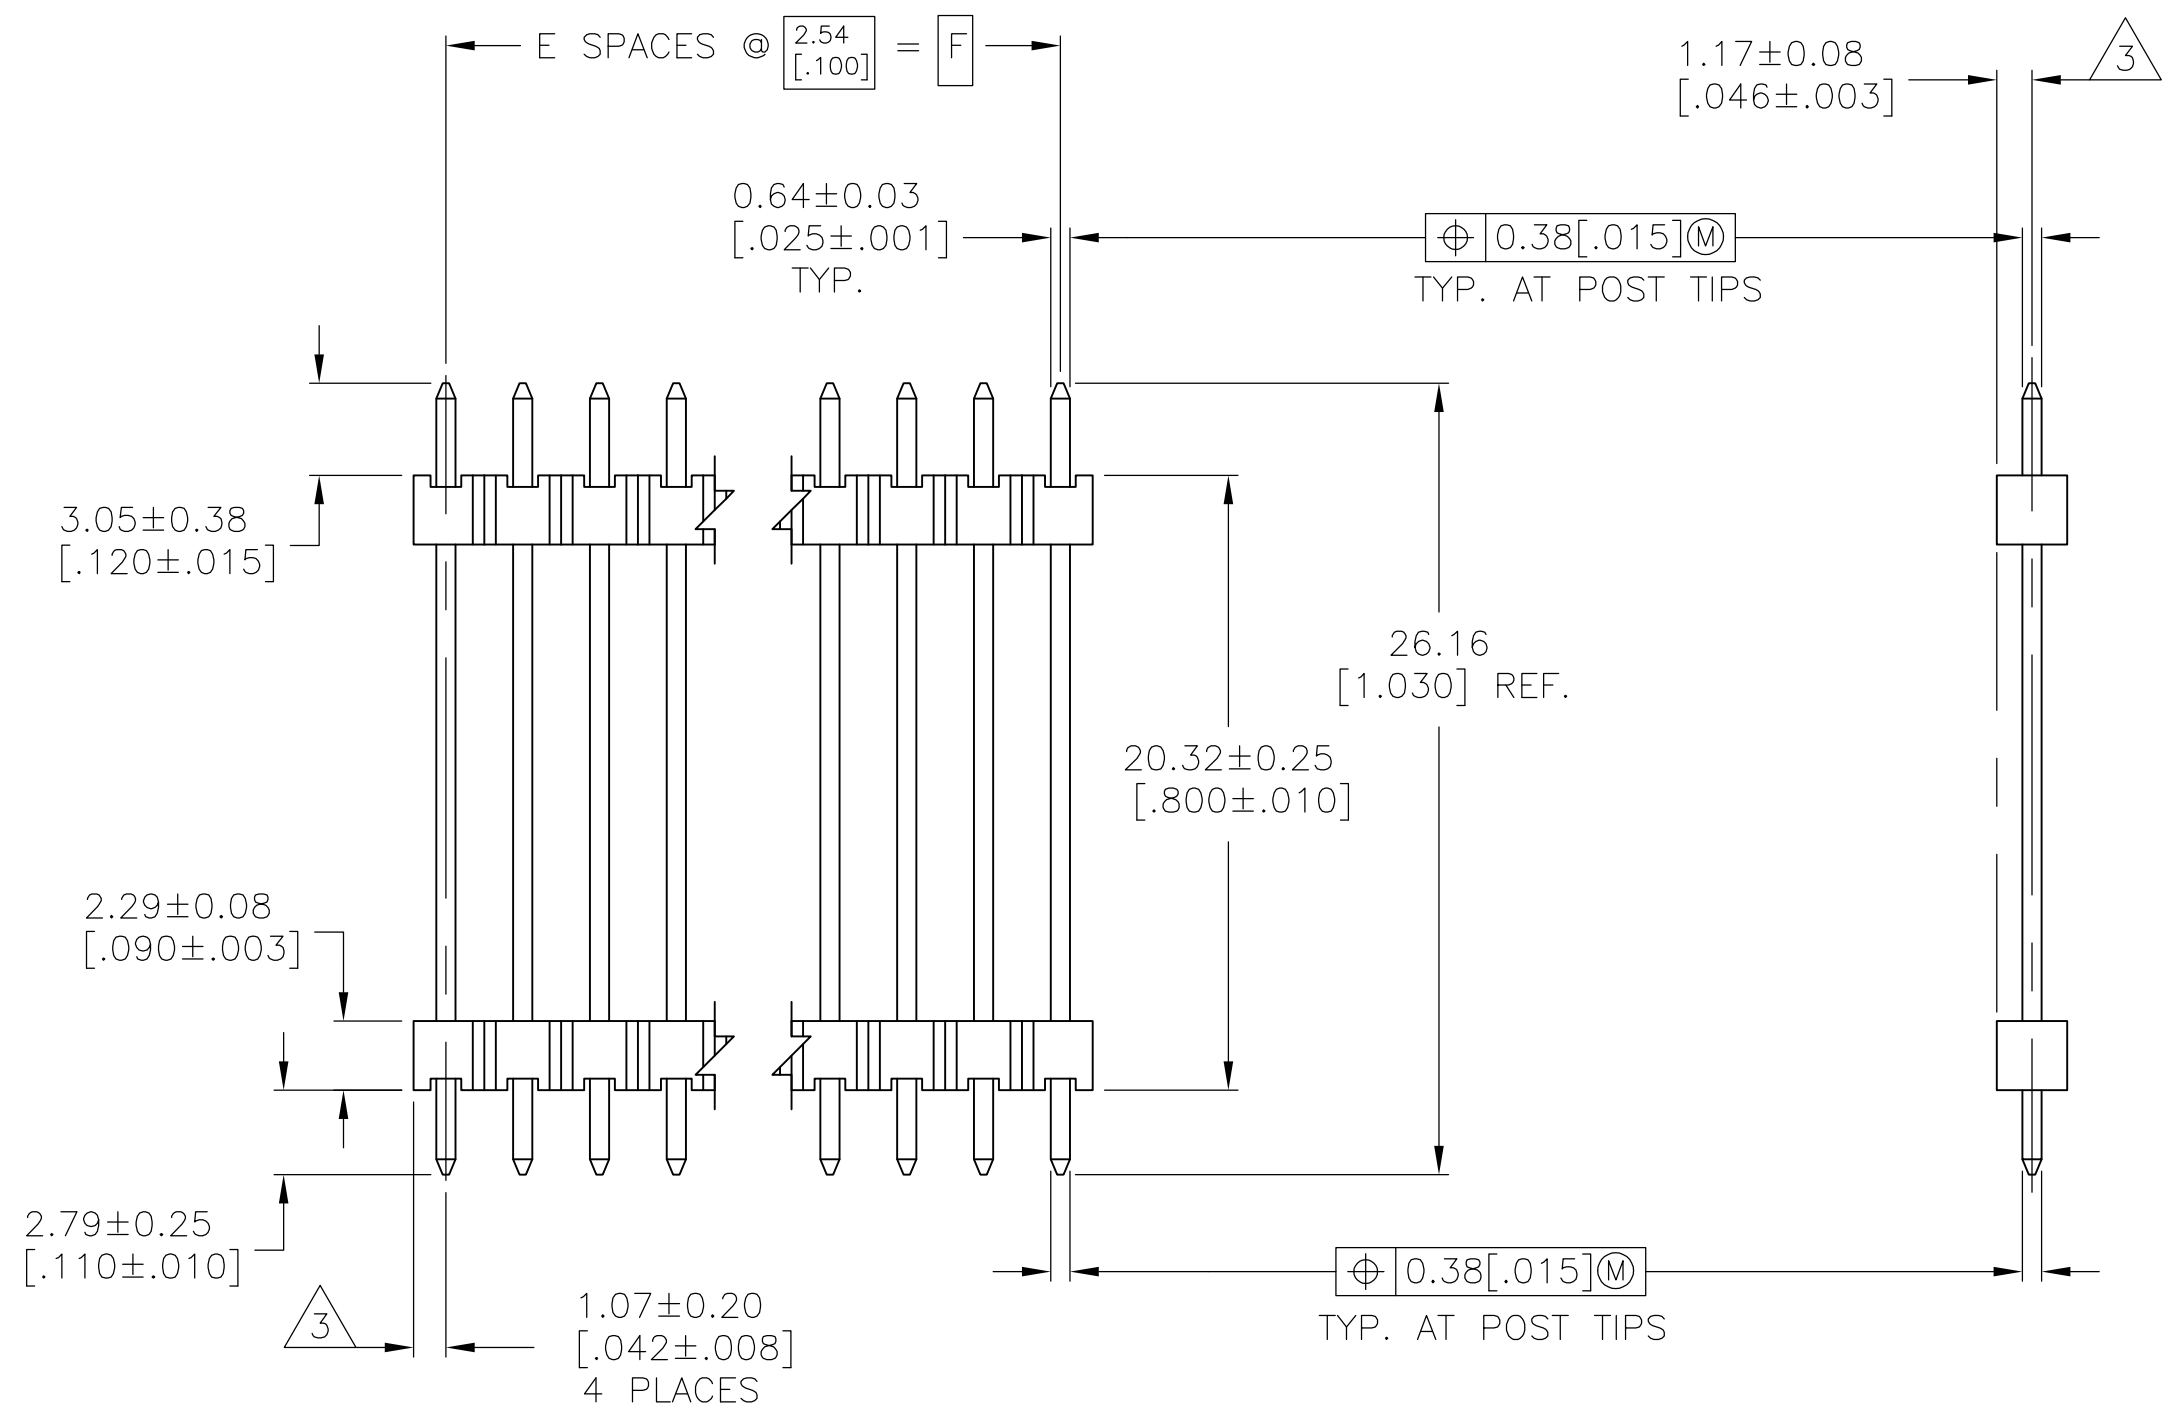


LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

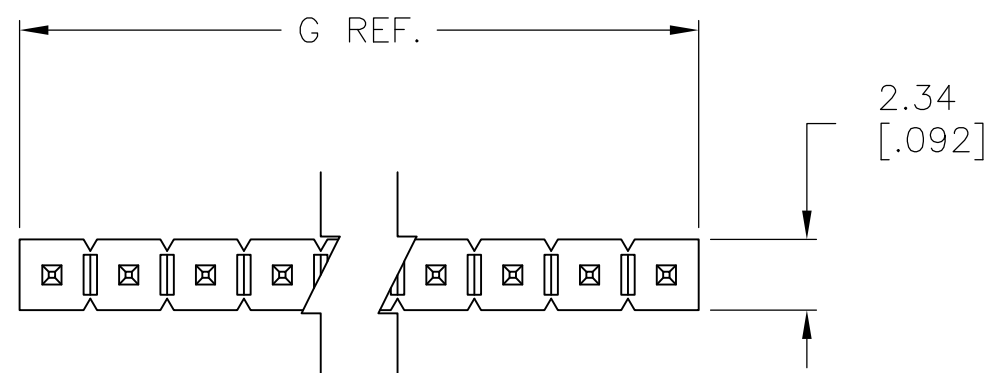

RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.00254–0.00508 [.000100–.000200] BRIGHT TIN–LEAD OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254–0.00508 [.000100–.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL ENTIRE POST.

6	101.19 [3.984]	99.06 [3.900]	39	40	9-146468-0
6	98.65 [3.884]	96.52 [3.800]	38	39	8-146468-9
6	96.11 [3.784]	93.98 [3.700]	37	38	8-146468-8
6	93.57 [3.684]	91.44 [3.600]	36	37	8-146468-7
6	91.03 [3.584]	88.90 [3.500]	35	36	8-146468-6
6	88.49 [3.484]	86.36 [3.400]	34	35	8-146468-5
6	85.95 [3.384]	83.82 [3.300]	33	34	8-146468-4
6	83.41 [3.284]	81.28 [3.200]	32	33	8-146468-3
6	80.87 [3.184]	78.74 [3.100]	31	32	8-146468-2
6	78.33 [3.084]	76.20 [3.000]	30	31	8-146468-1
6	75.79 [2.984]	73.66 [2.900]	29	30	8-146468-0
6	73.25 [2.884]	71.12 [2.800]	28	29	7-146468-9
6	70.71 [2.784]	68.58 [2.700]	27	28	7-146468-8
6	68.17 [2.684]	66.04 [2.600]	26	27	7-146468-7
6	65.63 [2.584]	63.50 [2.500]	25	26	7-146468-6
6	63.09 [2.484]	60.96 [2.400]	24	25	7-146468-5
6	60.55 [2.384]	58.42 [2.300]	23	24	7-146468-4
6	58.01 [2.284]	55.88 [2.200]	22	23	7-146468-3
6	55.47 [2.184]	53.34 [2.100]	21	22	7-146468-2
6	52.93 [2.084]	50.80 [2.000]	20	21	7-146468-1
6	50.39 [1.984]	48.26 [1.900]	19	20	7-146468-0
6	47.85 [1.884]	45.72 [1.800]	18	19	6-146468-9
6	45.31 [1.784]	43.18 [1.700]	17	18	6-146468-8
6	42.77 [1.684]	40.64 [1.600]	16	17	6-146468-7
6	40.23 [1.584]	38.10 [1.500]	15	16	6-146468-6
6	37.69 [1.484]	35.56 [1.400]	14	15	6-146468-5
6	35.15 [1.384]	33.02 [1.300]	13	14	6-146468-4
6	32.61 [1.284]	30.48 [1.200]	12	13	6-146468-3
6	30.07 [1.184]	27.94 [1.100]	11	12	6-146468-2
6	27.53 [1.084]	25.40 [1.000]	10	11	6-146468-1
6	24.99 [.984]	22.86 [.900]	9	10	6-146468-0
6	22.45 [.884]	20.32 [.800]	8	9	5-146468-9
6	19.91 [.784]	17.78 [.700]	7	8	5-146468-8
6	17.37 [.684]	15.24 [.600]	6	7	5-146468-7
6	14.83 [.584]	12.70 [.500]	5	6	5-146468-6
6	12.29 [.484]	10.16 [.400]	4	5	5-146468-5
6	9.75 [.384]	7.62 [.300]	3	4	5-146468-4
6	7.21 [.284]	5.08 [.200]	2	3	5-146468-3
6	4.67 [.184]	2.54 [.100]	1	2	5-146468-2
6	2.13 [.084]	-	-	1	5-146468-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	101.19 [3.984]	99.06 [3.900]	39	40	4-146468-0
5	98.65 [3.884]	96.52 [3.800]	38	39	3-146468-9
5	96.1 [3.784]	93.98 [3.700]	37	38	3-146468-8
5	93.57 [3.684]	91.44 [3.600]	36	37	3-146468-7
5	91.03 [3.584]	88.90 [3.500]	35	36	3-146468-6
5	88.49 [3.484]	86.36 [3.400]	34	35	3-146468-5
5	85.95 [3.384]	83.82 [3.300]	33	34	3-146468-4
5	83.41 [3.284]	81.28 [3.200]	32	33	3-146468-3
5	80.87 [3.184]	78.74 [3.100]	31	32	3-146468-2
5	78.33 [3.084]	76.20 [3.000]	30	31	3-146468-1
5	75.79 [2.984]	73.66 [2.900]	29	30	3-146468-0
5	73.25 [2.884]	71.12 [2.800]	28	29	2-146468-9
5	70.71 [2.784]	68.58 [2.700]	27	28	2-146468-8
5	68.17 [2.684]	66.04 [2.600]	26	27	2-146468-7
5	65.63 [2.584]	63.50 [2.500]	25	26	2-146468-6
5	63.09 [2.484]	60.96 [2.400]	24	25	2-146468-5
5	60.55 [2.384]	58.42 [2.300]	23	24	2-146468-4
5	58.01 [2.284]	55.88 [2.200]	22	23	2-146468-3
5	55.47 [2.184]	53.34 [2.100]	21	22	2-146468-2
5	52.93 [2.084]	50.80 [2.000]	20	21	2-146468-1
5	50.39 [1.984]	48.26 [1.900]	19	20	2-146468-0
5	47.85 [1.884]	45.72 [1.800]	18	19	1-146468-9
5	45.31 [1.784]	43.18 [1.700]	17	18	1-146468-8
5	42.77 [1.684]	40.64 [1.600]	16	17	1-146468-7
5	40.23 [1.584]	38.10 [1.500]	15	16	1-146468-6
5	37.69 [1.484]	35.56 [1.400]	14	15	1-146468-5
5	35.15 [1.384]	33.02 [1.300]	13	14	1-146468-4
5	32.61 [1.284]	30.48 [1.200]	12	13	1-146468-3
5	30.07 [1.184]	27.94 [1.100]	11	12	1-146468-2
5	27.53 [1.084]	25.40 [1.000]	10	11	1-146468-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146468-0
5	22.45 [.884]	20.32 [.800]	8	9	146468-9
5	19.91 [.784]	17.78 [.700]	7	8	146468-8
5	17.37 [.684]	15.24 [.600]	6	7	146468-7
5	14.83 [.584]	12.70 [.500]	5	6	146468-6
5	12.29 [.484]	10.16 [.400]	4	5	146468-5
5	9.75 [.384]	7.62 [.300]	3	4	146468-4
5	7.21 [.284]	5.08 [.200]	2	3	146468-3
5	4.67 [.184]	2.54 [.100]	1	2	146468-2
5	2.13 [.084]	-	-	1	146468-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.						OWN E. BRANDBERG		05-MAR-97				TE Connectivity			
DIMENSIONS: mm [INCHES]						TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P/LC ± — 1 P/LC ± — 2 P/LC ± 0.51[.02] 3 P/LC ± 0.127[.005] 4 P/LC ± 0.076[.003] ANGLES FINISH SEE TABLE						CHK G. DUBNICZKI		05-MAR-97	
												APPROV G. DUBNICZKI		05-MAR-97	
						NAME									
						PRODUCT SPEC APPLICATION SPEC									
MATERIAL 						HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED									
						SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO		—	
WEIGHT —						A1		00779		C146468		—			
						CUSTOMER DRAWING								SCALE 4:1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-146468-2](#)