


RECOMMENDED HOLE LAYOUT

4805 (1/15)

А

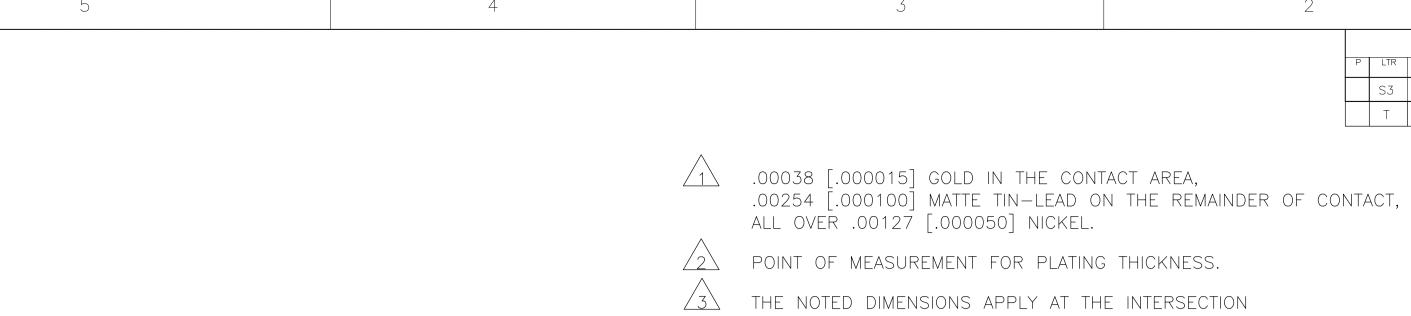

| 2 | | | 1 | | |
|-----------|-------|---------------------------|-----------|-----|------|
| | | REVISIONS | | | |
| | P LTR | DESCRIPTION | DATE | DWN | APVD |
| | S3 | REVISED PER ECO-16-013470 | 20SEP2016 | BW | MM |
| | Т | REVISED PER ECO-17-002584 | 11APR2017 | BDA | MM |
| · · · · · | | | | | |

D

| | | | | 1 | | | | | |
|--|---|--|-------------------------------|-------------------|--|-------------------|--------------|-------|--|
| | | \land | 64.01 [2.520] | 65.91 [2.595] | 24 | 25 | 2-103635-4 | | |
| | | 1 | 61.47 [2.420] | 63.37 [2.495] | 23 | 24 | 2-103635-3 | | |
| E | | \square | 58.93 [2.320] | 60.83 [2.395] | 22 | 23 | -2-103635-2- | С | |
| 5-1 | | \land | 56.39 [2.220] | 58.29 [2.295] | 21 | 22 | -2-103635-1- | | |
| Ē | | Δ | 53.85 [2.120] | 55.75 [2.195] | 20 | 21 | -2-103635-0- | | |
| | | Δ | 51.31 [2.020] | 53.21 [2.095] | 19 | 20 | 1-103635-9 | | |
| E | | \square | 48.77 [1.920] | 50.67 [1.995] | 18 | 19 | -1-103635-8- | , | |
| | | \square | 46.23 [1.820] | 48.13 [1.895] | 17 | 18 | 1-103635-7 | | |
| 5-6 | | \square | 43.69 [1.720] | 45.59 [1.795] | 16 | 17 | -1-103635-6- | | |
| | | \square | 41.15 [1.620] | 43.05 [1.695] | 15 | 16 | 1-103635-5 | | |
| | | \square | 38.61 [1.520] | 40.51 [1.595] | 14 | 15 | 1-103635-4 | | |
| | | \square | 36.07 [1.420] | 37.97 [1.495] | 13 | 14 | 1-103635-3 | | |
| | | \square | 33.53 [1.320] | 35.43 [1.395] | 12 | 13 | 1-103635-2 | | |
| | $\boxed{6}$ | | 30.99 [1.220] | 32.89 [1.295] | 1 1 | 12 | 1-103635-1 | В | |
| | | | 28.45 [1.120] | 30.35 [1.195] | 10 | 1 1 | 1-103635-0 | | |
| | | | 25.91 [1.020] | 27.81 [1.095] | 9 | 10 | 103635-9 | | |
| | | \square | 23.37 [.920] | 25.27 [.995] | 8 | 9 | 103635-8 | | |
| | | | 20.83 [.820] | 22.73 [.895] | 7 | 8 | 103635-7 | | |
| | | | 18.29 [.720] | 20.19 [.795] | 6 | 7 | 103635-6 | | |
| | | | 15.75 [.620] | 17.65 [.695] | 5 | 6 | 103635-5 | | |
| | | | 13.21 [.520] | 15.11 [.595] | 4 | 5 | 103635-4 | | |
| | | | 10.67 [.420] | 12.57 [.495] | 3 | 4 | 103635-3 | | |
| | | | 8.13 [.320] | 10.03 [.395] | 2 | 3 | 103635-2 | | |
| | | | 5.59 [.220] | 7.49 [.295] | 1 | 2 | 103635-1 | | |
| | REMARK | PLATING | С | В | A | NO. OF POSN | PART NO. | A | |
| THIS D | i Rawing is a cot | NTROLLED DOCUMENT. | S. SHUEY | 5-3-91 (7-3-91 | STE | TE | Connectivity | | |
| DIMENSIONS: TOLERANCES UNLESS OTHERWISE SPECIFIED: mm [INCHES] | | L. CASTAGNA APVD 27-3-91 NAME L. CASTAGNA PRODUCT SPEC HDRASSY, RTANG, SGLEROW | | | | | | | |
| | | $\begin{array}{cccccccccccccccccccccccccccccccccccc$ | 108-25034 Application spec | | 2.54[.100]C/L,0.64[.025]SQPST, WITHPLZN&LATCHING,AMPMODUMTE | | | | |
| MATERIAL | HOUSING : F | NGLES ± - Finish | | | | | | | |
| | FLAME RETARDANT LCP, COLOR- BLACK | SEE TABLE | _ | | | | SHEET OF REV | | |
| | CONTACTS: BRASS | | CUSTOMER DRAW | ING | SCALE 4:1 SHEET 1 OF 2 REV T | | | | |

| | 8 | | 7 | 6 |
|---|------------------------------|---------------------------------------|------------|---|
| | THIS DRAWING IS UNPUBLISHED. | FOR PUBLICATION . RIGHTS RESERVED. | - , | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| D | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| С | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| В | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| A | | | | |
| | | | | |
| | | | | |
| | | | | |

4805 (1/15)

| | \int_{6} | | | 64.01 [2.520] | | 65.91 2.595] 24 | | 25 | 7-103635-4 |
|---|---|--------------|-------------------------------|--|--|-------------------------------|-------------------|----------|--------------|
| | 6 | | 5 | 61.47 [2.420] | | 3.37 2.495] | 23 | 24 | 7-103635-3 |
| | 6 | | 5 | 58.93 [2.320] | | 50.83 .395] | 22 | 23 | -7-103635-2- |
| | 6 | | | 56.39 [2.220] | _ | 8.29 .295] | 21 | 22 | 7-103635-1 |
| | 6 | | | 53.85 [2.120] | [2 | 5.75 .195] | 20 | 21 | -7-103635-0- |
| | 6 | | 5 | 51.31 [2.020] | | 53.21 .095] | 19 | 20 | 6-103635-9 |
| | 6 | | $\sqrt{5}$ | 48.77 [1.920] [| | 60.67 .995] | 18 | 19 | -6-103635-8- |
| | \int_{6} | | $\sqrt{5}$ | 46.23 [1.820] | | -8.13 .895] | 17 | 18 | 6-103635-7 |
| | 6 | | 5 | 43.69 [1.720] | _ | -5.59 .795] | 16 | 17 | 6-103635-6 |
| | 6 | | 5 | 41.15 | | -3.05 .695] | 15 | 16 | 6-103635-5 |
| | \int_{6} | | $\sqrt{5}$ | 38.61 [1.520] | [1 | -0.51 .595] | 14 | 15 | 6-103635-4 |
| | \int_{6} | | $\sqrt{5}$ | 36.07 [1.420] | [1. | 7.97 495] | 13 | 14 | 6-103635-3 |
| | 6 | | 5 | 33.53 [1.320] | | 5.43 .395] | 12 | 13 | 6-103635-2 |
| | 6 | | 5 | 30.99 [1.220] | [1 | 2.89 .295] | 1 1 | 12 | 6-103635-1 |
| | | | 5 | 20.10 | | 0.35 .195] | 10 | 1 1 | 6-103635-0 |
| | 6 | | 5 | | | 7.81 .095] | 9 | 10 | 5-103635-9 |
| | 6 | | | [.920] [| | 5.27 995] | 8 | 9 | 5-103635-8 |
| | 6 | | 5 | [.820] [| | 2.73 895] | 7 | 8 | 5-103635-7 |
| | 6 | | 5 | [.720] [15.75 [.620] [13.21 | | :0.19 795] | 6 | 7 | 5-103635-6 |
| | 6 | | 5 | | | 7.65 695] | 5 | 6 | 5-103635-5 |
| | 6 | | 5 | | | 5.11 595] | 4 | 5 | 5-103635-4 |
| | \int_{6} | | | 10.67 [.420] | | 2.57 495] | 3 | 4 | 5-103635-3 |
| | \int_{6} | | | 8.13 [.320] | | 0.03 .395] | 2 | 3 | 5-103635-2 |
| | 6 | | | 5.59 [.220] | | 7.49 .295] | 1 | 2 | 5-103635-1 |
| | REMARKS PLATING | | С | | 3 | А | NO. OF POSN | PART NO. | |
| RAW | RAWING IS A CONTROLLED DOCUMENT. | | | S. SHUEY CHK 2 ⁻ | 5-3-91 7-3-91 | | E TE | TE (| Connectivity |
| | IMENSIONS: TOLERANCES UNLESS OTHERWISE SPECIFIED: Im [INCHES] | | | L. CASTAGNA | | NAME HDRASSY,RTANG,SGLEROW | | | |
| $\bigcirc \bigcirc $ | | ± ± | 108-25034 Application spec | | 2.54[.100]C/L,0.64[.025]SQPST, WITHPLZN&LATCHING,AMPMODUMTE | | | | |
| HOUSIN FLAME LCP | G : RETARDANT | GLES NISH | ± _ | 114-25026 Size CAGE CODE DRAWING NO RESTRICTED TO WEIGHT A 1 00779 C = 103635 | | | | | |
| | R- BLACK ACTS: BRASS | | | CUSTOMER DRAWING | | | | | |

THIS DRAW DIMEN mm [

OBSOLETE OBSOLETE OBSOLETE

3

5

4

1 2 REVISIONS DESCRIPTION P LTR – SEE SHEET 1

D

С

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 103635-6