

SCALE 6.000

NOTES:


1. MATERIALS AND PLATING:

BODY: BRASS, GOLD PLATED
 CONTACT: BRASS, GOLD PLATED
 RING: BERYLLIUM COPPER, GOLD PLATED
 FERRULE: COPPER ALLOY, GOLD PLATED
 INSULATOR: PTFE


2. FOR CABLE STRIPPING AND ASSEMBLY INSTRUCTIONS
 SEE 349-50627, SHT 3. USE CRIMP TOOL 227-944
 WITH DIE SET 227-1221-37 (.151 HEX.)

3. CONTACT AND FERRULE ARE SHIPPED LOOSE.

908-41500		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	11/7/96	41601	BCG
	B	SEE SHEET 1	4/27/00	43271	CPM
	C	SEE SHEET 1	2/21/01	43666	CPM

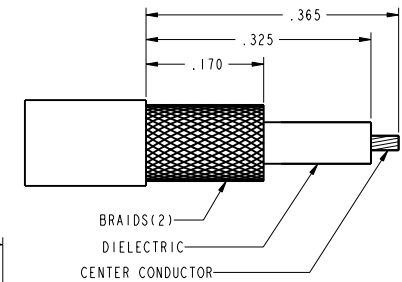

CABLE STRIPPING DIMENSIONS

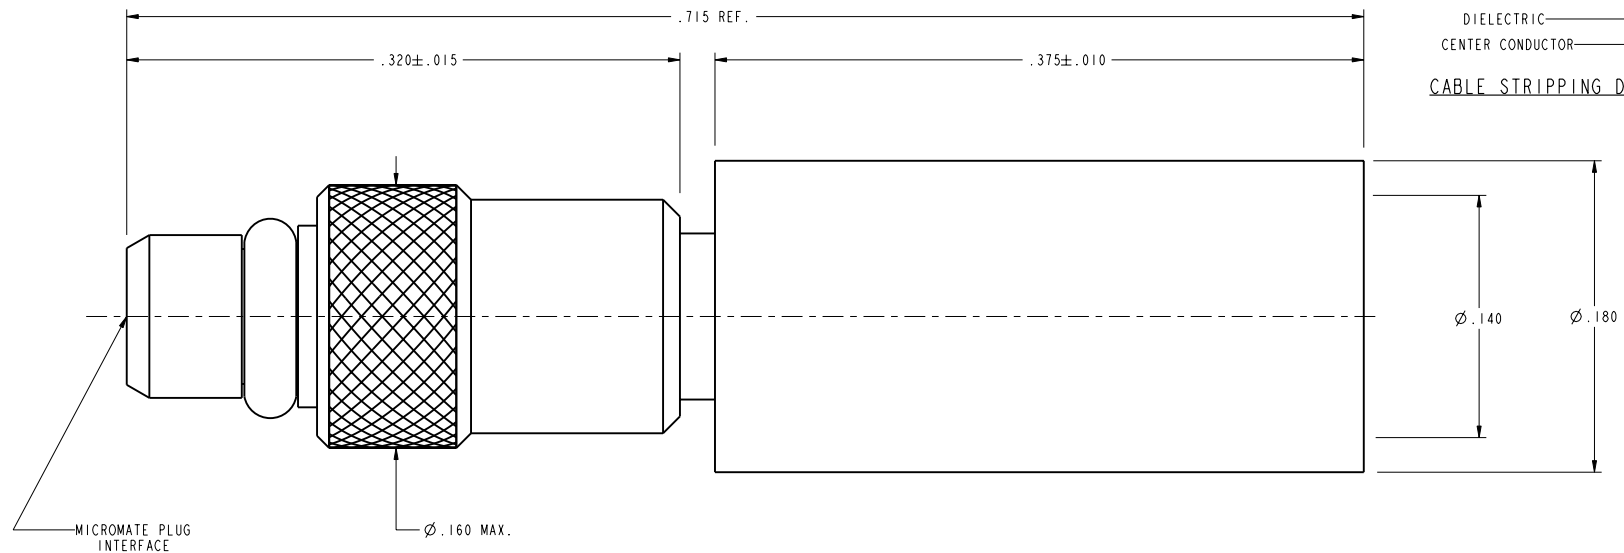

CUSTOMER OUTLINE DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN B. GLEISSNER	DATE 10-Oct-96	TITLE MICROMATE PLUG, CRIMP TYPE FOR RD-316 CABLE	Amphenol Amphenol Corporation Communication and Network Products Division Danbury, CT U.S.A. 06810
	REFERENCE EAR 964688-0 GEN# ASSYM3_MMCX	ENGINEER B. GLEISSNER	DATE 10-Oct-96		
		APPROVED B. GLEISSNER	DATE 10/29/96	SCALE: 15.0:1	SHEET 2 OF 2
		CAD FILE I:\MMCX\908-41500		CODE ID 74868	DWG SIZE B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[908-41500](#)