


| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | AA7 | REVISED PER ECO-16-004223 | 19JUL2016 | NK  | MZ   |
|           | AB  | REVISED PER ECO-16-017881 | 16MAR2017 | BDA | MZ   |

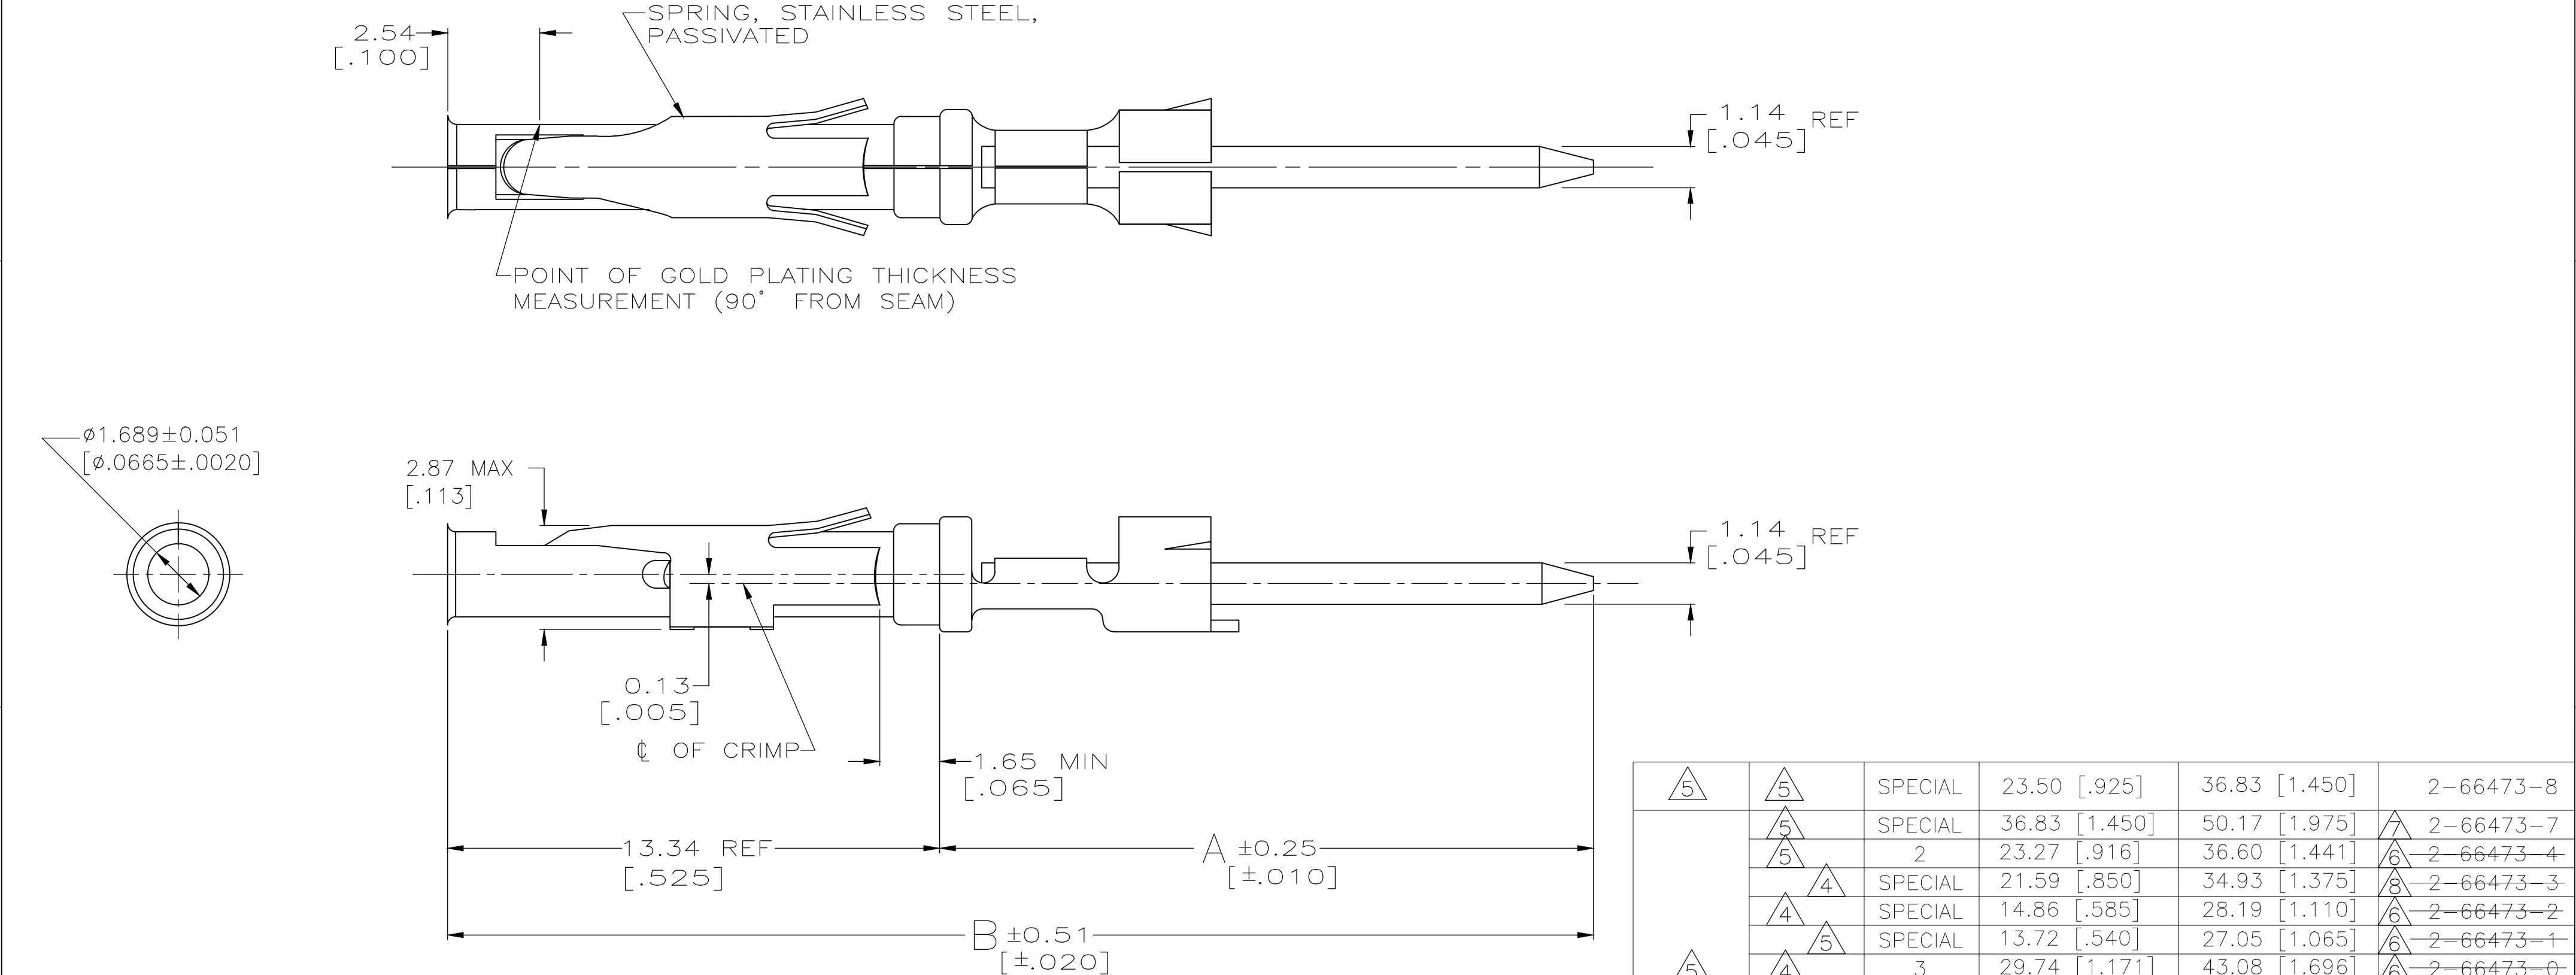

- 1
- GOLD PLATING NEED NOT APPEAR ON INSULATION SUPPORT STABILIZER.
- 2
- 2.54um [.000100] MIN TIN-LEAD PER 112-26-1 OVER 1.27um [.000050] MIN NICKEL PER 112-25-2.
- 3
- 2.54um [.000100] MIN TIN-LEAD OVER 1.27um [.000050] MIN NICKEL.
- 4
- 0.76um [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25um [.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER 0.76um [.000030] MIN NICKEL PER QQ-N-290.
- 5
- 2.54um [.000100] MIN TIN OVER 1.27um [.000050] MIN NICKEL.
- 6
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.
- 7
- PRELIMINARY PART.
- 8
- OBSOLETE PART.

|               |               |            |               |               |             |
|---------------|---------------|------------|---------------|---------------|-------------|
| 5             | 5             | SPECIAL    | 23.50 [.925]  | 36.83 [1.450] | 2-66473-8   |
| 5             | 5             | SPECIAL    | 36.83 [1.450] | 50.17 [1.975] | 2-66473-7   |
|               | 5             | 2          | 23.27 [.916]  | 36.60 [1.441] | 2-66473-4   |
|               | 4             | SPECIAL    | 21.59 [.850]  | 34.93 [1.375] | 2-66473-3   |
|               | 4             | SPECIAL    | 14.86 [.585]  | 28.19 [1.110] | 2-66473-2   |
|               | 5             | SPECIAL    | 13.72 [.540]  | 27.05 [1.065] | 2-66473-1   |
|               | 4             | 3          | 29.74 [1.171] | 43.08 [1.696] | 2-66473-0   |
|               | 4             | 1          | 17.81 [.701]  | 31.14 [1.226] | 1-66473-9   |
|               | 5             | 3          | 29.74 [1.171] | 43.08 [1.696] | 1-66473-8   |
|               | 5             | 1          | 17.81 [.701]  | 31.14 [1.226] | 1-66473-7   |
|               | 4             | 2          | 23.27 [.916]  | 36.60 [1.441] | 1-66473-6   |
| 3             | 4             | SPECIAL    | 14.86 [.585]  | 28.19 [1.110] | 1-66473-5   |
|               | 2             | SPECIAL    | 13.72 [.540]  | 27.05 [1.065] | 1-66473-4   |
|               | 4             | 2          | 23.27 [.916]  | 36.60 [1.441] | 1-66473-1   |
|               | 4             | 1          | 17.81 [.701]  | 31.14 [1.226] | 1-66473-0   |
|               | 4             | 3          | 29.74 [1.171] | 43.08 [1.696] | 66473-9     |
|               | 4             | 1          | 17.81 [.701]  | 31.14 [1.226] | 66473-7     |
|               | 2             | 3          | 29.74 [1.171] | 43.08 [1.696] | 66473-3     |
|               | 2             | 1          | 17.81 [.701]  | 31.14 [1.226] | 66473-1     |
| FINISH (POST) | FINISH (BODY) | NO OF TERM | A             | B             | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN  
D. HARDY  
05/02/94

CHK  
W.G. LENKER  
05/17/94

APVD  
—

PRODUCT SPEC  
—

APPLICATION SPEC  
—

WEIGHT  
—

MATERIAL  
BRASS PER ASTM B-36

FINISH  
—

CUSTOMER DRAWING

SCALE  
8:1

SHEET  
1 OF 1

REV  
AB

**TE** TE Connectivity

NAME  
SOCKET CONTACT, CRIMPED  
1.57 [.062] DIA, 1.14 [.045] x  
1.14 [.045] POST (W.W.)

SIZE  
A2

CAGE CODE  
00779

DRAWING NO  
C-66473

RESTRICTED TO  
—

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-66473-6](#)