

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

© COPYRIGHT - By -



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER ECO-08-032010	26MAR09	HMR	MS
	G	REVISED PER ECO-16-006378	03NOV2016	RS	MZ

1 HOUSING, ADAPTER AND PRESSURE PLATE: NYLON, BLACK.
WIRE ENTRY SEAL: ELASTOMER, RED-IRON OXIDE.
PERIPHERAL SEAL: ELASTOMER, GRAY.

2 CONNECTOR WILL ACCEPT (16) MULTIMATE PIN CONTACTS.

3 PART NUMBER STAMPED ON EITHER STRAIGHT EDGE, AS
INDICATED.

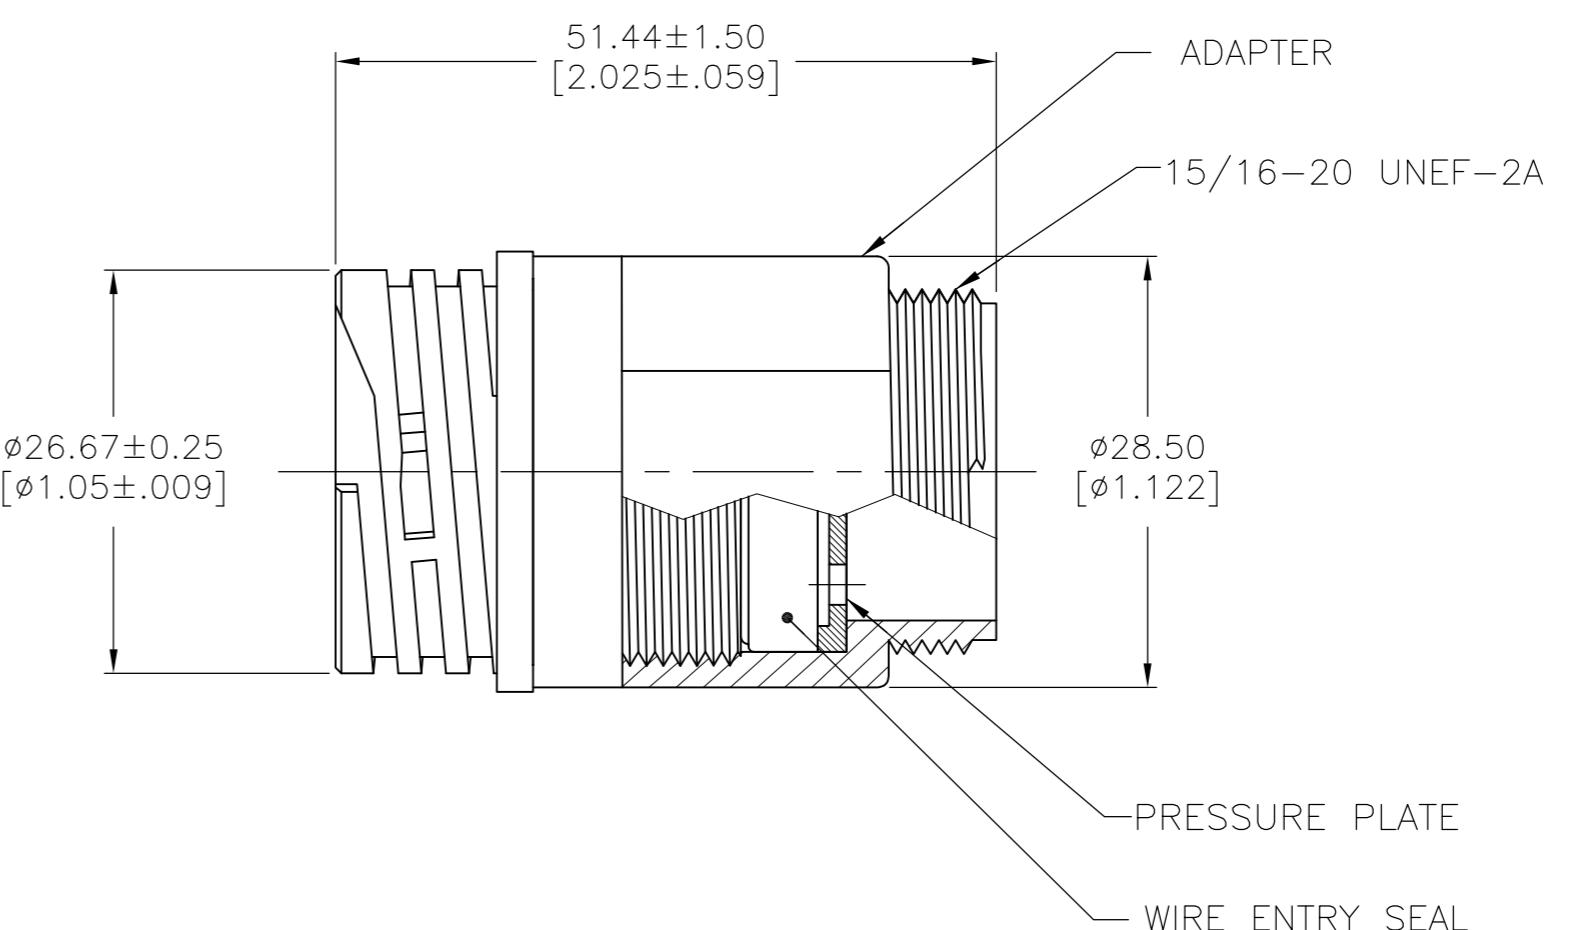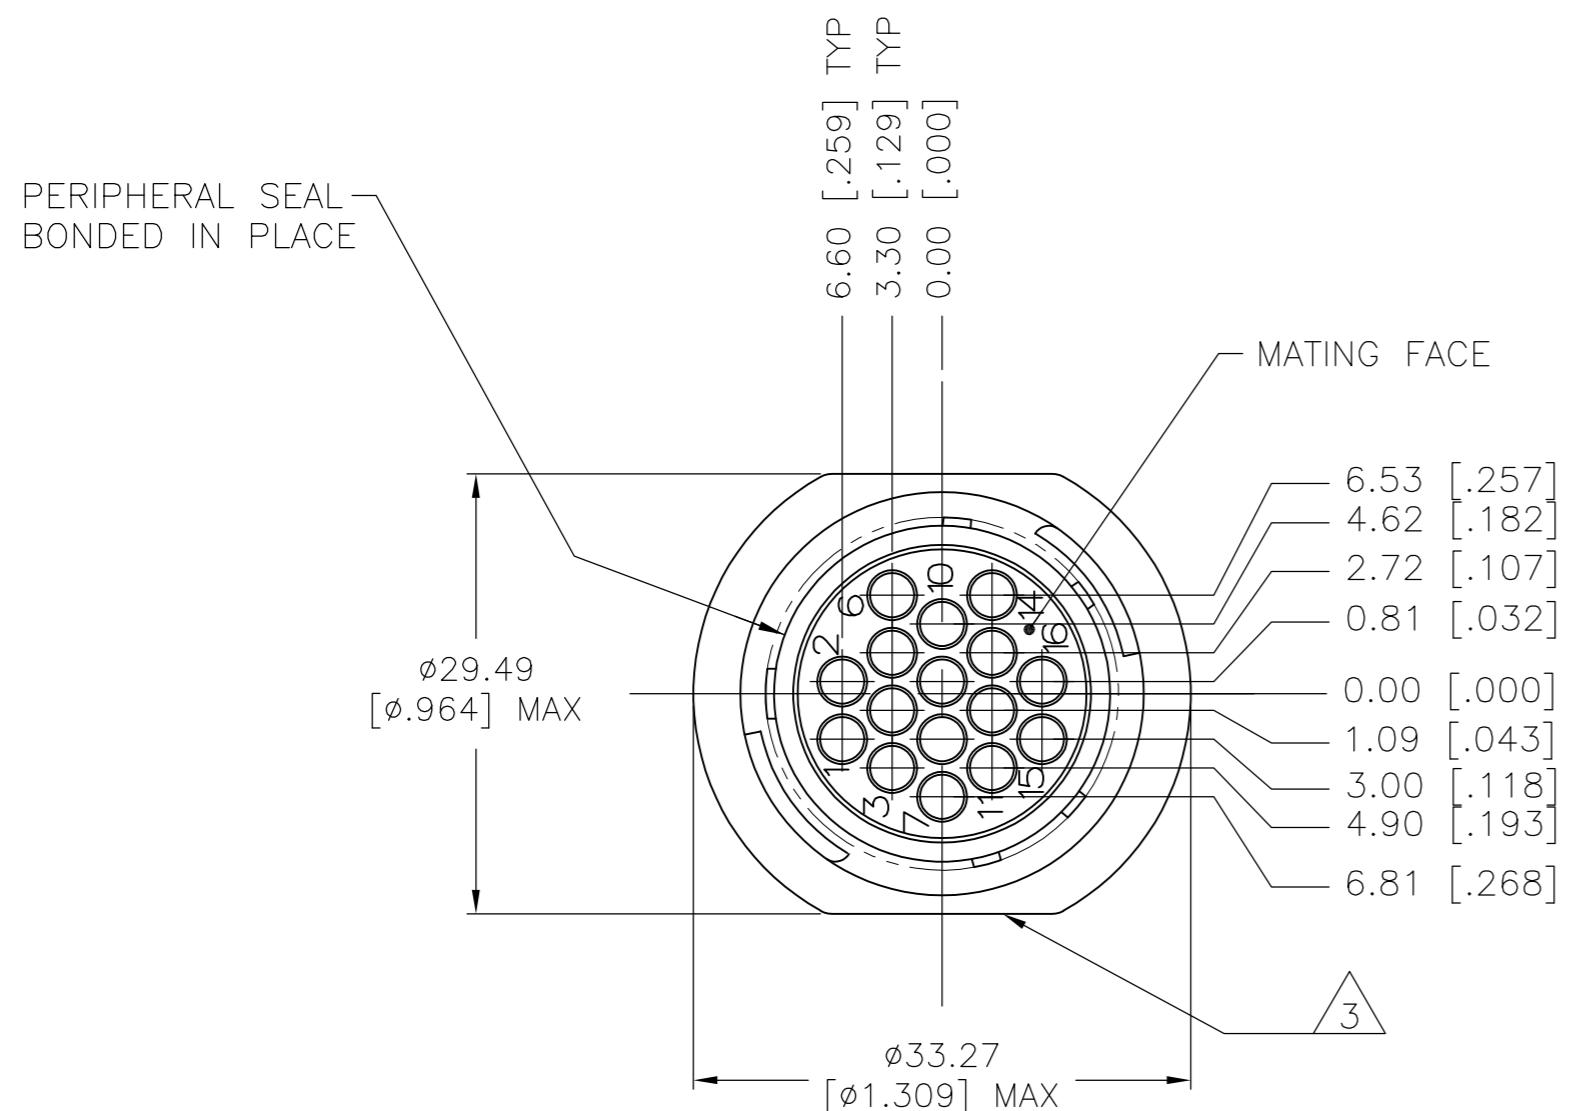

OBSOLETE	.040	.080	SMALL	796276-3
	.040	—	.080	SMALL
	.065	—	.100	STANDARD
WIRE INSULATION DIAMETER RANGE				INSULATION PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN	27-JAN-2000	TE Connectivity
	L. McEACHIN	27-JAN-2000	
	CHK. K. DOWHOWER	27-JAN-2000	
	APVD K. DOWHOWER	27-JAN-2000	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
0 PLC	±	—	NAME
1 PLC	±	—	ASSEMBLY, RECEPTACLE, STANDARD SEX, 17-16,
2 PLC	±	—	STANDARD OR SMALL INSULATION DIA., SEALED
3 PLC	±	—	
4 PLC	±	—	
ANGLES	±	—	
MATERIAL	FINISH	—	SIZE CAGE CODE DRAWING NO
			A2 00779 C-796276
		WEIGHT	RESTRICTED TO
			—
		CUSTOMER DRAWING	SCALE 2:1
			1 OF 1
			REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[796276-2](#)