

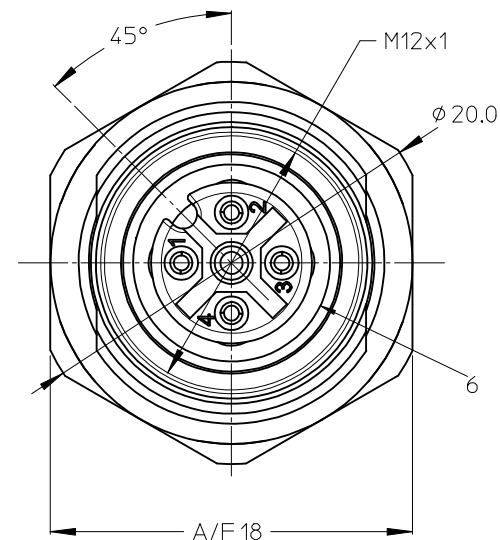
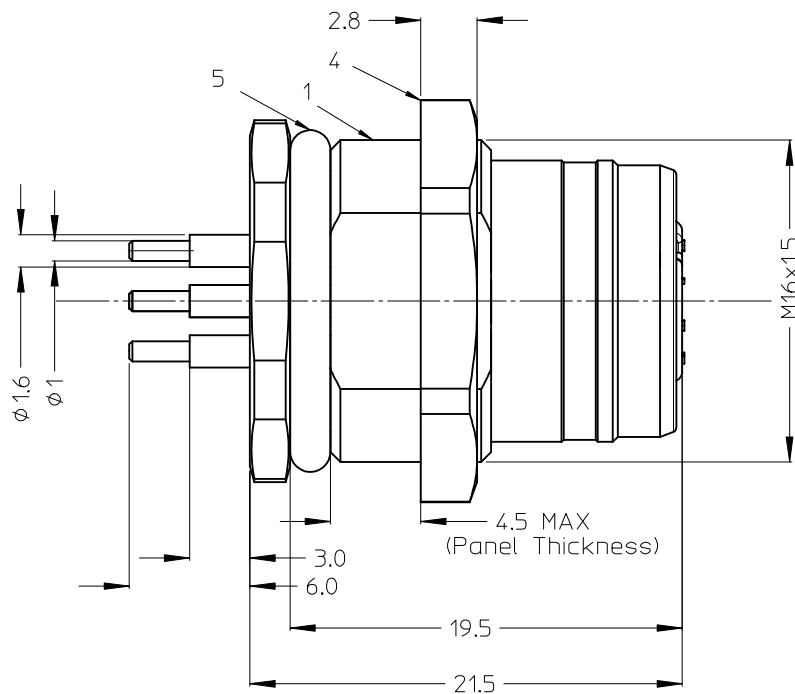
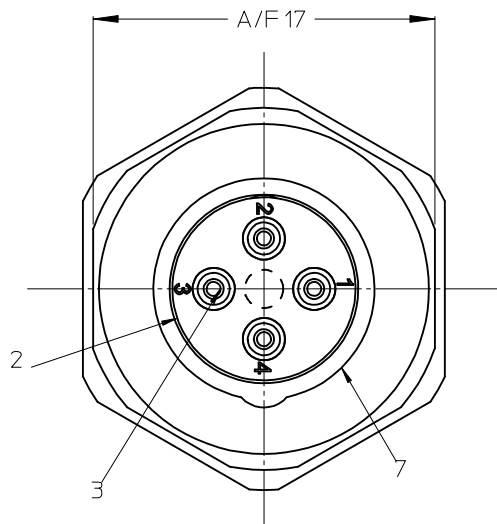


10 9 8 7 6 5 4 3 2 1



ITEM	COMPONENT	MATERIAL	FINISH
1	REC SHELL	BRASS	NICKEL PLATED
2	INSERT	PUR	BLACK
3	CONTACT	BRASS / GOLD	CuZn Ni/ Au
4	M16 NUT	BRASS	NICKEL PLATED
5	O-RING	NBR	BLACK
6	O-RING	VITON	RED
7	POTTING MATERIAL	EPOXY	NONE



POL	MATERIAL NO.	ENGINEERING NO.
4	1200845130	WR4U40001
5	1200845133	WR5U40001

VOLTAGE RATING	250V
AMPERAGE RATING	4A
PROTECTION CLASS	IP 67/68/69K
OPERATING TEMPERATURE	-25°C / +90 °C
UL CERTIFICATION	FILE NO. E152210
CSA CERTIFICATION	FILE NO. LR6837

ENTER DESCRIPTION EC NO: IPG2013-0800 2012/11/28 DRWN:BBRAUCH CHKD:APOHL 2012/12/12 APPR:CBURGER 2012/12/13			DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
					mm	INCH	DRAWN BY APOHL_WEU	DATE 2010/01/29	TITLE RECEPTACLE FEMALE M12-4P ULTRA LOCK, BLACK, M16		
A	REV	4 PLACES	± ---	± ---	CHECKED BY	DATE	DOCUMENT NO. molex SD-120084-011				SHEET NO. 1 OF 1
		3 PLACES	± ---	± ---	APOHL	2012/12/12					
		2 PLACES	± 0.05	± ---	APPROVED BY	DATE					
		1 PLACE	± 0.3	± ---	FPACHER	2010/02/01					
		0 PLACE	± 0.5	± ---	MATERIAL NO.						
				ANGULAR ± 1 °		SEE TABLE					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A 3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

9 8 7 6 5 4 3 2 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

1200845133