


WG NO. 603225

UNIT OF MEASURE	A	B	C	D	E	L	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.393	.501	.299	.325	.063	8.93	2.0	120 lbs.
MM	9.98	12.72	7.59	8.26	1.60	226.	50.8	54.43 kg.

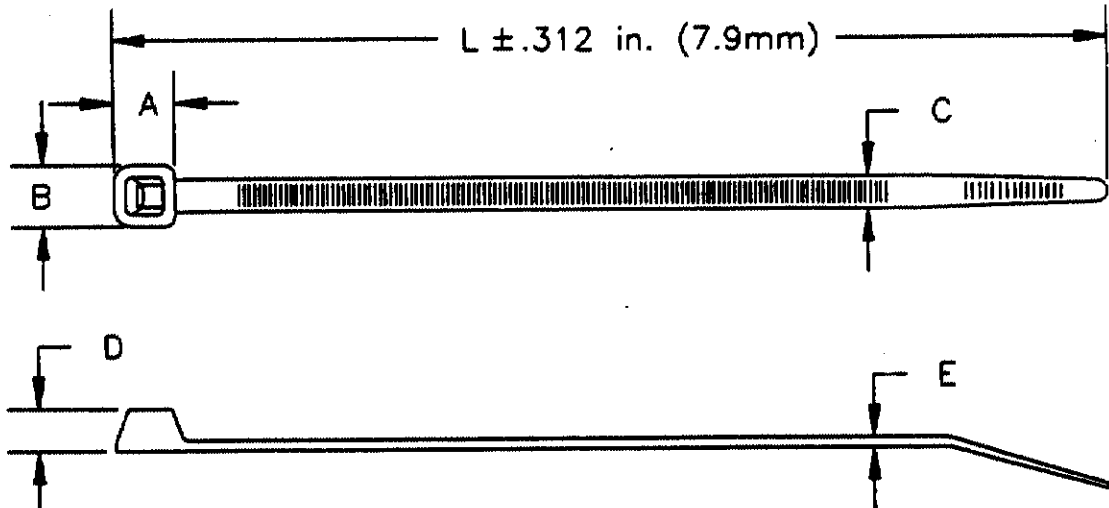

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
 2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.
- ⚠ OBSOLETE
 ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

APC ENGINEERING

JUL 13 1990

ISSUED BY *Allen*

CUSTOMER DRAWING UNPUBLISHED

	3-603225-9	NATURAL 500 TY2HL	
	3-603225-0 ⚠	BLACK 500 TY2HLB	
	4-603225-9 ⚠	NATURAL 50 TY2HD	
	4-603225-0	BLACK 50 TY2HDB	

LOC	0	DWG SIZE		PART No.		DESCRIPTION	ITEM NO
DIST	1	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)					
QTY. REQ'D. PER ASSY.		PARTS LIST					
				MATERIAL	HEAT TREAT	FINISH	
				NYLON 6/6			
				DIMENSIONS ARE IN INCHES	DRAWN BY:	DATE:	APPROVED BY:
				TOLERANCES UNLESS OTHERWISE SPECIFIED:	AD-TEK/VL	6/25/90	
				2 PL DEC ±	CHECK BY:	RELEASE:	
				3 PL DEC ± .039	BJM 6/90	J. Hamed 6/90	
				4 PL DEC ±	AMP AMP INCORPORATED		
				ANGLES ±	Harrisburg, Pa.		
				SLURF TEXTURE: J	NAME: HEAVY DUTY		
				REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.	CABLE TIE 8-7/8 INCH		
	B1	REVISED PER ECO-09-026444	AEG	28NOV 89	SCALE:	DRAWING No.:	SHEET :
	✓ B	ECN 062890	Jar	6/90	A	603225	1 OF 1
P	F	LTR	APC	DATE			REV.:
		REVISION RECORD					B1

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-603225-0](#)