
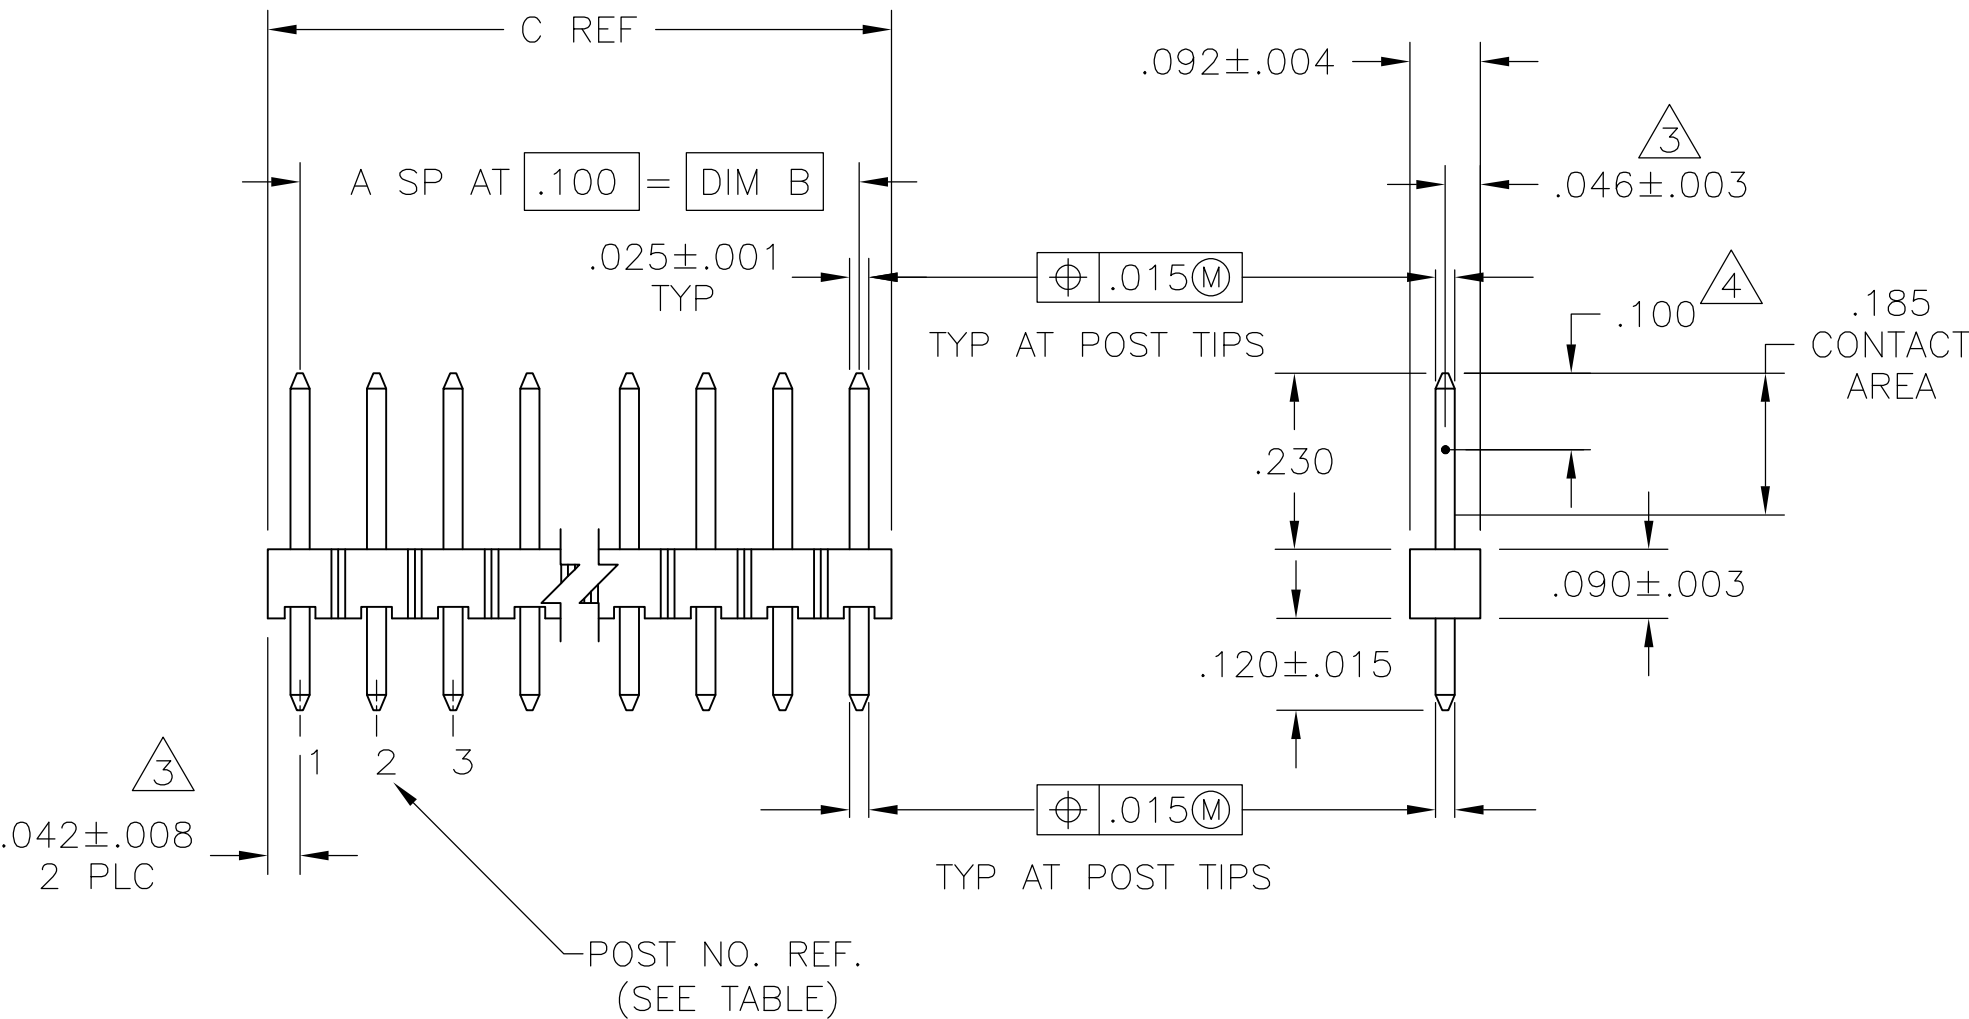




RECOMMENDED HOLE LAYOUT

- 1
- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4
- POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5
- PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6
- MATERIAL: HOUSING- FLAME RETARDANT THERMOPLASTIC. COLOR- BLACK. POSTS- COPPER ALLOY.
- 7
- FINISH: .000015 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER NICKEL.
- 8
- FINISH: .000015 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER NICKEL.
- 9
- HIGH TEMPERATURE CONFIGURATION
- 10
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SEE SHEET 2 FOR PART NUMBER TABLES

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 26JAN01	TE Connectivity			
DIMENSIONS: INCHES		CHK J GESFORD 29JAN01				
		APVD J GESFORD 29JAN01				
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J GESFORD 29JAN01	NAME			
0 PLC ± -		PRODUCT SPEC	HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL, VERTICAL WITH .025 SQUARE POSTS			
1 PLC ± -		APPLICATION SPEC				
2 PLC ± -		—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3 PLC ± .005		—	A2	00779	C-104878	—
4 PLC ± -		—	CUSTOMER DRAWING			
ANGLES ± -		WEIGHT	SCALE	SHEET	REV	
FINISH		—	4:1	1 OF 2	W	
SEE TABLE						

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

OBSOLETE			10,20,23	2.584	2.500	25	23	26	7-104878-5
			1	.584	.500	5	5	6	7-104878-4
			5	.784	.700	7	7	8	7-104878-3
OBSOLETE			2	.584	.500	5	5	6	7-104878-1
			3,5	.584	.500	5	4	6	7-104878-0
OBSOLETE			3,8,9,12,13,15,16,19	2.284	2.200	22	15	23	6-104878-8
			3,8,9,12,13,15,16,19,20	2.084	2.000	20	12	21	6-104878-7
OBSOLETE			3,8,9,10,12	1.684	1.600	16	12	17	6-104878-5
			2,8,9,12	1.584	1.200	15	12	16	6-104878-4
			4,6,7,9	1.184	1.100	11	8	12	6-104878-3
OBSOLETE			4,6,7	.884	.800	8	6	9	6-104878-0
			2	.684	.600	6	6	7	5-104878-9
			3	.684	.600	6	6	7	5-104878-8
			3,4	.484	.400	4	3	5	5-104878-7
OBSOLETE									
OBSOLETE			2	.384	.300	3	3	4	5-104878-3
			2	.484	.400	4	4	5	5-104878-2
REMARKS		PLATING	POST NUMBER OMITTED	C	B	A	NO OF ACTIVE POSN	NO OF POSN	PART NUMBER

OBSOLETE			2	.284	.200	2	2	3	2-104878-7
			2,4,6,8,10,12,14	1.484	1.400	14	8	15	2-104878-6
			10,20,23	2.584	2.500	25	23	26	2-104878-5
			1	.584	.500	5	5	6	2-104878-4
OBSOLETE			5	.784	.700	7	7	8	2-104878-3
			2	.884	.800	8	8	9	2-104878-2
			2	.584	.500	5	5	6	2-104878-1
			3,5	.584	.500	5	4	6	2-104878-0
OBSOLETE			3,4	.684	.600	6	5	7	1-104878-9
			3,8,9,12,13,15,16,19	2.284	2.200	22	15	23	1-104878-8
			3,8,9,12,13,15,16,19,20	2.084	2.000	20	12	21	1-104878-7
			4,6,7,11,13,14,16	1.884	1.800	18	12	19	1-104878-6
OBSOLETE			3,8,9,10,12	1.684	1.600	16	12	17	1-104878-5
			2,8,9,12	1.584	1.200	15	12	16	1-104878-4
			4,6,7,9	1.184	1.100	11	8	12	1-104878-3
			2,6,7,11	1.184	1.100	11	8	12	1-104878-2
OBSOLETE			5	.884	.800	8	8	9	1-104878-1
			4,6,7	.884	.800	8	6	9	1-104878-0
			2	.684	.600	6	6	7	104878-9
			3	.684	.600	6	6	7	104878-8
OBSOLETE			3,4	.484	.400	4	3	5	104878-7
			8	.984	.900	9	9	10	104878-6
			3,6,12,17	1.884	1.800	18	15	19	104878-5
			3,6,9	1.284	1.200	12	10	13	104878-4
OBSOLETE			2	.384	.300	3	3	4	104878-3
			2	.484	.400	4	4	5	104878-2
			3	.584	.500	5	5	6	104878-1
REMARKS		PLATING	POST NUMBER OMITTED	C	B	A	NO OF ACTIVE POSN	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -
FINISH

DWN
R BROWN
26JAN01

CHK
J GESFORD
29JAN01

APVD
J GESFORD
29JAN01

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

TE Connectivity

NAME
HEADER ASSY, MOD II, BREAKAWAY,
SINGLE ROW, .100 CL, VERTICAL
WITH .025 SQUARE POSTS

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=104878

RESTRICTED TO
—

SCALE
4:1

SHEET
2 of 2

REV
W

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-104878-8](#)