

THIS DOCUMENT CONTAINS PROPRIETARY DATA
OF POLARIS INDUSTRIAL ENTERPRISES INC. NO
DISCLOSURE, REPRODUCTION, OR USE OF ANY
PART THERE OF MAY BE MADE EXCEPT BY
WRITTEN PERMISSION.

REV.	BY	DATE	APPRVL.	P/N	SW22E
E	DM	7/25/96	BT	ADDED 20K SPECS TO VALUES CHART	

SPECIFICATIONS

RESISTANCE RANGE ----- 50 OHMS TO 20K OHMS
RESISTANCE TOLERANCE ----- $\pm 3\%$
INDEPENDENT, LINEARITY ----- $\pm 0.5\%$
POWER RATING ----- 0.5 WATTS
ELECTRICAL NOISE ----- 100 OHM MAX.
ELECTRICAL ANGLE ----- $320 \pm 5^\circ$
MECHANICAL ANGLE ----- $320 \pm 5^\circ$
STOP STRENGTH ----- 84 OZ.IN.MIN.
END RESISTANCE ----- 2% OR 1 OHM MAXIMUM
RESOLUTION ----- SEE CHART
INSULATION RESISTANCE ----- 1000 MEGOHMS AT 1000 VDC MIN.
DIELECTRIC STRENGTH ----- 1000 VAC
STARTING TORQUE ----- 0.8 OZ.IN.MAX.
TEMPERATURE COEFFICIENT ----- SEE CHART
WEIGHT ----- APPROX. 0.7 OZ.
OPERATING TEMPERATURE ----- -55°C TO $+105^\circ\text{C}$
ROTATIONAL LIFE ----- 500,000 SHAFT REVOLUTIONS

MATERIALS

HOUSING----- HIGH TEMP. THERMO PLASTIC
TERMINALS----- GOLD PLATED BRASS
BUSHING----- BRASS
SHAFT ----- STAINLESS STEEL
RESISTIVE ELEMENT----- WIREWOUND

NON-STANDARDS AVAILABLE

MULT-GANGED UP TO 6 SECTIONS
REAR SHAFT EXTENSION
FRONT SHAFT MODIFICATIONS
CENTER TAP
SPECIAL ELECTRICAL AND MECHANICAL ANGLES

STANDARD RESISTANCE VALUES CHART

RESISTANCE (OHMS)	50	100	200	500	1K	2K	5K	10K	20K
RESOLUTION	.33	.27	.21	.22	.17	.13	.10	.08	.06
TEMPERATURE									
COEFFICIENT PPM/ $^\circ\text{C}$	80	80	80	20	20	20	20	20	20

TOLERANCES

XX = $\pm .010^\circ$ FRACT. = $\pm .1/64^\circ$
XXX = $\pm .005^\circ$ ANGLES = $\pm .1/2^\circ$
ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SCALE	DATE:	8/4/86
NONE	BY	BT
	APPR'D	BT
CODE	IDENT:	19477





ETI SYSTEMS
CARLSBAD
CALIFORNIA

TITLE
SINGLE TURN
POTENTIOMETER

PART NO.

SW22E

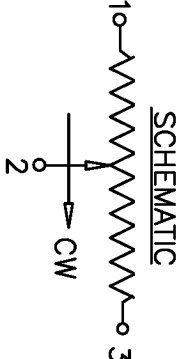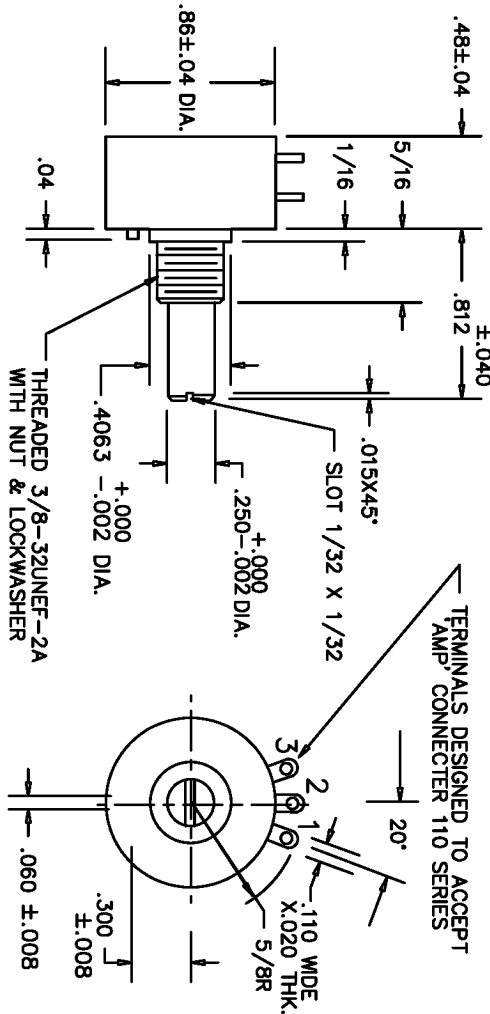

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ETI Systems:](#)

[SW22E-100](#) [SW22E-10K](#) [SW22E-1K](#) [SW22E-2K](#) [SW22E-5K](#)