




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AI			C	ECR-15-007656	06JUN2015	GSK	JB

PN 0-1 As Shown


Contact arrangement
view from connecting side

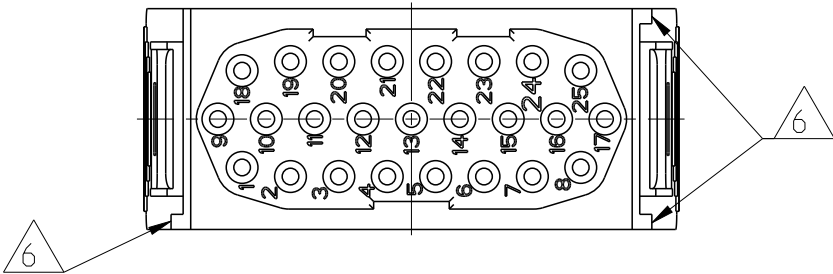

Lateral Print

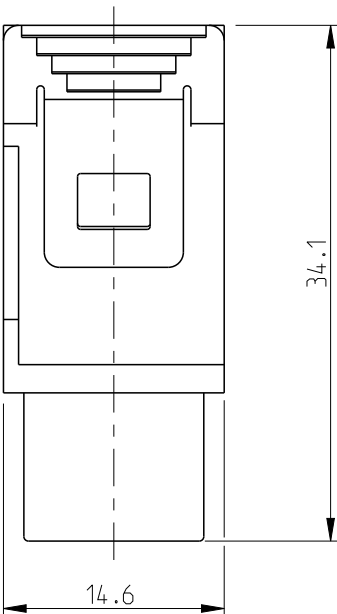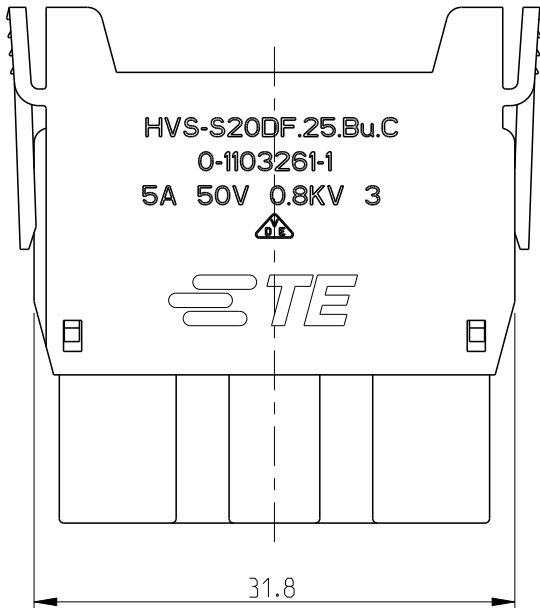


Contact arrangement
view from termination side

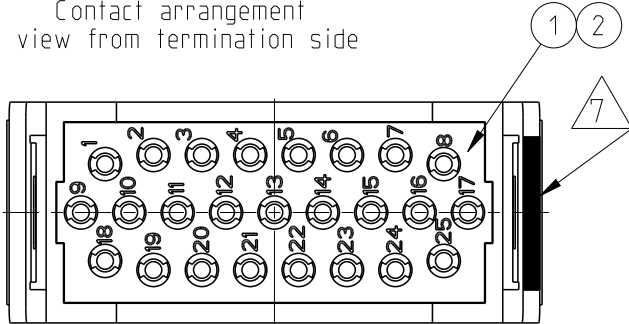

NOTES






- 1
- SUITABLE CRIMP CONTACTS: SERIES S20DF
CATALOG: 889745
OUTER DIMENSIONS OF INSULATION: MAX. Ø1.6mm
- 2
- SUITABLE MODULE FIXING FRAME: SERIES HVS SIZE 3 TO 8
CUSTOMER DRAWING: 1103250
- 3
- SUITABLE INSERTION TOOL:
CUSTOMER DRAWING: 1102855
- 4
- SUITABLE EXTRACTION TOOL:
CUSTOMER DRAWING: 1102855
- 5
- STANDARDS:
DIN EN 61984; DIN EN 60664-1
- 6
- POLARIZATION RIPS
- 7
- MARKING OF POLARIZATION ACCORDING TO MARKING OF
MODULE FRAME
- 8
- PACKAGING:
10 SETS IN A CARTON, PRE-MOUNTED

PN 0-1 As Shown



SCALE 1:1

QTY.	DESCRIPTION	MATERIAL	COLOR	NOTE	ITEM
1	FEMALE INSERT	PBT-GF10	LIGHT GREY	HVS-S20DF.25.BU.C	2
1	CONTACT INSERT	PBT-GF15	LIGHT GREY	HVS-S20DF.25	1
HVS-S20DF.25.BU.C					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SCHEIDER 20.02.2006		 TE Connectivity		
		CHK A.GAST 20.02.2006				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ISO 8075 DIN ISO 2768 mH-E DIN 16901-120		NAME FEMALE INSERT ASSY HVS-S20DF-25.BU.C		
		<div>0 PLC ±</div> <div>1 PLC ±</div> <div>2 PLC ±</div> <div>3 PLC ±</div> <div>4 PLC ±</div> <div>ANGLES ±</div>				
MATERIAL		FINISH		SIZE		RESTRICTED TO
				CAGE CODE		
				DRAWING NO		
				A 3 00779		
				C-1103261		
CUSTOMER DRAWING				SCALE		
				2:1		
				SHEET		
				1 OF 1		
				REV		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1103261-1](#)