

HALF SIZE DIP LOW VOLTAGE 5.0V CRYSTAL CLOCK OSCILLATOR

ACH Series



ESD Sensitive



RoHS/RoHS II Compliant



12.7 x 12.7 x 5.6mm

Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable

FEATURES:

- Wide frequency range.
- HCMOS and TTL compatible.
- Tight symmetry option.
- Tri-state Enable / Disable function.

APPLICATIONS:

- Microprocessors.
- Digital circuit.

STANDARD SPECIFICATIONS:


Parameters		Minimum	Typical	Maximum	Units	Notes
Frequency Range		0.032768		200.000	MHz	
Operating Temperature		0		+70	°C	See options
Storage Temperature		-55		+125	°C	
Overall Frequency Stability		-100		+100	ppm	See options
Supply Voltage (Vdd)		4.5	5.0	5.5	V	
Input Current	32.768kHz ~ 23.999MHz			30	mA	
	24.000MHz ~ 49.999MHz			45		
	50.000MHz ~ 79.999MHz			70		
	80.000MHz ~ 200.999MHz			85		
Symmetry (@ 1/2Vdd)	32.768kHz ~ 49.999MHz	45		55	%	See options
	50.000MHz ~ 200.000MHz	40		60		
Rise and Fall Time (Tr/Tf)	32.768kHz ~ 1.999MHz			40	ns	
	2.000MHz ~ 24.000MHz			10		
	24.001MHz ~ 200.000MHz			5		
Output Load	32.768kHz ~ 79.999MHz			15	pF	See options
				10	TTL	
	15			pF		
	5			TTL		
Output Voltage		VOH	0.9*Vdd		V	
		VOL		0.1*Vdd	V	
Tri-state Function		VIH	2.2		V	"1" or Open: Oscillation
		VIL			0.8	V
Output Enable time				4	ms	For option A only
Output Disable time				100	ns	For option A only
Start-up Time			1	10	ms	

* Overall frequency stability includes initial tolerance and temperature stability.

12.7 x 12.7 x 5.6mm

 **RoHS/RoHS II Compliant**

(Left blank if standard)

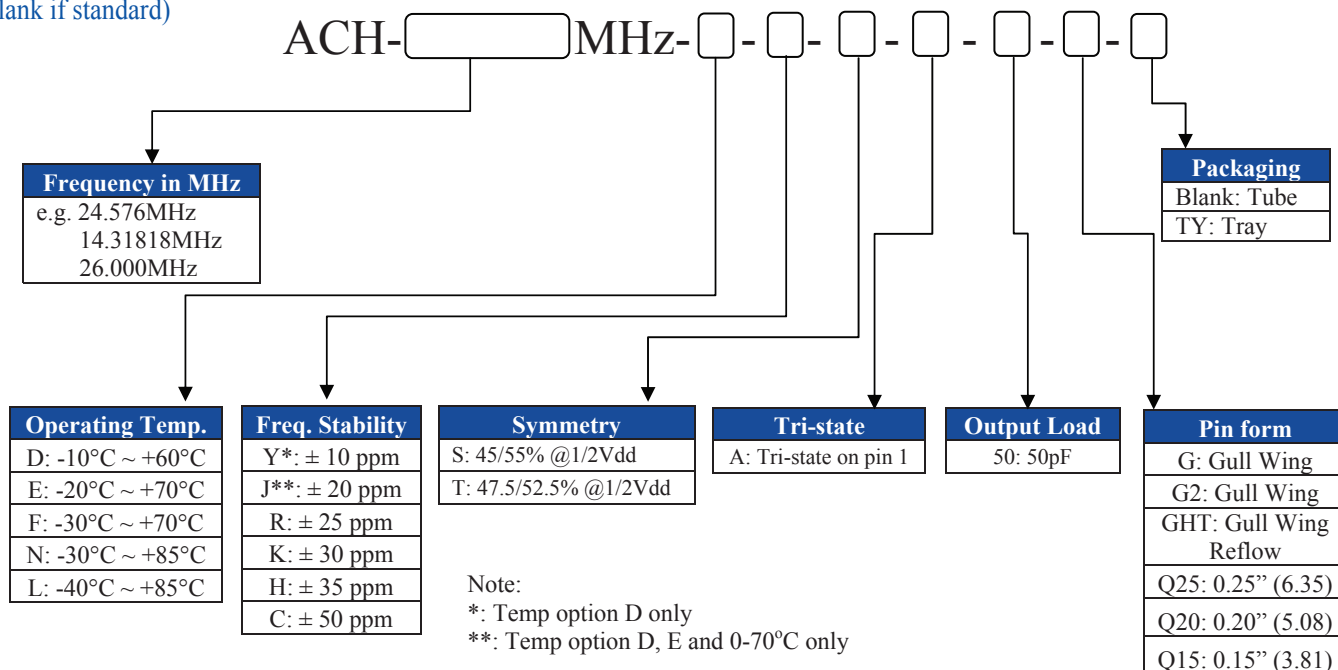

Pin	Function
1	Tri-State/NC
4	Case GND
5	Output
8	Vdd

Dimensions: inches (mm)

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[ACH-48.000MHZ-EK](#) [ACH-40.000MHZ-EK](#) [ACH-12.000MHZ-EK](#) [ACH-4.000MHZ-EK](#) [ACH-50.000MHZ-EK](#) [ACH-27.000MHZ-EK](#) [ACH-14.31818MHZ-EK](#) [ACH-16.000MHZ-EK](#) [ACH-25.000MHZ-EK](#) [ACH-24.576MHZ-EK](#) [ACH-10.000MHZ-EK](#) [ACH-18.432MHZ-EK](#) [ACH-20.000MHZ-EK](#) [ACH-32.000MHZ-EK](#) [ACH-32.768MHZ-EK](#) [ACH-8.000MHZ-EK](#) [ACH-3.6864MHZ-EK](#) [ACH-11.0592MHZ-EK](#) [ACH-2.5600MHZ-L-A](#)