


NUMBER C-179182
 METRIC
 三角標(3rd ANGLE PROJECTION)

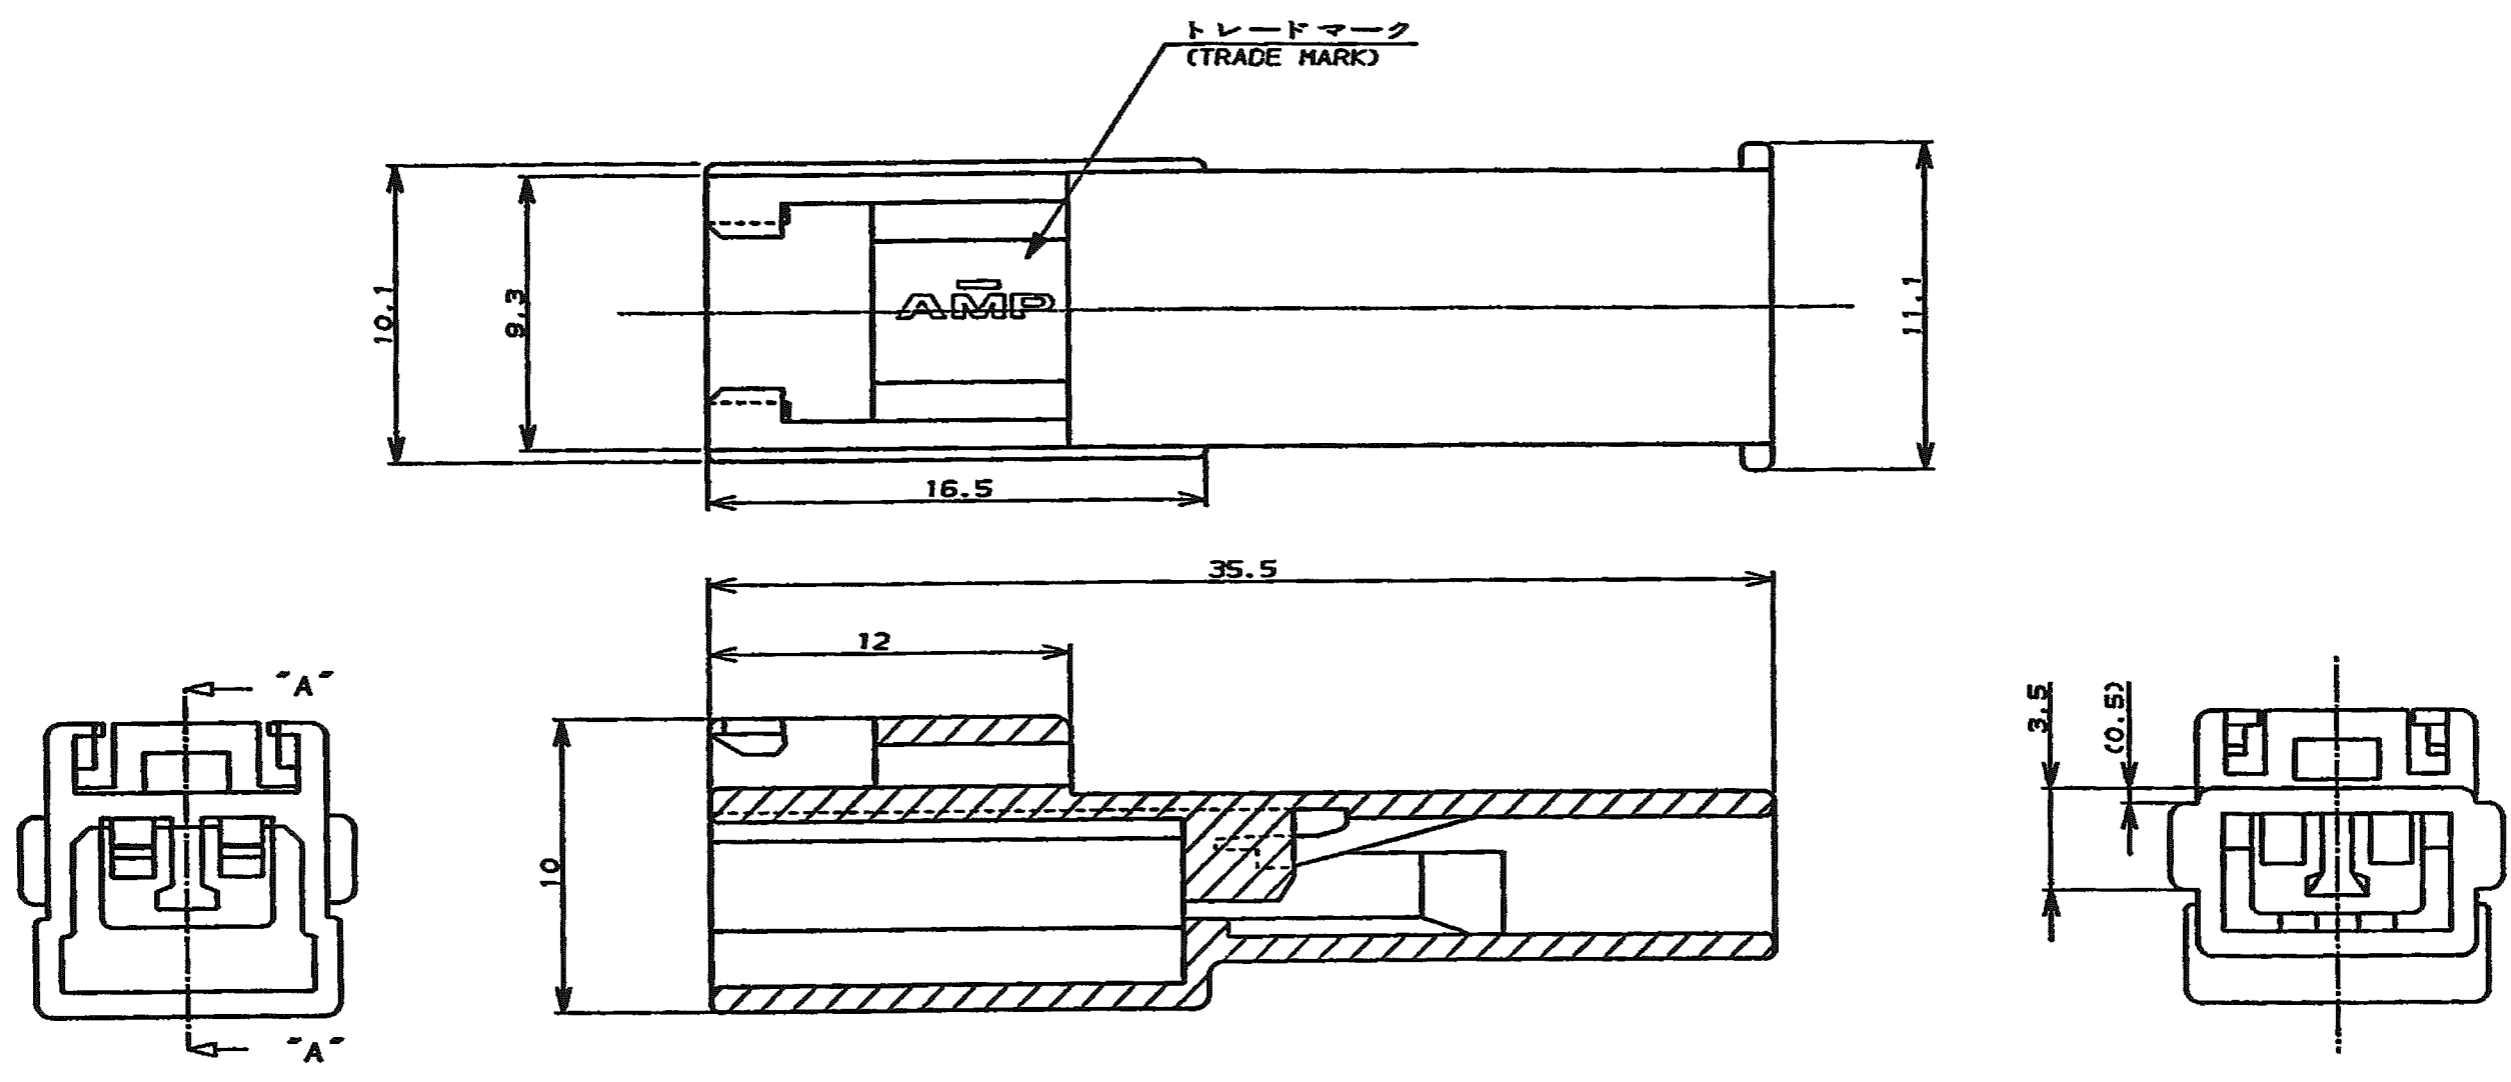

断面 "A"- "A"
 (SECT)

注記;

- 1. 通用コンタクト型番
175179-X
- 2. かん合相手リセハウジング型番
179183-X

NOTES;

- 1. APPLICABLE CONTACT P/N
175179-X
- 2. MATING REC HOUSING P/N
179183-X

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| | |
|---------------|----------|
| (RED) 赤 | 179182-7 |
| (BLACK) 黒 | 179182-9 |
| (BLUE) 青 | 179182-6 |
| (NATURAL) 自然色 | 179182-1 |
| (COLOR) 色 | (P/N) 型番 |

△ OBSOLETE

| | | | | | | | |
|-----|----------------------------|-----|-----|---|--------------------------|--|--|
| | | | | tyco Electronics | | Tyco Electronics AMP K.K. Kawasaki, Japan | |
| | | | | 名称 (NAME) 187 シリーズ ポジティブロック タブハウジング インナーロック | | | |
| | | | | 187 SERIES POSITIVE LOCK TAB HOUSING INNER LOCK | | | |
| | | | | 一般公差 (GENERAL TOLERANCES) | | LOC 番号 (No.) | |
| | | | | 100μT ±0.2 | | B J C-179182 | |
| | | | | 100μM, 300μT ±0.25 | | 尺度 (SCALE) | |
| | | | | 300μM, 1000μT ±0.3 | | REV. C1 | |
| | | | | 角 度 ±3° | | SHEET 1 OF 1 | |
| C1 | REVISD PER ECO-10-000444 | KK | AEG | 09JAN 10 | 検査電線断面積 (WIRE AREA) | 検査外径 (INSULATION DIA.) | |
| C | 変更 (REVISED) FJD0-0269-03 | T.H | M.S | 22AUG 03 | mm ² (AWG -) | mmφ | |
| B | 変更 (REVISED) FJ00-0018-94 | N.Y | Y.K | 22AUG 03 | 材料 (MATERIAL) | 仕上 (FINISH) | |
| A | 変更 (REVISED) FJ00-0848-93 | N.Y | Y.K | 8 OCT '93 | (66 NYLON 94V-0) | --- | |
| O | 作成 (RELEASED) FJ00-0848-93 | N.Y | Y.K | 8 OCT '93 | 66ナイロン 94V-0 | | |
| LTR | 変更 (REVISION RECORD) | DR | CHK | DATE | DR. N. YAMASAKI | DE. Y. KASHIWA | |
| | | | | | 8 OCT '93 | 8 OCT '93 | |
| | | | | | CHK. M. SHINDO | APP. // | |

(CUSTOMER DRAWING)

PRINT DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[179182-1](#)