

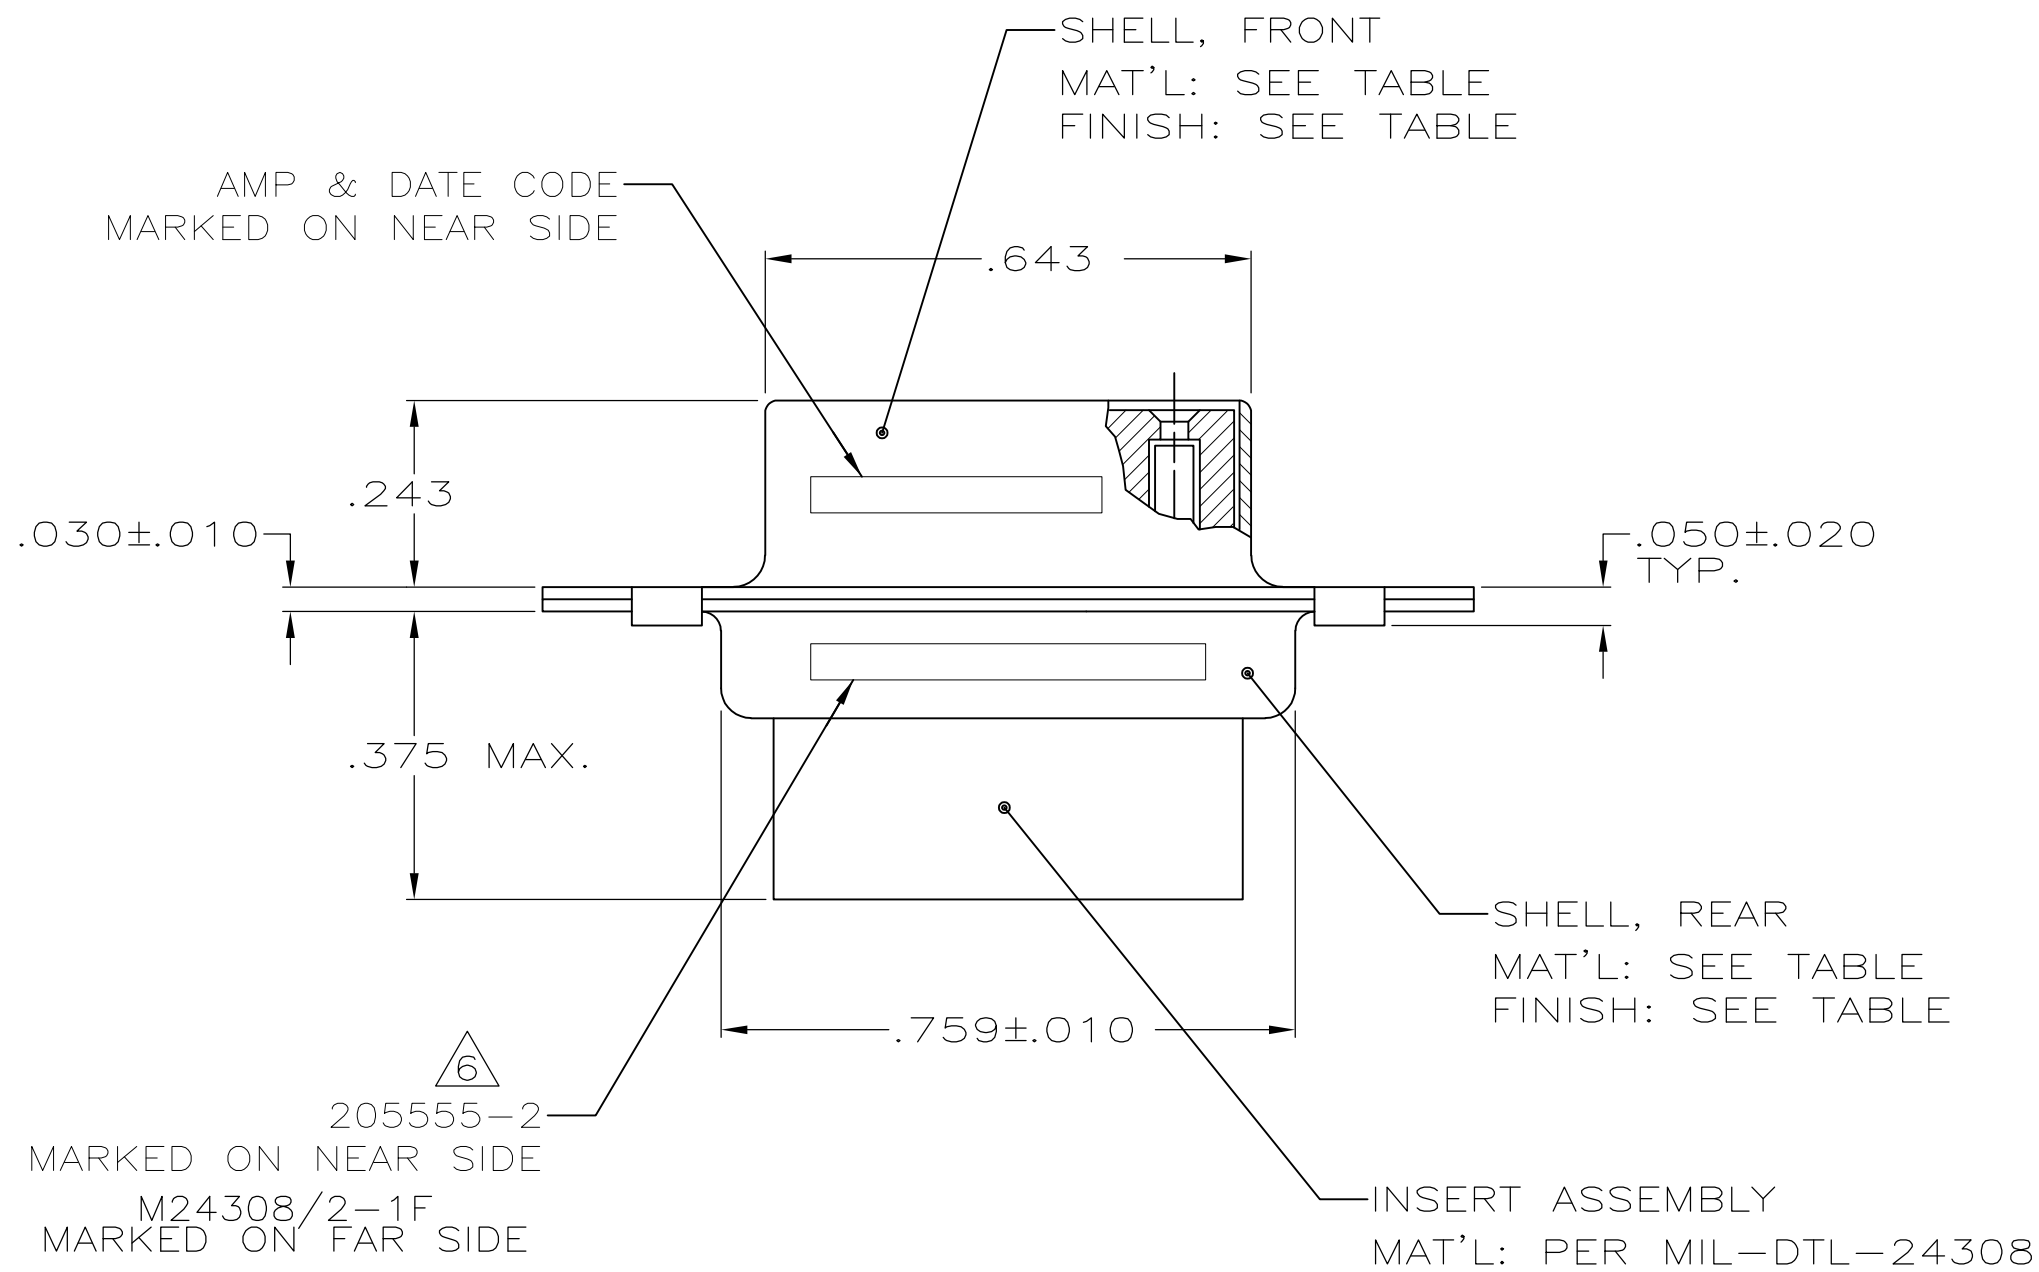


| LOC | DIST | REVISIONS |     |                           |         |     |      |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
|     |      | P         | LTR | DESCRIPTION               | DATE    | DWN | APVD |
| —   | —    |           | P3  | REVISED PER ECO-15-016062 | 10NOV15 | KG  | CD   |

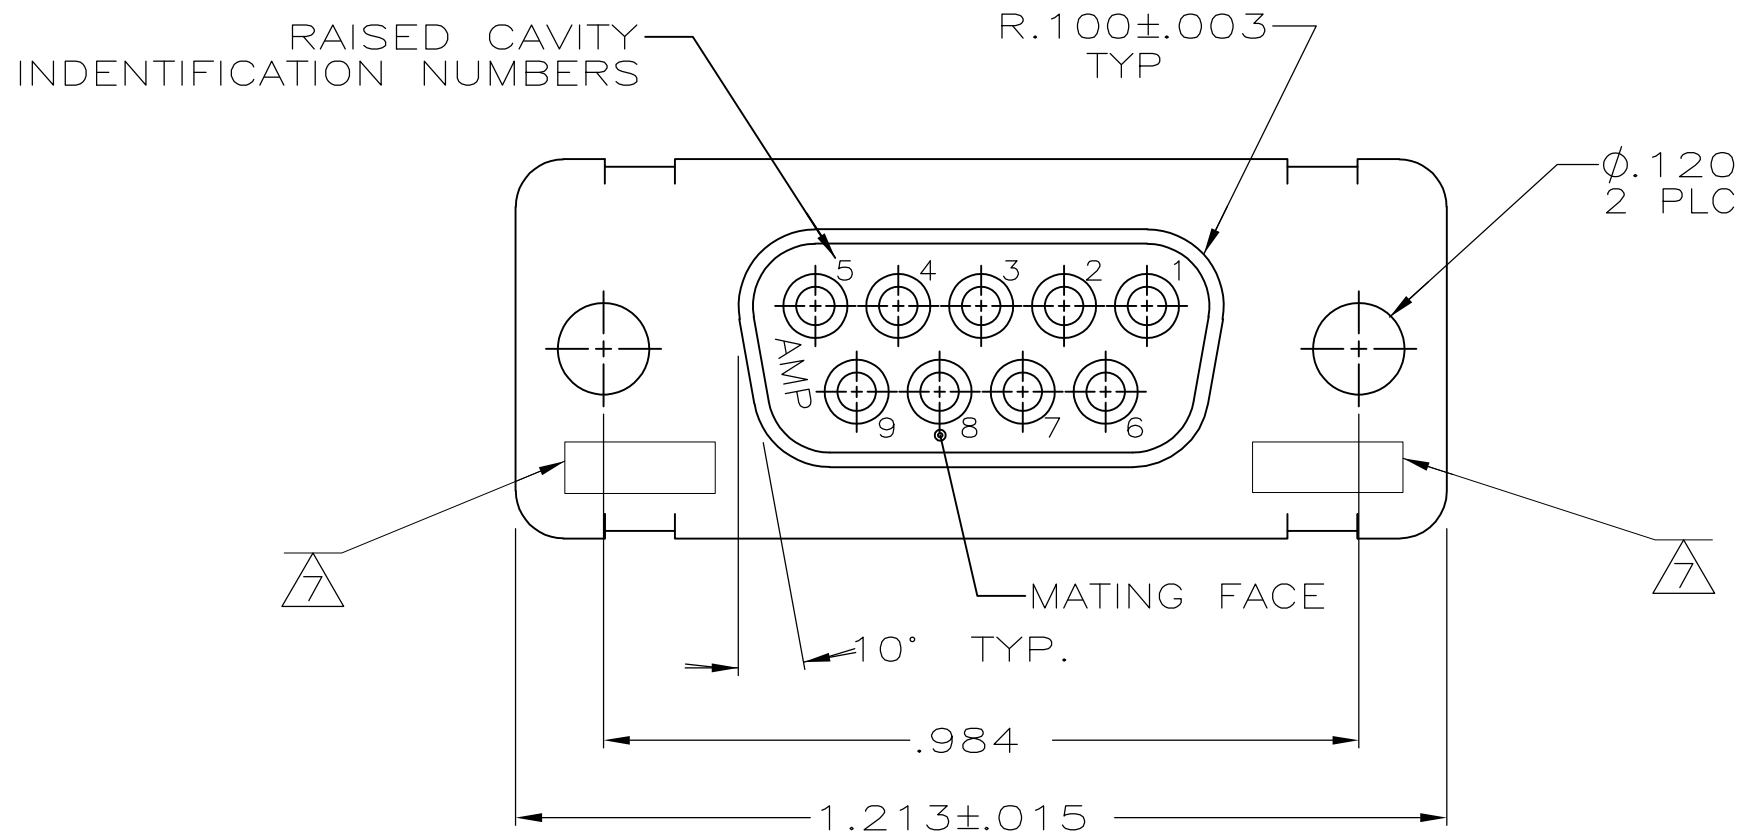

1. THIS RCPT. IS DESIGNED TO CONFORM TO THE LATEST ISSUE OF MIL-C-24308
  2. MAX WIRE INSUL TO BE USED WITH THIS RCPT IS .068 DIA
  3. STAINLESS STEEL RETENTION CLIPS ARE INCLUDED IN INSERTS
  4. PACKAGE STAMPED M24308/2-281F
  5. THIS RCPT. WILL ACCEPT SIZE 20 SOCKET CONTACT M39029/63-368 OR ANY AMP HD-20 SOCKET CONTACT
- △6 AMP PART NO. STAMPED ON CONNECTOR REPRESENTS KIT NUMBER WITH CONTACTS
- △7 UL/CSA DESIGNATION STAMPED IN THIS AREA.
- △8 RESTRICTED ITAR DRAWING.
- △9 FINISH: PLATED BRIGHT TIN .000400 MIN THK PER ASTM-B-545 OVER COPPER PLATE .000050 MIN THK PER MIL-C-14550.

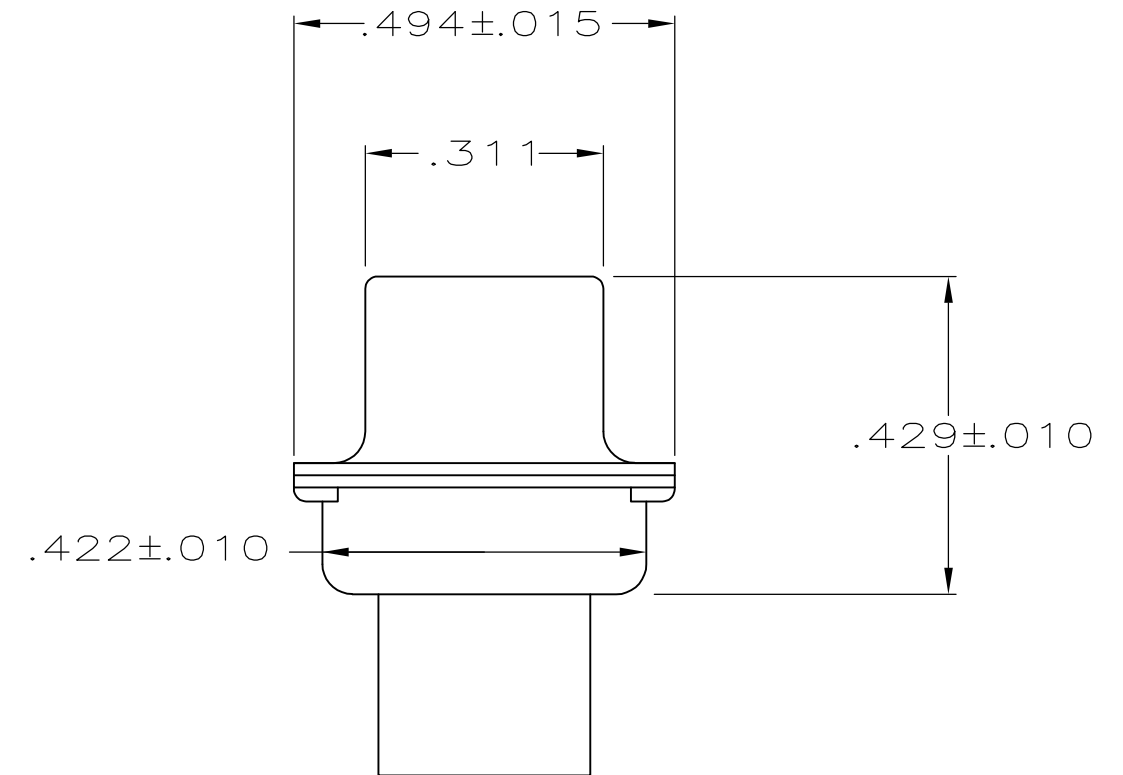

|                   |                      |                |             |
|-------------------|----------------------|----------------|-------------|
| SUPSC BY 205161-1 | △9                   | STEEL, CLASS G | 205161-5    |
|                   | -                    | -              | 205161-4    |
| SUPSD BY 207253-2 | CADMIUM PER QQ-P-416 | STEEL, CLASS G | 205161-3    |
|                   | CADMIUM PER QQ-P-416 | BRASS          | 205161-2    |
|                   | CADMIUM PER QQ-P-416 | STEEL, CLASS G | 205161-1    |
| SHELL FINISH      |                      | SHELL MATERIAL | PART NUMBER |

|                                        |  |                  |         |                                               |     |       |        |
|----------------------------------------|--|------------------|---------|-----------------------------------------------|-----|-------|--------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN              | 1-12-05 | TE Connectivity                               |     |       |        |
| DIMENSIONS: INCHES                     |  | CHK              | 1-12-05 |                                               |     |       |        |
|                                        |  | APVD             | 1-12-05 | NAME                                          |     |       |        |
|                                        |  | PRODUCT SPEC     |         |                                               |     |       |        |
| MATERIAL                               |  | APPLICATION SPEC |         | RCPT ASSY,AMPLIMITE, SIZE 1,9 POSN,SERIES 109 |     |       |        |
| SEE CALLOUTS                           |  | WEIGHT           | -       |                                               |     |       |        |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: |  | CUSTOMER DRAWING |         | SCALE                                         | 4:1 | SHEET | 1 of 1 |
| FINISH                                 |  |                  |         |                                               |     | REV   | P3     |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[205161-5](#)