

DESCRIPTION: 2mm CENTER RIGHT ANGLE HEADER





20 PIN SHOWN

ELECTRICAL:

CURRENT RATING: 1 AMPS
 INSULATOR RESISTANCE: 5,000 MegOhms Min.
 DIELECTRIC WITHSTANDING: 500V AC
 OPERATING TEMPERATURE: -40° ~ +105° C
 MAX. PROCESS TEMPERATURE: 260°C FOR 10SEC.

MATERIAL:

CONTACT: COPPER ALLOY
 INSULATION: NYLON-6T, UL 94V-0
 PLATING: GOLD FLASH ENTIRE CONTACT

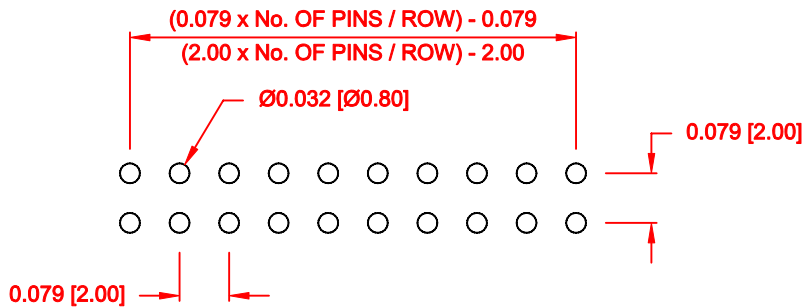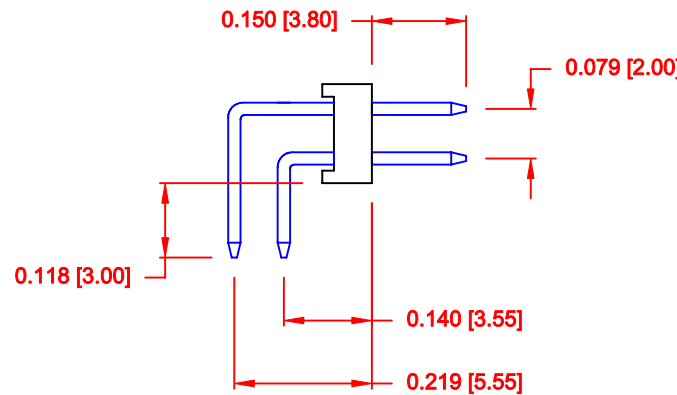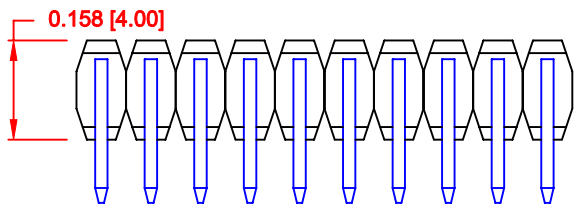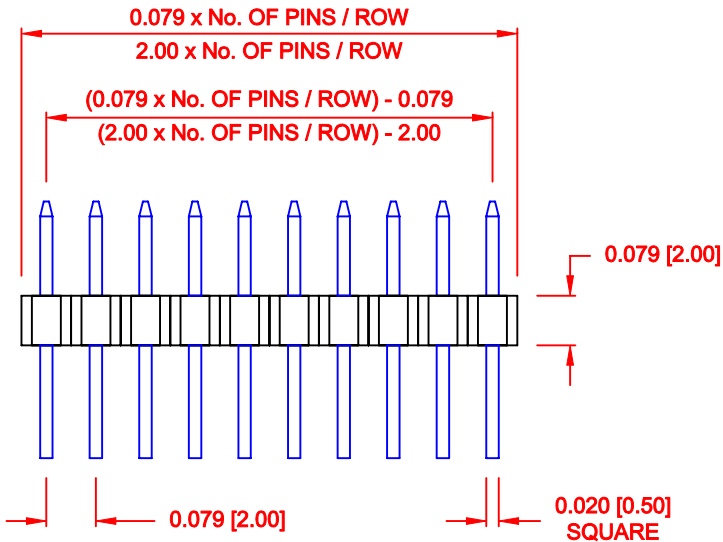

RECOMMENDED P.C. BOARD LAYOUT
 (ALL TOL. = 0.002)

2764 YY 02 R P2

SERIES _____
 2.00mm
 POSITIONS _____
 2 THRU 72
 IN INCREMENTS OF 2
 TERMINATION _____
 02 = RIGHT ANGLE
 RoHS COMPLIANT _____
 (HIGH TEMP. PROCESS)
 PACKAGING _____
 TAPE & REEL

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 07-16-08
			CHECKED:	DATE:
<h1>NorComp</h1>	SCALE: 3 : 1	SHEET 1	OF 1	REV 3
	DWG NO. 2764YY02RP2			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

[27640402RP2](#) [27640602RP2](#) [27640802RP2](#) [27641002RP2](#) [27641202RP2](#) [27641402RP2](#) [27641602RP2](#)
[27641802RP2](#) [27642002RP2](#) [27642202RP2](#) [27642402RP2](#) [27642802RP2](#) [27643002RP2](#) [27643202RP2](#)
[27644002RP2](#) [27644402RP2](#) [27646002RP2](#) [27646202RP2](#) [27647002RP2](#) [27647202RP2](#) [27645002RP2](#)