



**PERFORMANCE CHARACTERISTICS**

- CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE: 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE : 20 m Ω MAX
- INSERTION FORCE: 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN /CONT
- INSULATION RESISTANCE: 10<sup>4</sup> MΩ MIN

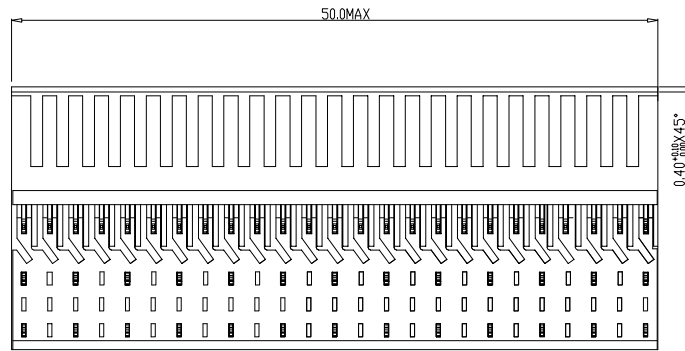

**NOTES**

1. LEAD FREE INDICATOR :LF=LEAD FREE
2. THIS PRODUCT IS CSA APPROVED.  
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

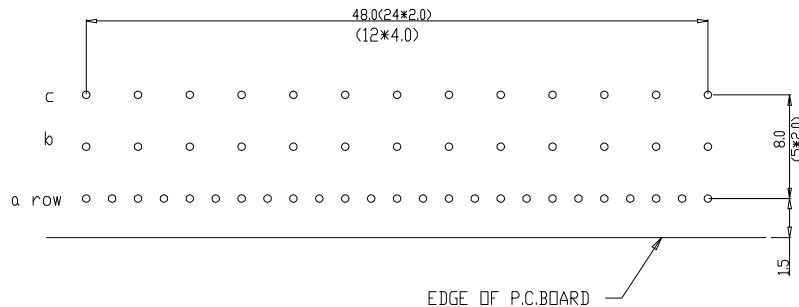

Material		Spec ref	
Mat code	Heatreat	✓	TOLERANCE
Plating/Finish	Dr		1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1°HÖEKEN
Dr	10 2 92	J.V.B	size
Eng			A1
Chr			Scale
Appr			5.000
Product family		Model Name	
Model Revision		REL Level	
MPACS 5+2R RA RCP CONN TYPE B		BS.C .202468.004	
Rev.	E		
06	BEC 9.3546	RM 11-06-01	CUSTOMER DRAWING

rev	ecn no	dr	date
A	CONVERSION REVISION 06	KN	14-9-01
B	105-0093	MINI	17-06-05
C	DG05-0278	keson	02-08-05
D	DG07-0362	keson	05/09/07
E	DG10-0110	NZ	05/30/10
-	-	-	-
06	BEC 9.3546	RM	11-06-01

This drawing is the property of FC. It is to be used only for the purpose intended. No part of this drawing may be reproduced without the written permission of FC. Copyright © FC.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R02PACA10N9LF](#)