


1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS

2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING

4 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.

5 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.

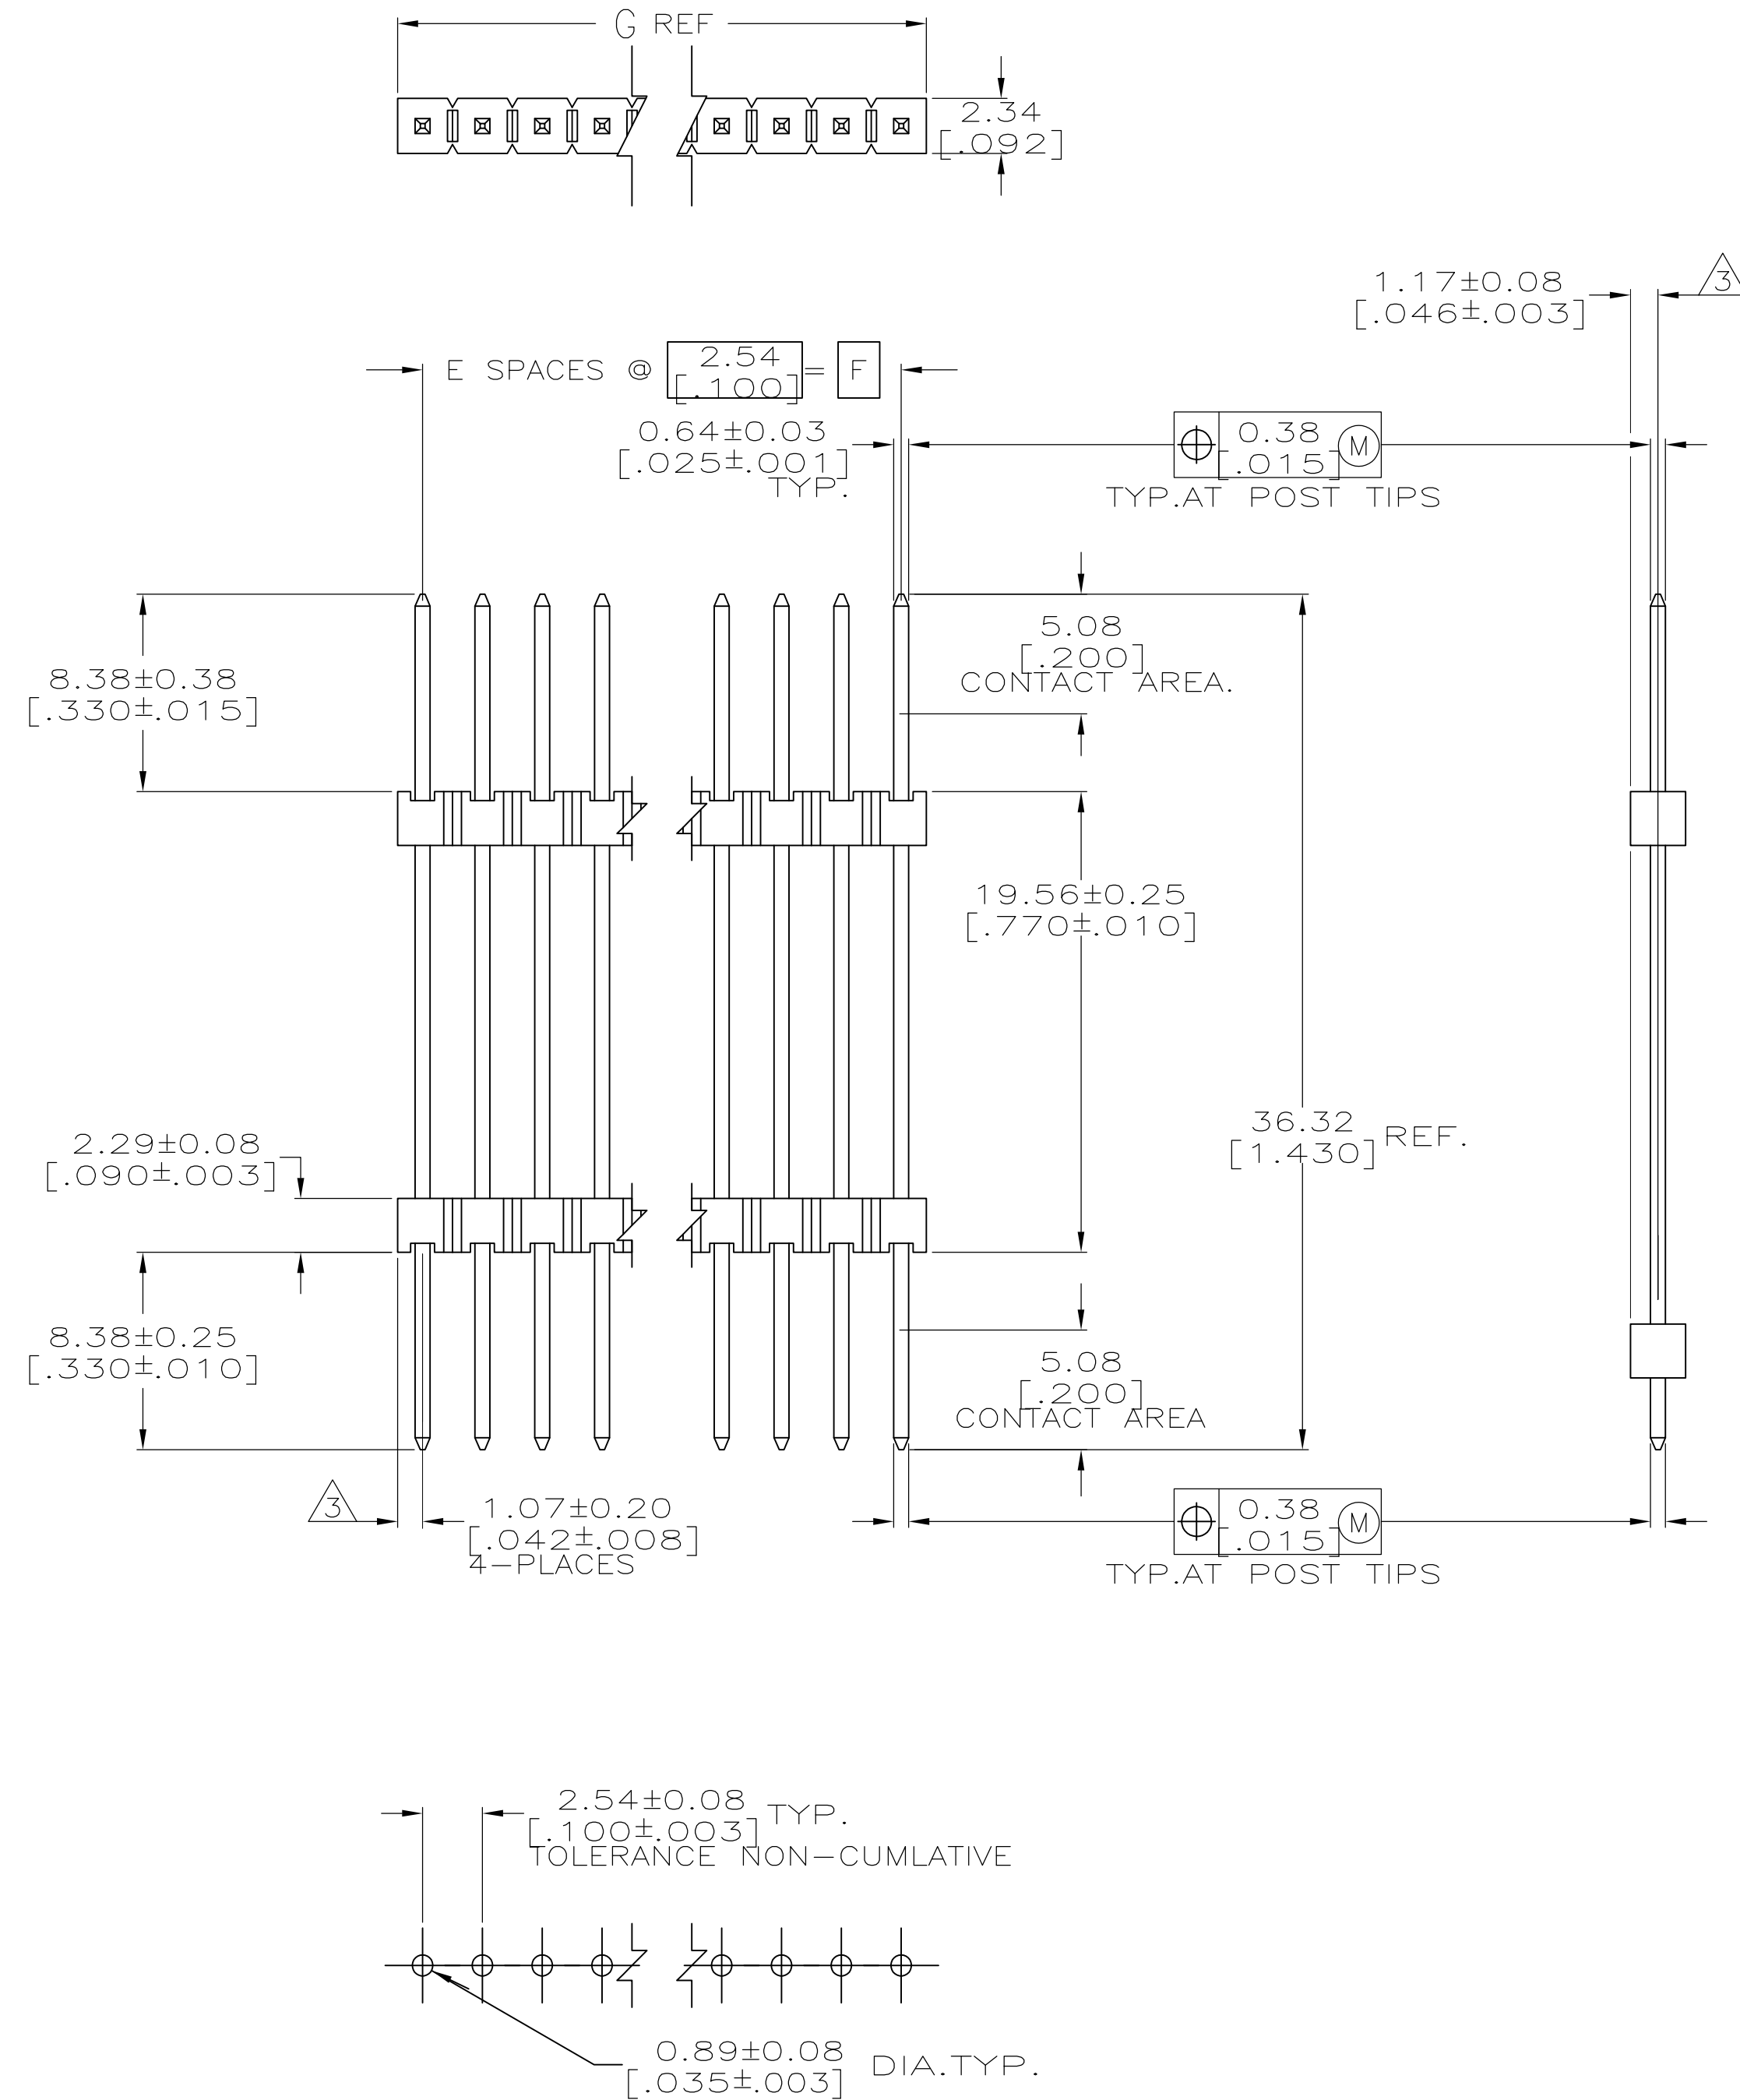

RECOMMENDED HOLE LAYOUT

[3.984]	[3.900]	39	40	4-146482-0
[3.884]	[3.800]	38	39	3-146482-9
[3.784]	[3.700]	37	38	3-146482-8
[3.684]	[3.600]	36	37	3-146482-7
[3.584]	[3.500]	35	36	3-146482-6
[3.484]	[3.400]	34	35	3-146482-5
[3.384]	[3.300]	33	34	3-146482-4
[3.284]	[3.200]	32	33	3-146482-3
[3.184]	[3.100]	31	32	3-146482-2
[3.084]	[3.000]	30	31	3-146482-1
[2.984]	[2.900]	29	30	3-146482-0
[2.884]	[2.800]	28	29	2-146482-9
[2.784]	[2.700]	27	28	2-146482-8
[2.684]	[2.600]	26	27	2-146482-7
[2.584]	[2.500]	25	26	2-146482-6
[2.484]	[2.400]	24	25	2-146482-5
[2.384]	[2.300]	23	24	2-146482-4
[2.284]	[2.200]	22	23	2-146482-3
[2.184]	[2.100]	21	22	2-146482-2
[2.084]	[2.000]	20	21	2-146482-1
[1.984]	[1.900]	19	20	2-146482-0
[1.884]	[1.800]	18	19	1-146482-9
[1.784]	[1.700]	17	18	1-146482-8
[1.684]	[1.600]	16	17	1-146482-7
[1.584]	[1.500]	15	16	1-146482-6
[1.484]	[1.400]	14	15	1-146482-5
[1.384]	[1.300]	13	14	1-146482-4
[1.284]	[1.200]	12	13	1-146482-3
[1.184]	[1.100]	11	12	1-146482-2
[1.084]	[1.000]	10	11	1-146482-1
[.984]	[.900]	9	10	1-146482-0
[.884]	[.800]	8	9	146482-9
[.784]	[.700]	7	8	146482-8
[.684]	[.600]	6	7	146482-7
[.584]	[.500]	5	6	146482-6
[.484]	[.400]	4	5	146482-5
[.384]	[.300]	3	4	146482-4
[.284]	[.200]	2	3	146482-3
[.184]	[.100]	1	2	146482-2
[.084]	-	-	1	146482-1
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 14-MAR-97 E. BRANDBERG CHK. 14-MAR-97 G. DUBINIZKI APP'D 14-MAR-97 G. DUBINIZKI		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± . 1 PLC ± .01 2 PLC ± 0.51[.02] 3 PLC ± 0.127[.005] 4 PLC ± 0.127[.005] ANGLES ±		NAME HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED	
MATERIAL 		FINISH 		SIZE A1	
WEIGHT —		APPLICATION SPEC PRODUCT SPEC		CAGE CODE 00779	
CUSTOMER DRAWING		DRAWING NO 146482		RESTRICTED TO	
		SCALE 4:1		SHEET 1 of 1 REV. P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-146482-5](#)