
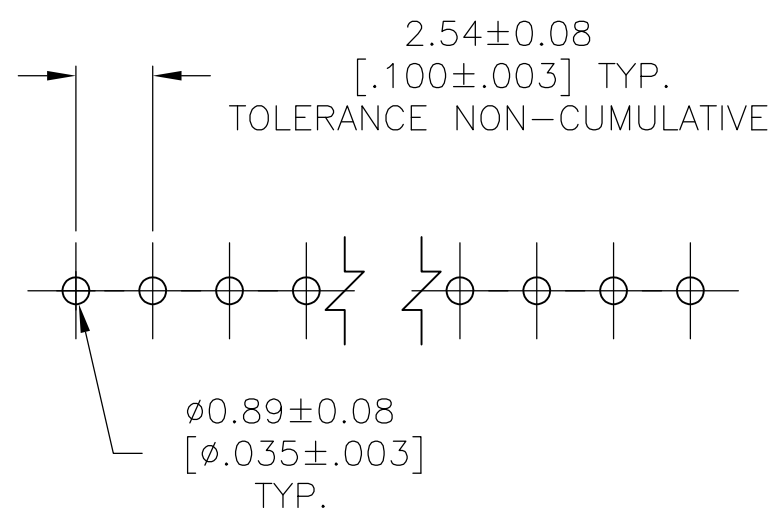
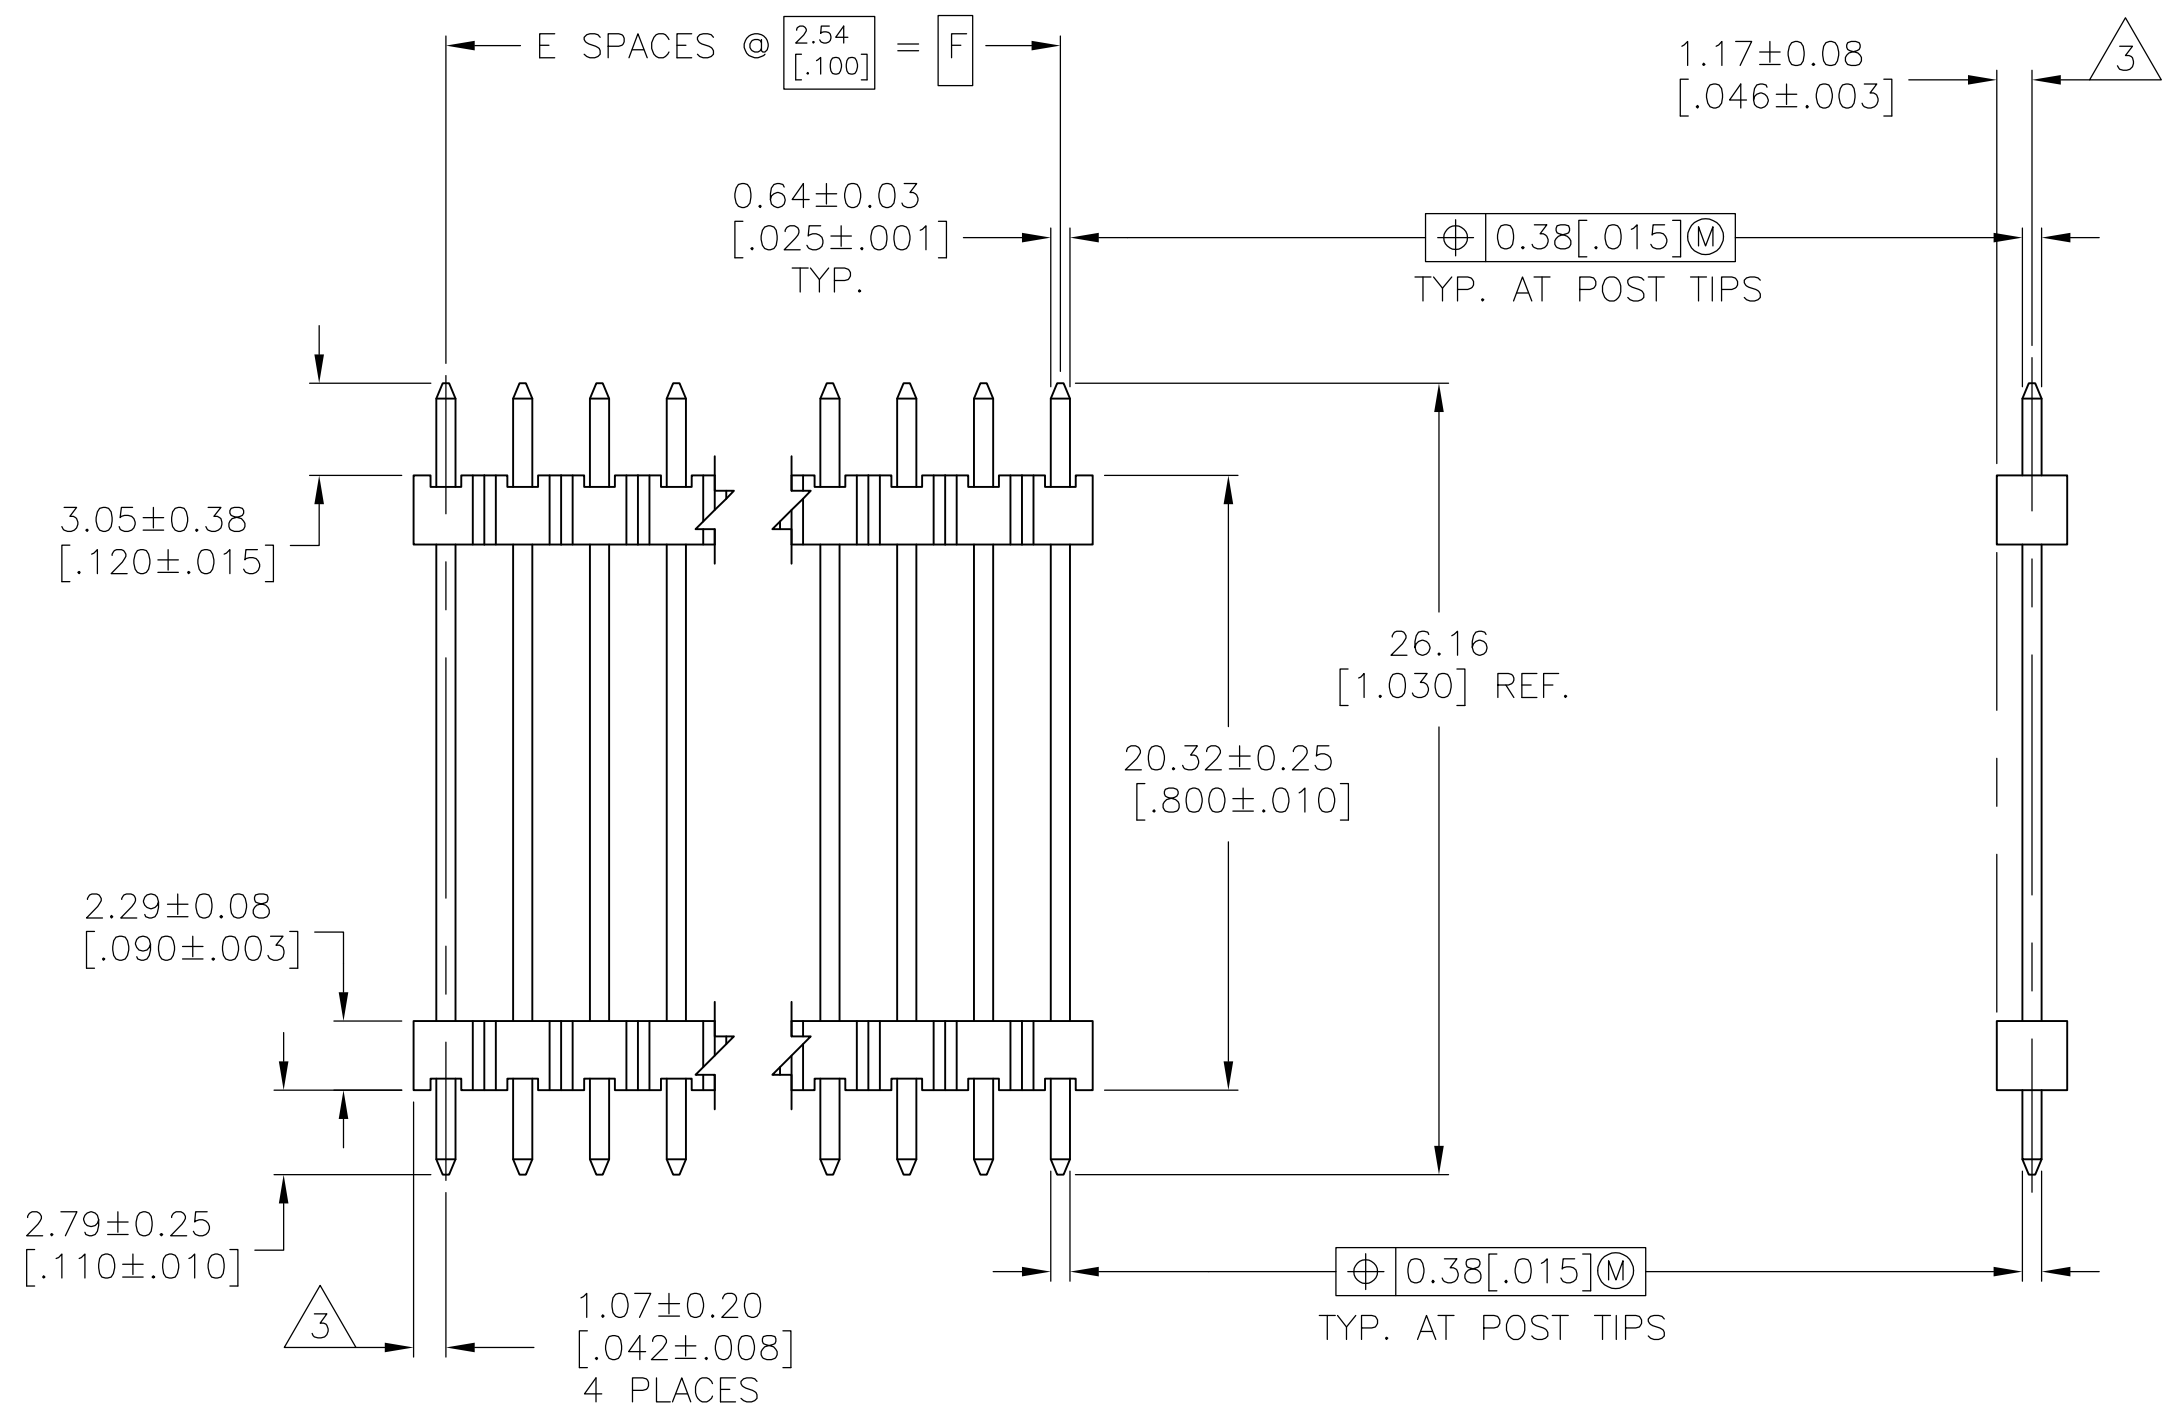


LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

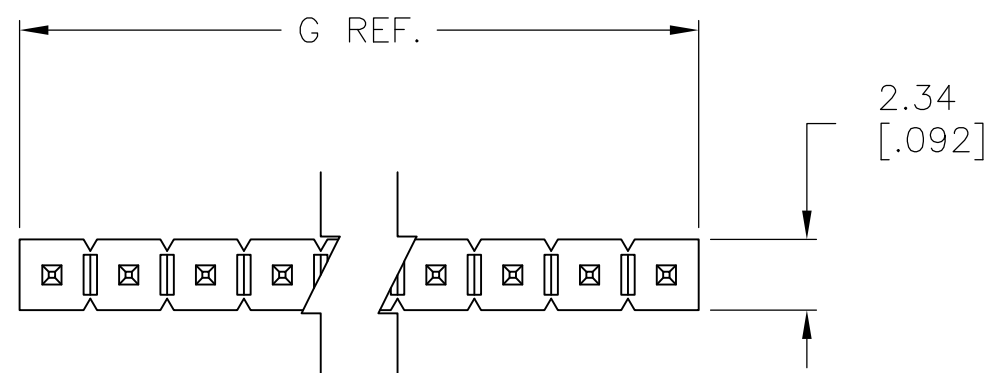


RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.00254–0.00508 [.000100–.000200] BRIGHT TIN–LEAD OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254–0.00508 [.000100–.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL ENTIRE POST.

6	101.19 [3.984]	99.06 [3.900]	39	40	9-146468-0
6	98.65 [3.884]	96.52 [3.800]	38	39	8-146468-9
6	96.11 [3.784]	93.98 [3.700]	37	38	8-146468-8
6	93.57 [3.684]	91.44 [3.600]	36	37	8-146468-7
6	91.03 [3.584]	88.90 [3.500]	35	36	8-146468-6
6	88.49 [3.484]	86.36 [3.400]	34	35	8-146468-5
6	85.95 [3.384]	83.82 [3.300]	33	34	8-146468-4
6	83.41 [3.284]	81.28 [3.200]	32	33	8-146468-3
6	80.87 [3.184]	78.74 [3.100]	31	32	8-146468-2
6	78.33 [3.084]	76.20 [3.000]	30	31	8-146468-1
6	75.79 [2.984]	73.66 [2.900]	29	30	8-146468-0
6	73.25 [2.884]	71.12 [2.800]	28	29	7-146468-9
6	70.71 [2.784]	68.58 [2.700]	27	28	7-146468-8
6	68.17 [2.684]	66.04 [2.600]	26	27	7-146468-7
6	65.63 [2.584]	63.50 [2.500]	25	26	7-146468-6
6	63.09 [2.484]	60.96 [2.400]	24	25	7-146468-5
6	60.55 [2.384]	58.42 [2.300]	23	24	7-146468-4
6	58.01 [2.284]	55.88 [2.200]	22	23	7-146468-3
6	55.47 [2.184]	53.34 [2.100]	21	22	7-146468-2
6	52.93 [2.084]	50.80 [2.000]	20	21	7-146468-1
6	50.39 [1.984]	48.26 [1.900]	19	20	7-146468-0
6	47.85 [1.884]	45.72 [1.800]	18	19	6-146468-9
6	45.31 [1.784]	43.18 [1.700]	17	18	6-146468-8
6	42.77 [1.684]	40.64 [1.600]	16	17	6-146468-7
6	40.23 [1.584]	38.10 [1.500]	15	16	6-146468-6
6	37.69 [1.484]	35.56 [1.400]	14	15	6-146468-5
6	35.15 [1.384]	33.02 [1.300]	13	14	6-146468-4
6	32.61 [1.284]	30.48 [1.200]	12	13	6-146468-3
6	30.07 [1.184]	27.94 [1.100]	11	12	6-146468-2
6	27.53 [1.084]	25.40 [1.000]	10	11	6-146468-1
6	24.99 [.984]	22.86 [.900]	9	10	6-146468-0
6	22.45 [.884]	20.32 [.800]	8	9	5-146468-9
6	19.91 [.784]	17.78 [.700]	7	8	5-146468-8
6	17.37 [.684]	15.24 [.600]	6	7	5-146468-7
6	14.83 [.584]	12.70 [.500]	5	6	5-146468-6
6	12.29 [.484]	10.16 [.400]	4	5	5-146468-5
6	9.75 [.384]	7.62 [.300]	3	4	5-146468-4
6	7.21 [.284]	5.08 [.200]	2	3	5-146468-3
6	4.67 [.184]	2.54 [.100]	1	2	5-146468-2
6	2.13 [.084]	-	-	1	5-146468-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	101.19 [3.984]	99.06 [3.900]	39	40	4-146468-0
5	98.65 [3.884]	96.52 [3.800]	38	39	3-146468-9
5	96.1 [3.784]	93.98 [3.700]	37	38	3-146468-8
5	93.57 [3.684]	91.44 [3.600]	36	37	3-146468-7
5	91.03 [3.584]	88.90 [3.500]	35	36	3-146468-6
5	88.49 [3.484]	86.36 [3.400]	34	35	3-146468-5
5	85.95 [3.384]	83.82 [3.300]	33	34	3-146468-4
5	83.41 [3.284]	81.28 [3.200]	32	33	3-146468-3
5	80.87 [3.184]	78.74 [3.100]	31	32	3-146468-2
5	78.33 [3.084]	76.20 [3.000]	30	31	3-146468-1
5	75.79 [2.984]	73.66 [2.900]	29	30	3-146468-0
5	73.25 [2.884]	71.12 [2.800]	28	29	2-146468-9
5	70.71 [2.784]	68.58 [2.700]	27	28	2-146468-8
5	68.17 [2.684]	66.04 [2.600]	26	27	2-146468-7
5	65.63 [2.584]	63.50 [2.500]	25	26	2-146468-6
5	63.09 [2.484]	60.96 [2.400]	24	25	2-146468-5
5	60.55 [2.384]	58.42 [2.300]	23	24	2-146468-4
5	58.01 [2.284]	55.88 [2.200]	22	23	2-146468-3
5	55.47 [2.184]	53.34 [2.100]	21	22	2-146468-2
5	52.93 [2.084]	50.80 [2.000]	20	21	2-146468-1
5	50.39 [1.984]	48.26 [1.900]	19	20	2-146468-0
5	47.85 [1.884]	45.72 [1.800]	18	19	1-146468-9
5	45.31 [1.784]	43.18 [1.700]	17	18	1-146468-8
5	42.77 [1.684]	40.64 [1.600]	16	17	1-146468-7
5	40.23 [1.584]	38.10 [1.500]	15	16	1-146468-6
5	37.69 [1.484]	35.56 [1.400]	14	15	1-146468-5
5	35.15 [1.384]	33.02 [1.300]	13	14	1-146468-4
5	32.61 [1.284]	30.48 [1.200]	12	13	1-146468-3
5	30.07 [1.184]	27.94 [1.100]	11	12	1-146468-2
5	27.53 [1.084]	25.40 [1.000]	10	11	1-146468-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146468-0
5	22.45 [.884]	20.32 [.800]	8	9	146468-9
5	19.91 [.784]	17.78 [.700]	7	8	146468-8
5	17.37 [.684]	15.24 [.600]	6	7	146468-7
5	14.83 [.584]	12.70 [.500]	5	6	146468-6
5	12.29 [.484]	10.16 [.400]	4	5	146468-5
5	9.75 [.384]	7.62 [.300]	3	4	146468-4
5	7.21 [.284]	5.08 [.200]	2	3	146468-3
5	4.67 [.184]	2.54 [.100]	1	2	146468-2
5	2.13 [.084]	-	-	1	146468-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 05-MAR-97 E. BRANDBERG CHK. 05-MAR-97 G. DUBNICZKI APPR. 05-MAR-97 G. DUBNICZKI		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		Ø P L/C ± - 1 P L/C ± - 2 P L/C ± 0.51[.02] 3 P L/C ± 0.127[.005] 4 P L/C ± 0.127[.005] ANGLES FINISH		PRODUCT SPEC	
MATERIAL		APPLICATION SPEC		SIZE	
		WEIGHT		GAGE CODE	
SEE TABLE		CUSTOMER DRAWING		DRAWING NO	
				A1 00779	
				146468	
				SCALE	
				4:1	
				SHEET	
				1 OF 1	
				REV	
				A1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-146468-1](#)