


LOC	DIST	REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	DWN
			B1	REVISED PER ECO-08-027061	05NOV08	CC

1. WIRE RANGE: 1.31mm² (16 AWG)
2. INSULATION RANGE: 3.10 [.122] DIA.
- 3

FINISH: 0.76μm [.000030 in] GOLD IN LOCALIZED GOLD PLATE AREA OVER 1.27μm [.00005 in] MINIMUM NICKEL.
- 4

FINISH: 2.54μm [.00001 in] MINIMUM TIN IN LOCALIZED TIN PLATE AREA.

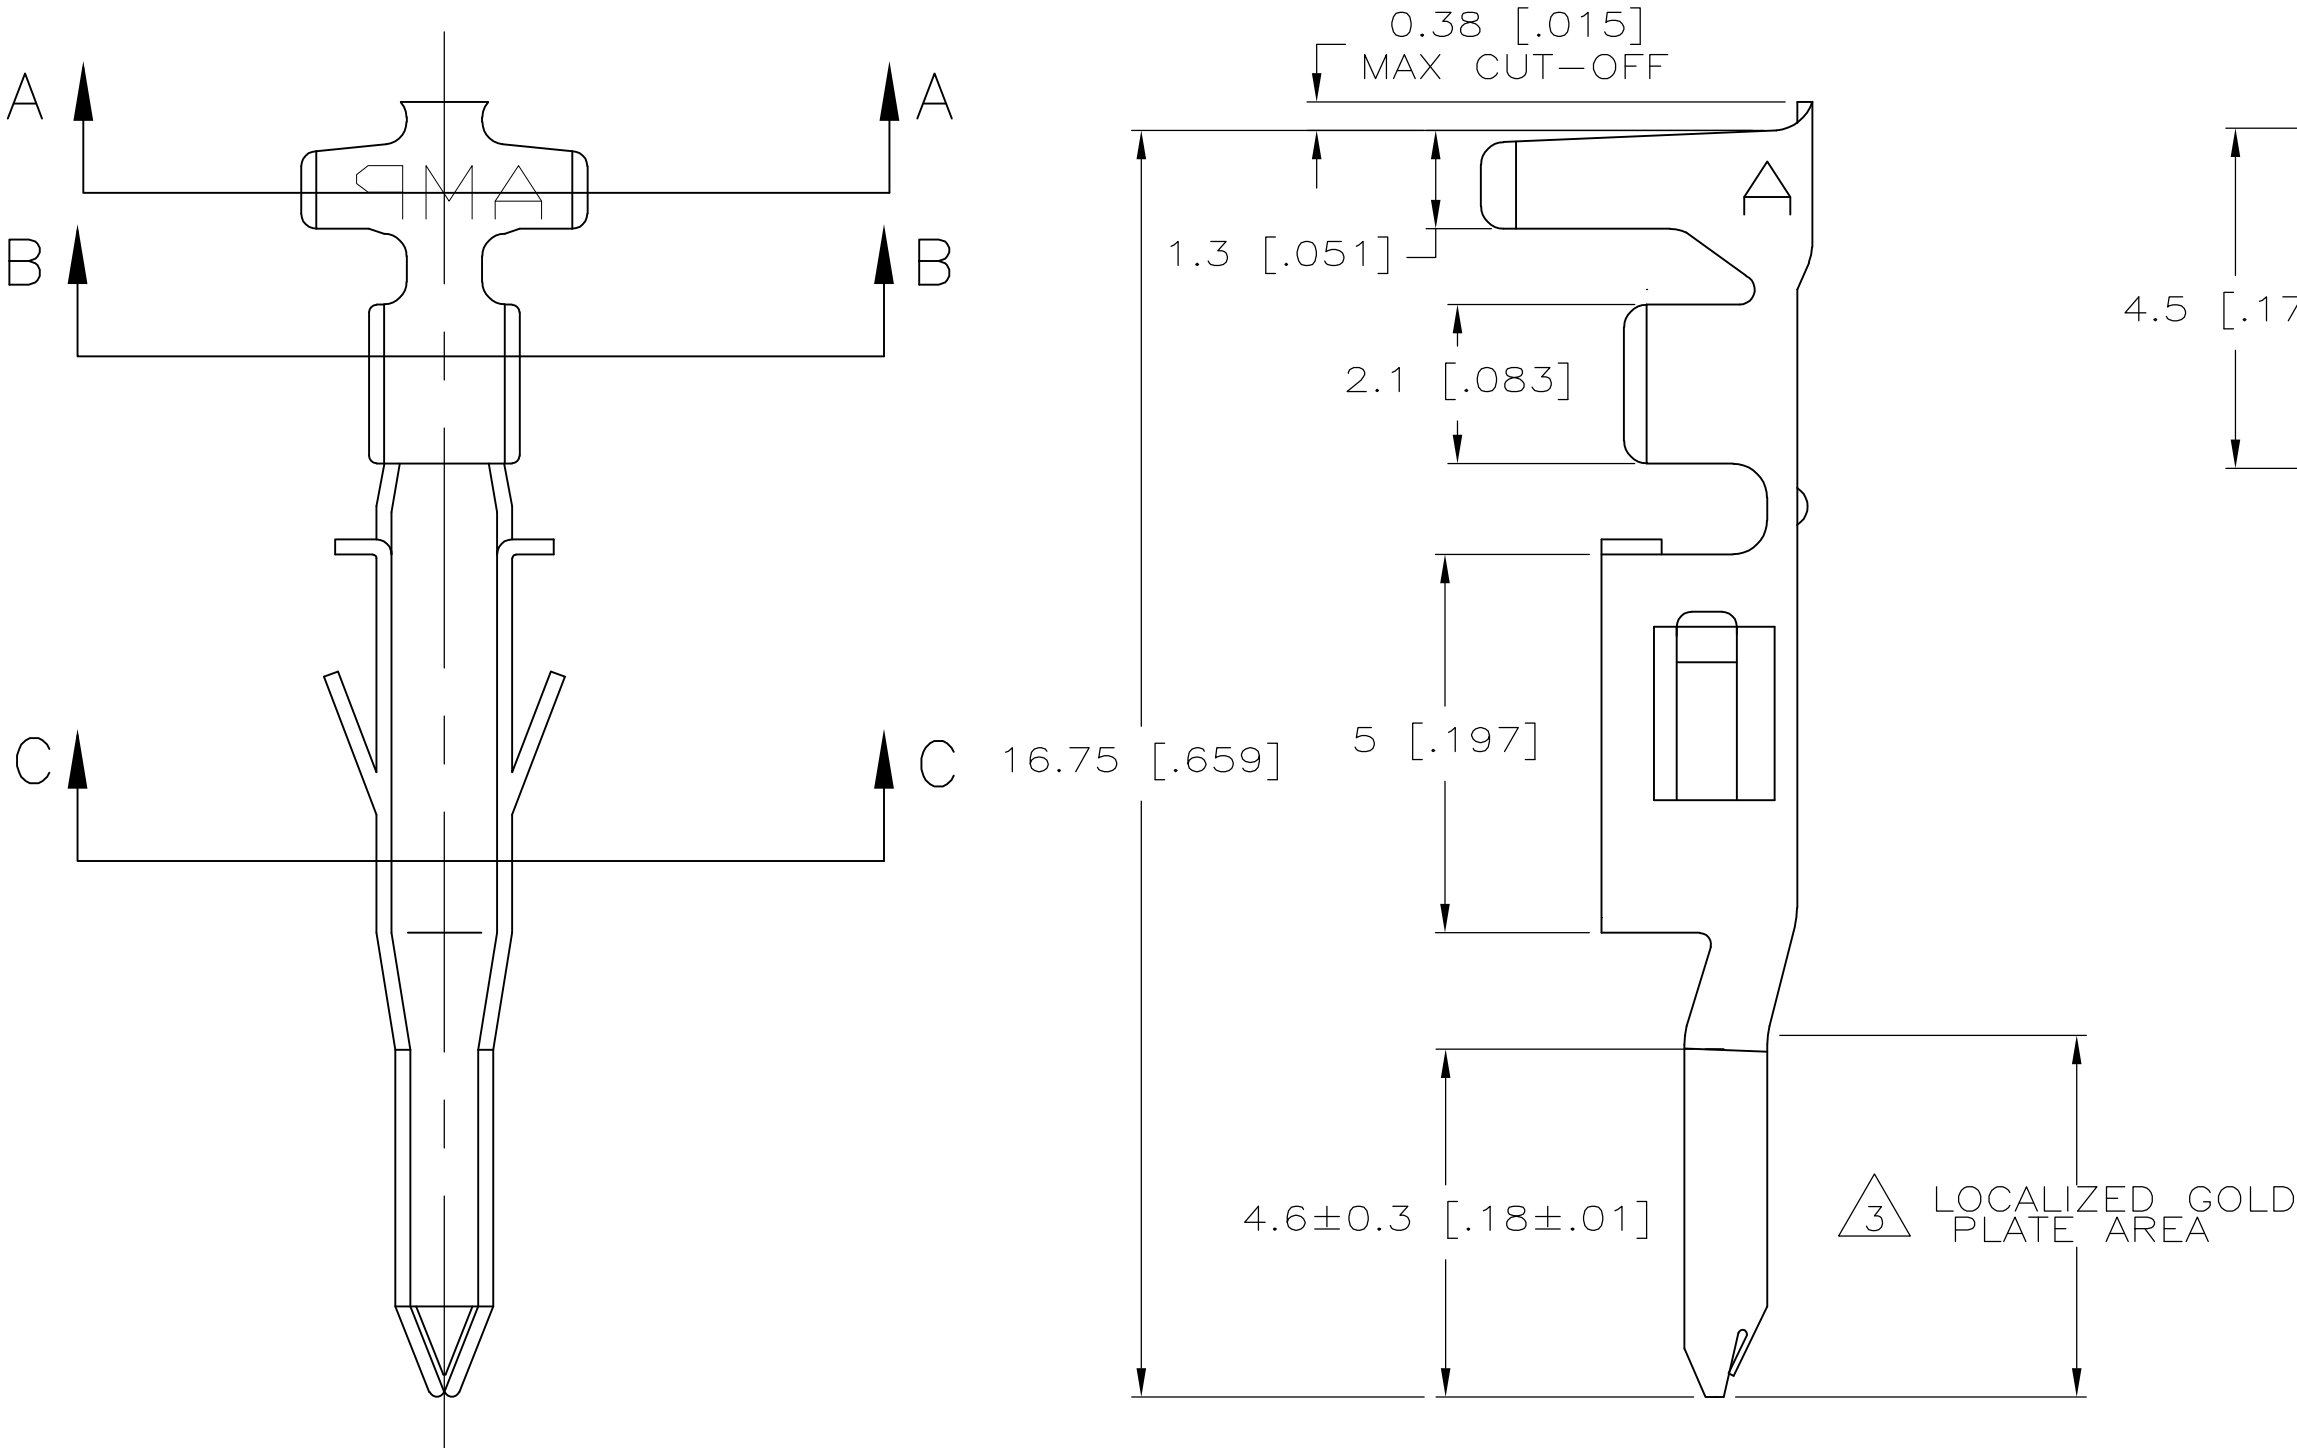

34	PHOS. BRZ.	1586840-4
PRE-TIN	PHOS. BRZ.	1586840-3
34	BRASS	1586840-2
PRE-TIN	BRASS	1586840-1
FINISH	MATERIAL	PART NO.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 04APR2007	Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK C.CASH 04APR2007				
	0 PLC ± 1 PLC ± 2 PLC ± 0.13 [.005] 3 PLC ± 4 PLC ±	APVD C. CASH 04APR2007	NAME TERMINAL, PIN (LOOSE PIECE) VAL-U-LOK(TM)			
	ANGLES ± 0°30'	PRODUCT SPEC	SIZE A2			
MATERIAL	FINISH	APPLICATION SPEC	CAGE CODE 00779	DRAWING NO. C=1586840	RESTRICTED TO	REV B1
CUSTOMER DRAWING		WEIGHT	SCALE 10:1	SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586840-3](#)