

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

—

© COPYRIGHT

By

ALL RIGHTS RESERVED

LOC

DIST

AD

39

REVISIONS

P	LT
---	----

LTR

DESCRIPTION

DATE _____

DWRN	
------	--

	APV
--	-----

4	
---	--

REVI


PER

Ω-14-000068


26APR

NK

	MM
--	----

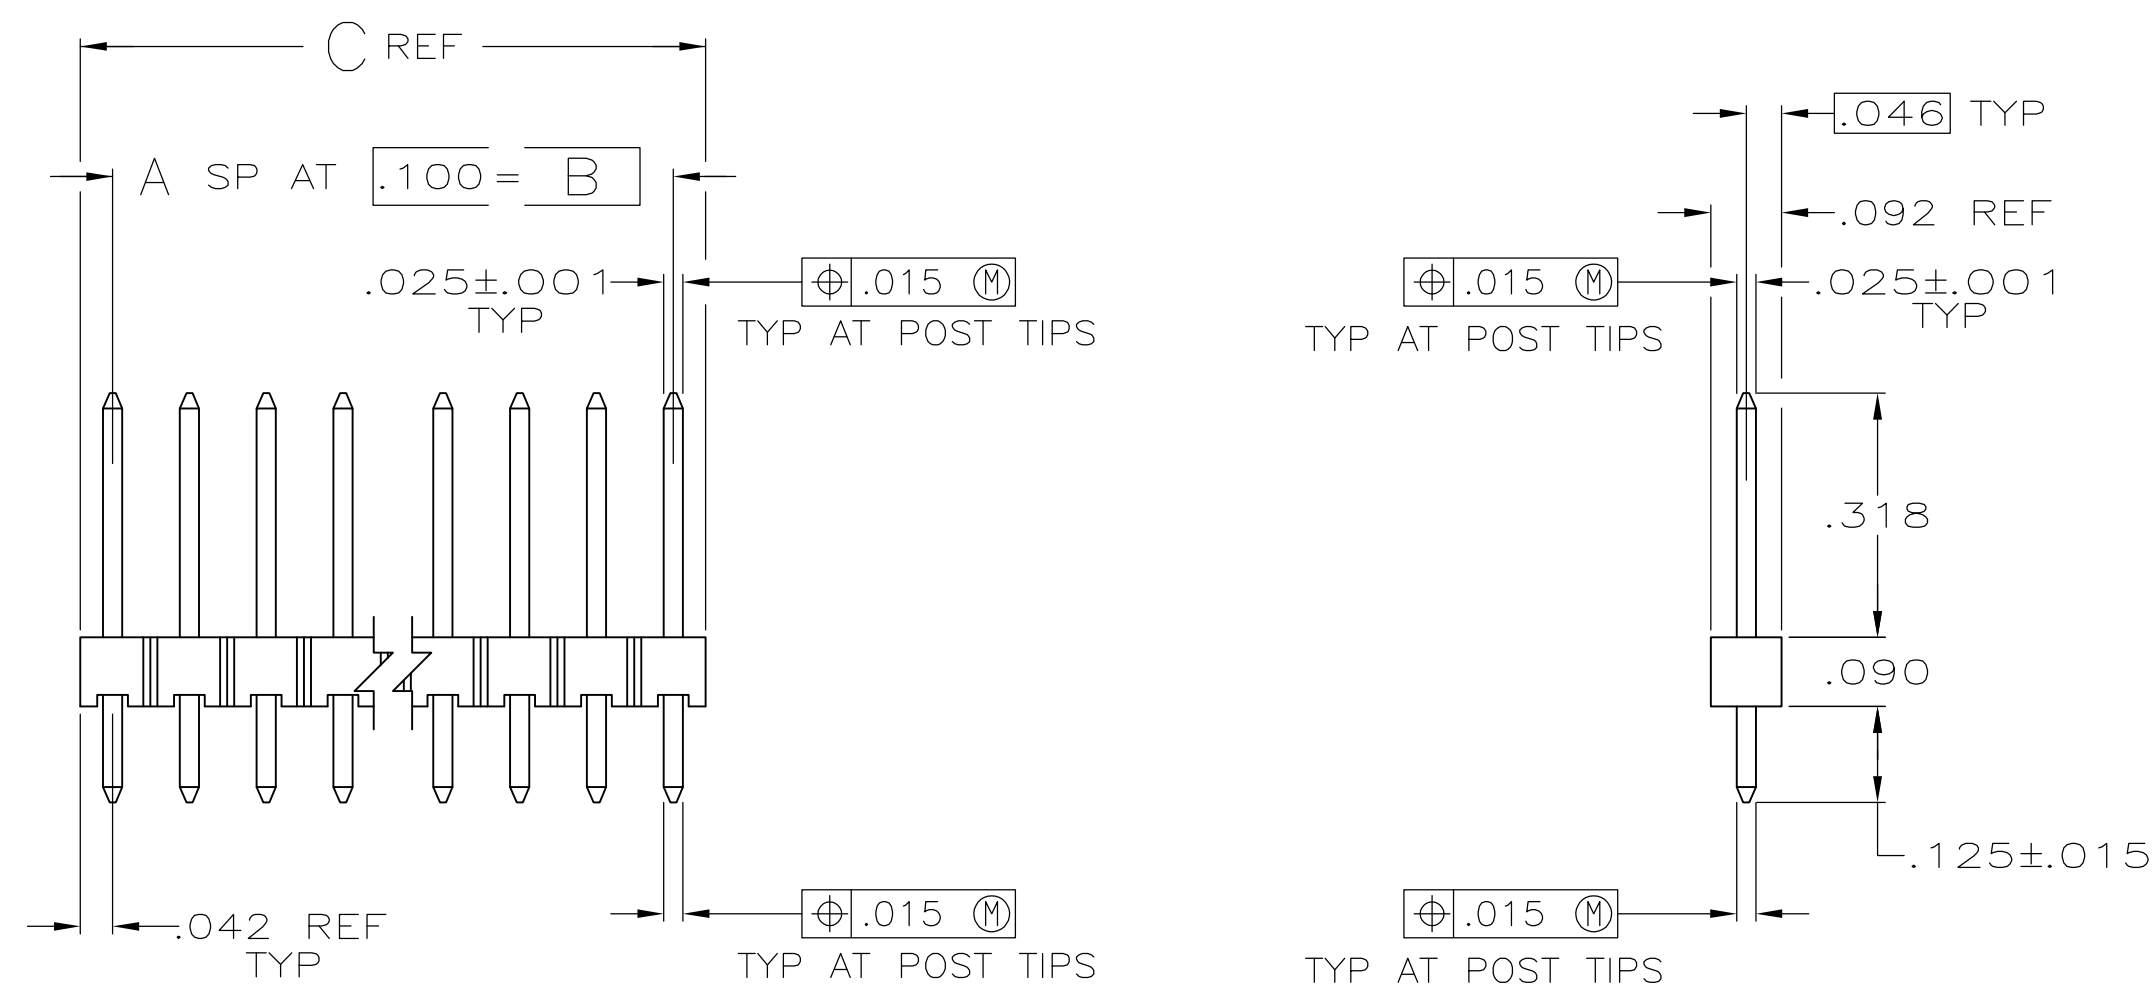

- | | |
|---|---|
| 1 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD |
| 2 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS |
| 3 | PACKAGE IN SINGLE TUBES |
| 4 | .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL. |
| 5 | .000100-.000200 BRIGHT TIN OVER .000050 NICKEL. |
| 6 | PRELIMINARY PART - NOT RELEASED FOR PRODUCTION. |
| 7 | HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK. |
| 8 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

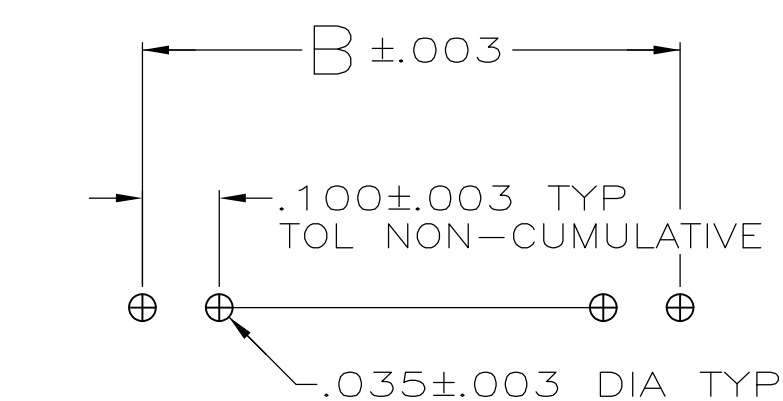

RECOMMENDED HOLE LAYOUT

		OBSOLETE	5		.484	.400	4	5	5-103321-3
			5	6	1.384	1.300	13	14	5-103321-2
			5	6	1.184	1.100	11	12	5-103321-1
			5	6	1.084	1.000	10	11	5-103321-0
			5	6	.884	.800	8	9	4-103321-9
			5		3.984	3.900	39	40	4-103321-8
			5		1.584	1.500	15	16	4-103321-7
			5		.784	.700	7	8	4-103321-6
			5		.284	.200	2	3	4-103321-5
			5		.184	.100	1	2	4-103321-4
			5	6	.084	—	—	1	4-103321-3
SUPERSEDED BY 1-103321-4				3	1.384	1.300	13	14	4-103321-2
SUPERSEDED BY 103321-3				3	.284	.200	2	3	4-103321-1
			4		3.984	3.900	39	40	4-103321-0
	R	OBSOLETE	4		3.884	3.800	38	39	3-103321-9
	R	OBSOLETE	4		3.784	3.700	37	38	3-103321-8
	R	OBSOLETE	4		3.684	3.600	36	37	3-103321-7
			4		3.584	3.500	35	36	3-103321-6
	R	OBSOLETE	4		3.484	3.400	34	35	3-103321-5
	R	OBSOLETE	4		3.384	3.300	33	34	3-103321-4
	R	OBSOLETE	4		3.284	3.200	32	33	3-103321-3
	A	OBSOLETE	4		3.184	3.100	31	32	3-103321-2
	R	OBSOLETE	4		3.084	3.000	30	31	3-103321-1
	R	OBSOLETE	4		2.984	2.900	29	30	3-103321-0
	R	OBSOLETE	4		2.884	2.800	28	29	2-103321-9
	R	OBSOLETE	4		2.784	2.700	27	28	2-103321-8
	R	OBSOLETE	4		2.684	2.600	26	27	2-103321-7
	R	OBSOLETE	4		2.584	2.500	25	26	2-103321-6
			4		2.484	2.400	24	25	2-103321-5
	R	OBSOLETE	4		2.384	2.300	23	24	2-103321-4
	R	OBSOLETE	4		2.284	2.200	22	23	2-103321-3
	R	OBSOLETE	4		2.184	2.100	21	22	2-103321-2
	R	OBSOLETE	4		2.084	2.000	20	21	2-103321-1
A	SUPERSEDED BY 7-146274-0		4		1.984	1.900	19	20	2-103321-0
	R	OBSOLETE	4		1.884	1.800	18	19	1-103321-9
	R	OBSOLETE	4		1.784	1.700	17	18	1-103321-8
	R	OBSOLETE	4		1.684	1.600	16	17	1-103321-7
			4		1.584	1.500	15	16	1-103321-6
	R	OBSOLETE	4		1.484	1.400	14	15	1-103321-5
			4		1.384	1.300	13	14	1-103321-4
	R	OBSOLETE	4		1.284	1.200	12	13	1-103321-3
	R	OBSOLETE	4		1.184	1.100	11	12	1-103321-2
	R	OBSOLETE	4		1.084	1.000	10	11	1-103321-1
			4		.984	.900	9	10	1-103321-0
			4		.884	.800	8	9	103321-9
			4		.784	.700	7	8	103321-8
			4		.684	.600	6	7	103321-7
			4		.584	.500	5	6	103321-6
			4		.484	.400	4	5	103321-5
			4		.384	.300	3	4	103321-4
			4		.284	.200	2	3	103321-3
			4		.184	.100	1	2	103321-2
			4		.084	—	—	1	103321-1
			</						

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 150C192 J. MARTINELLI QW JOHN KNITTLE 23NOV92		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 .010 ± .005 1 .010 ± .005 2 .010 ± .005 3 .010 ± .005 4 .010 ± .005 5 .010 ± .005 6 .010 ± .005 7 .010 ± .005 8 .010 ± .005 9 .010 ± .005 10 .010 ± .005 11 .010 ± .005 12 .010 ± .005 13 .010 ± .005 14 .010 ± .005 15 .010 ± .005 16 .010 ± .005 17 .010 ± .005 18 .010 ± .005 19 .010 ± .005 20 .010 ± .005 21 .010 ± .005 22 .010 ± .005 23 .010 ± .005 24 .010 ± .005 25 .010 ± .005 26 .010 ± .005 27 .010 ± .005 28 .010 ± .005 29 .010 ± .005 30 .010 ± .005 31 .010 ± .005 32 .010 ± .005 33 .010 ± .005 34 .010 ± .005 35 .010 ± .005 36 .010 ± .005 37 .010 ± .005 38 .010 ± .005 39 .010 ± .005 40 .010 ± .005 41 .010 ± .005 42 .010 ± .005 43 .010 ± .005 44 .010 ± .005 45 .010 ± .005 46 .010 ± .005 47 .010 ± .005 48 .010 ± .005 49 .010 ± .005 50 .010 ± .005 51 .010 ± .005 52 .010 ± .005 53 .010 ± .005 54 .010 ± .005 55 .010 ± .005 56 .010 ± .005 57 .010 ± .005 58 .010 ± .005 59 .010 ± .005 60 .010 ± .005 61 .010 ± .005 62 .010 ± .005 63 .010 ± .005 64 .010 ± .005 65 .010 ± .005 66 .010 ± .005 67 .010 ± .005 68 .010 ± .005 69 .010 ± .005 70 .010 ± .005 71 .010 ± .005 72 .010 ± .005 73 .010 ± .005 74 .010 ± .005 75 .010 ± .005 76 .010 ± .005 77 .010 ± .005 78 .010 ± .005 79 .010 ± .005 80 .010 ± .005 81 .010 ± .005 82 .010 ± .005 83 .010 ± .005 84 .010 ± .005 85 .010 ± .005 86 .010 ± .005 87 .010 ± .005 88 .010 ± .005 89 .010 ± .005 90 .010 ± .005 91 .010 ± .005 92 .010 ± .005 93 .010 ± .005 94 .010 ± .005 95 .010 ± .005 96 .010 ± .005 97 .010 ± .005 98 .010 ± .005 99 .010 ± .005 100 .010 ± .005 101 .010 ± .005 102 .010 ± .005 103 .010 ± .005 104 .010 ± .005 105 .010 ± .005 106 .010 ± .005 107 .010 ± .005 108 .010 ± .005 109 .010 ± .005 110 .010 ± .005 111 .010 ± .005 112 .010 ± .005 113 .010 ± .005 114 .010 ± .005 115 .010 ± .005 116 .010 ± .005 117 .010 ± .005 118 .010 ± .005 119 .010 ± .005 120 .010 ± .005 121 .010 ± .005 122 .010 ± .005 123 .010 ± .005 124 .010 ± .005 125 .010 ± .005 126 .010 ± .005 127 .010 ± .005 128 .010 ± .005 129 .010 ± .005 130 .010 ± .005 131 .010 ± .005 132 .010 ± .005 133 .010 ± .005 134 .010 ± .005 135 .010 ± .005 136 .010 ± .005 137 .010 ± .005 138 .010 ± .005 139 .010 ± .005 140 .010 ± .005 141 .010 ± .005 142 .010 ± .005 143 .010 ± .005 144 .010 ± .005 145 .010 ± .005 146 .010 ± .005 147 .010 ± .005 148 .010 ± .005 149 .010 ± .005 150 .010 ± .005 151 .010 ± .005 152 .010 ± .005 153 .010 ± .005 154 .010 ± .005 155 .010 ± .005 156 .010 ± .005 157 .010 ± .005 158 .010 ± .005 159 .010 ± .005 160 .010 ± .005 161 .010 ± .005 162 .010 ± .005 163 .010 ± .005 164 .010 ± .005 165 .010 ± .005 166 .010 ± .005 167 .010 ± .005 168 .010 ± .005 169 .010 ± .005 170 .010 ± .005 171 .010 ± .005 172 .010 ± .005 173 .010 ± .005 174 .010 ± .005 175 .010 ± .005 176 .010 ± .005 177 .010 ± .005 178 .010 ± .005 179 .010 ± .005 180 .010 ± .005 181 .010 ± .005 182 .010 ± .005 183 .010 ± .005 184 .010 ± .005 185 .010 ± .005 186 .010 ± .005 187 .010 ± .005 188 .010 ± .005 189 .010 ± .005 190 .010 ± .005 191 .010 ± .005 192 .010 ± .005 193 .010 ± .005 194 .010 ± .005 195 .010 ± .005 196 .010 ± .005 197 .010 ± .005 198 .010 ± .005 199 .010 ± .005 200 .010 ± .005 201 .010 ± .005 202 .010 ± .005 203 .010 ± .005 204 .010 ± .005 205 .010 ± .005 206 .010 ± .005 207 .010 ± .005 208 .010 ± .005 209 .010 ± .005 210 .010 ± .005 211 .010 ± .005 212 .010 ± .005 213 .010 ± .005 214 .010 ± .005 215 .010 ± .005 216 .010 ± .005 217 .010 ± .005 218 .010 ± .005 219 .010 ± .005 220 .010 ± .005 221 .010 ± .005 222 .010 ± .005 223 .010 ± .005 224 .010 ± .005 225 .010 ± .005 226 .010 ± .005 227 .010 ± .005 228 .010 ± .005 229 .010 ± .005 230 .010 ± .005 231 .010 ± .005 232 .010 ± .005 233 .010 ± .005 234 .010 ± .005 23			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103321-0](#)