

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0528850974

Status:


Active

Overview:

SlimStack Board-to-Board Connectors

Description:

SlimStack Board-to-Board Connector, 0.635mm Pitch, 0.635 Series, Receptacle, 6.00 to 10.00mm Mated Height, 6.40mm Mated Width, 90 Circuits

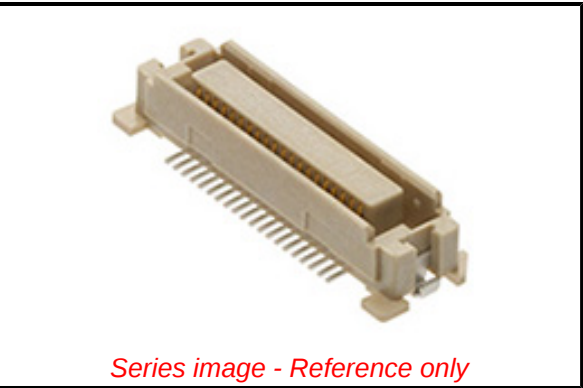

Documents:	
3D Model	RoHS Certificate of Compliance (PDF)
Drawing (PDF)	Product Literature (PDF)
Product Specification 527600000-000 (PDF)	Product Literature (PDF)
Packaging Specification SPK-52885-001-001 (PDF)	

Agency Certification	
UL	E29179
General	
Product Family	PCB Receptacles
Series	52885
Application	Board-to-Board, Signal
Comments	Stacking-Type, Stacking-Type
Datasheet Order No	987651-8807, 987651-8808_ZH, 987651-8810_DE, 987651-8811_JA, 987651-8812_KO, 987651-8813_ES
Overview	SlimStack Board-to-Board Connectors
Product Guide Order No	987651-8281
Product Literature Order No	987652-0196, Reference Guide#
Product Name	SlimStack
Series Name	0.635
UPC	822348166053
Physical	
Circuits (Loaded)	90
Circuits (maximum)	90
Color - Resin	Natural
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Capable	No
Lock to Mating Part	None
Mated Height	10.00mm, 6.00mm, 7.00mm, 8.00mm, 9.00mm
Mated Width	6.40mm
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1127.151/mg
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	0.64mm
Plating min - Mating	0.254µm
Plating min - Termination	2.032µm
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-55° to +105°C

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/71/2019 (16 July 2019)	
Halogen-Free	
Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

52885 Series

Mates With

SlimStack 0.635 Plug [55091](#) , [53625](#) , [53647](#) , [53649](#) , [53627](#)

Termination Interface: Style	Surface Mount
Electrical	
Current - Maximum per Contact	0.5A
Voltage - Maximum	100V
Material Info	
Reference - Drawing Numbers	
Packaging Specification	SPK-52885-001-001
Product Specification	527600000-000
Sales Drawing	SD-52885-003-001, SD-52885-004-001

This document was generated on 09/26/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[52885-0974](#)