



LOC	DIST	REVISIONS				
CE	16	P	LTR	DESCRIPTION	DATE	DWN
			A	RELEASE PER NPR	25 OCT 05	CSV
						APVD
						JD

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0.5 dB PLUS CABLE  
ATTENUATION OF 1.5dB/km AT 1300nm (SEE TABLE)
- 2 GEOMETRY REQUIREMENTS:  
RADIUS OF CURVATURE : 10–30 mm
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF  
TYCO ELECTRONICS STANDARD 230–702

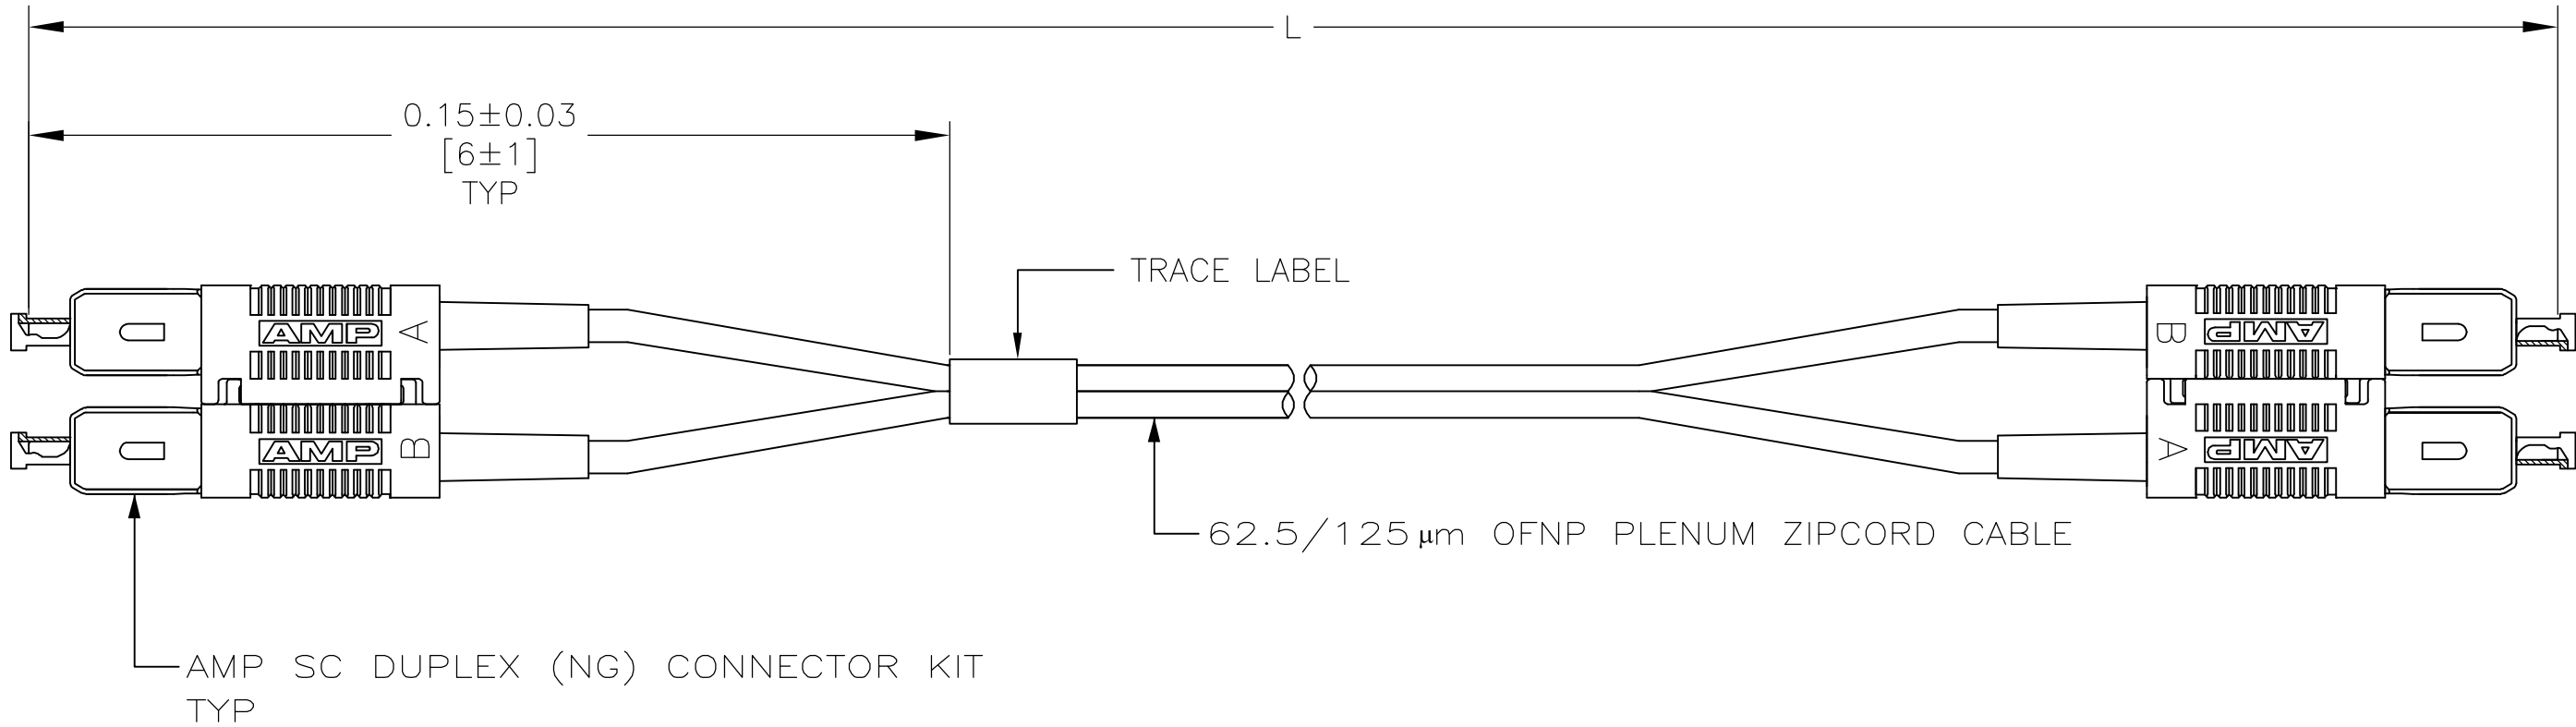

0.65	100.00±1.00 [3937.0±39.0]	9–6374039–9
0.57	50.00±0.50 [1969.0±20.0]	5–6374039–0
0.54	30.00±0.30 [1181.0±12.0]	3–6374039–0
0.53	20.00±0.30 [590.6±12.0]	2–6374039–0
0.52	14.00±0.15 [551.2±6.0]	1–674039–6
0.52	15.00±0.15 [590.6±6.0]	1–6374039–5
0.51	12.00±0.15 [472.4±6.0]	1–6374039–4
0.51	11.00±0.15 [433.1±6.0]	1–6374039–3
0.51	7.00±0.08 [275.6±3.0]	1–6374039–2
0.52	16.45±0.30 [648.0±12.0]	1–6374039–1
0.51	10.00±0.15 [394.0±6.0]	1–6374039–0
0.52	13.41±0.15 [528.0±6.0]	6374039–9
0.51	12.19±0.15 [480.0±6.0]	6374039–8
0.51	9.75±0.15 [384.0±6.0]	6374039–7
0.50	4.57±0.08 [180.0±3.0]	6374039–6
0.51	5.00±0.08 [197.0±3.0]	6374039–5
0.50	3.00±0.05 [118.0±2.0]	6374039–3
0.50	2.00±0.05 [79.0±2.0]	6374039–2
0.50	1.00±0.05 [39.0±2.0]	6374039–1

1 MAX IL (dB)	L	PART NUMBER
---------------	---	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	C.S.VASU	25 OCT 05	<b>tyco</b> <b>Electronics</b>				Tyco Electronics Corporation Harrisburg, Pa 17105-3608						
			CHK	J.DUNCAN	25 OCT 05											
DIMENSIONS: METERS [INCHES]			TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD	J.DUNCAN	25 OCT 05	NAME							
						CABLE ASSEMBLY, FIBER OPTIC, 62.5/125µm PLENUM ZIP, AMP SC DUPLEX FIBER CHANNEL, OPTIMATE										
			0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -			PRODUCT SPEC			-							
						APPLICATION SPEC			-							
						WEIGHT			-							
MATERIAL			FINISH			A2			00779		C=6374039			RESTRICTED TO		
-			-			CUSTOMER DRAWING			SCALE		NTS		SHEET		1 of 1	
															REV	
															A	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-6374039-0](#)