

MPCI-VGA

Mini-PCI Module
Volari Z9M GPU



Features

High Performance 2D Accelerator

High Efficient BroadBahn™ Memory Architecture

VGA Interface

LVDS Interface (optional, see note)

High Performance LVDS Interface

MiniPCI Bus Interface

Specifications

Board Format MiniPCI,
59.75 mm x 50.95 mm

Processor Volari Z9M GPU
Built-in hardware command queue, Direct Draw Accelerator, GDI 2000 Accelerator
Built-in an 1T pipelined 64-bit BITBLT graphics engine with the following functions:

- 256 raster operations
- Rectangle fill
- Color expansion
- Enhanced color expansion
- Line-drawing with styled pattern
- Built-in bytes pattern registers
- Built-in 8x8 mask registers
- Rectangle clipping
- Transparent BitBlt with source and destination keys
- Source data in command queue Bitblt

Supports memory-mapped, zero wait-state, burst engine write
Built-in 64x64x2 bit-mapped mono hardware cursor
Maximum 256MB frame buffer with linear addressing
Built-in source read-buffer to minimize engine wait-state
Built-in destination read-buffer to minimize engine wait-state

RAM Integrated 8 MByte DDR SDRAM memory

VGA up to 1600 x 1200 x 16

LVDS up to 1600 x 1200
18 bit display support
(optional, see note)

DDC Supports DDC1, DDC2B and DDC 3.0 specifications

Operation Temperature 0°C...+60°C (commercial, all versions)
-20°C...+60°C (industrial, all versions)
-40°C...+85°C (extended, optional)

MTBF t.b.d.

Power Supply +5 V, +3.3 V

Current Consumption 50 mA @ 5 V
550 mA @ 3.3 V

Display Backlight Yes

BIOS Compatibility Standard VGA

PCI Bus Mini PCI bus


Operating Systems Drivers for Windows, Linux

Note: Chip supports only either VGA or LVDS. Concurrent operation is not supported.
Optional LVDS requires a BIOS change.

MPCI-VGA

Mini-PCI Module
Volari Z9M GPU

Block Diagram

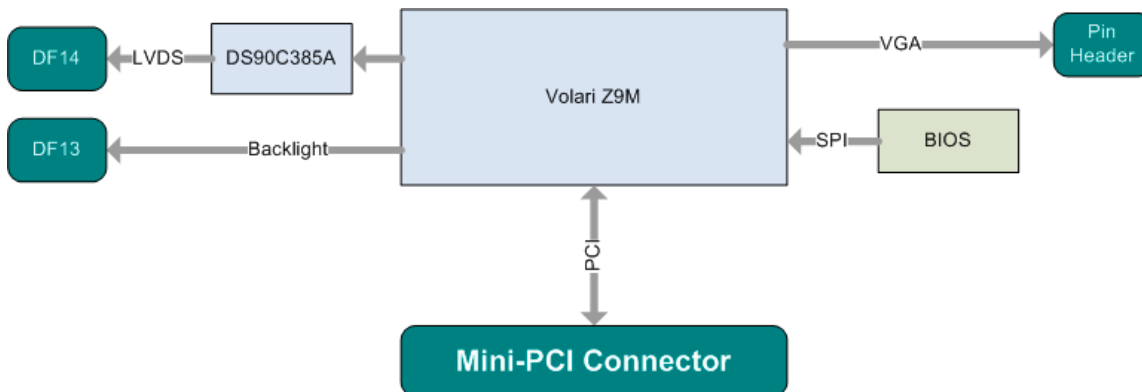

Ordering Information

Ordering Number	Description
706-0017-10	MPCI-VGA MiniPCI VGA board with XGI VOLARI Z9M, 8 MB RAM onboard, VGA output. Includes VGA adapter cable. Operating temp. range: -0°C ... +60°C
806-0017-10	MPCI-VGA MiniPCI VGA board with XGI VOLARI Z9M, 8 MB RAM onboard, VGA output. Includes VGA adapter cable. Operating temp. range: -20°C ... +60°C
906-0017-10	MPCI-VGA MiniPCI VGA board with XGI VOLARI Z9M, 8 MB RAM onboard, VGA output. Includes VGA adapter cable. Operating temp. range: -40°C ... +85°C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADLINK Technology:](#)

[MPCI-E-VGA](#) [MPCI-C-VGA](#) [MPCI-R-VGA](#)