

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0026481032

Status:

Active

Overview:

KK Interconnect Solutions

Description:

KK 396 Breakaway Header, Right-Angle, 3 Circuits, Tin (Sn) Plating

Documents:

- 3D Model

Packaging Specification PK-41662-001-001 (PDF)
- 3D Model (PDF)

Symbol Footprint Data SYM-26-48-1032-001 (PDF)
- Drawing (PDF)

RoHS Certificate of Compliance (PDF)
- Product Specification PS-08-50-001 (PDF)

Agency Certification

CSA

LR19980

UL

E29179

Application tooling part link

Application Tooling Part Link

11-20-0901

General

Product Family

PCB Headers

Series

41662

Application

Board-to-Board, Power, Wire-to-Board

Overview

KK Interconnect Solutions

Product Name

KK 396

UPC

800753760394

Physical

Breakaway

Yes

Circuits (Loaded)

3

Circuits (maximum)

3

Color - Resin

Black

Durability (mating cycles max)

25

First Mate / Last Break

No

Flammability

94V-0

Glow-Wire Capable

No

Guide to Mating Part

No

Keying to Mating Part

None

Lock to Mating Part

None

Material - Metal

Brass

Material - Plating Mating

Tin

Material - Resin

Polyester

Net Weight

1.096/g

Number of Rows

1

Orientation

Right Angle

PC Tail Length

4.67mm

PCB Locator

No

PCB Retention

None

PCB Thickness - Recommended

1.60mm

Packaging Type

Bag

Pitch - Mating Interface

3.96mm

Pitch - Termination Interface

3.96mm

Polarized to Mating Part

Yes

Polarized to PCB

No

Shrouded

Partial

Stackable


No

Temperature Range - Operating

See Product Specification

Termination Interface: Style

Through Hole

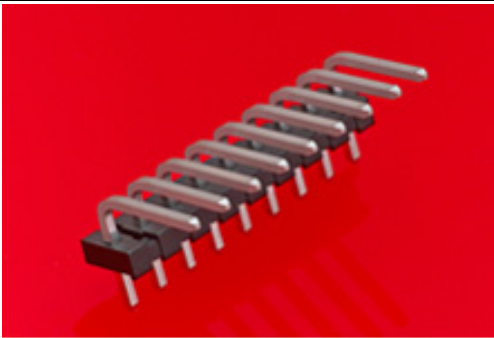

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[41662](#) Series

Mates With

[2139](#) KK Crimp Housing, [41695](#) KK Crimp Housing, [6442](#) KK Crimp Housing, [2145](#) PCB Connector, [41815](#) PCB Connector, [3069](#) KK Crimp Housing

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 7.0A |
| Voltage - Maximum             | 250V |

**Solder Process Data**

|                                                |      |
|------------------------------------------------|------|
| Duration at Max. Process Temperature (seconds) | 005  |
| Lead-freeProcess Capability                    | WAVE |
| Max. Cycles at Max. Process Temperature        | 001  |
| Process Temperature max. C                     | 235  |

**Material Info**

|                    |                 |
|--------------------|-----------------|
| Engineering Number | A-41662-B03A197 |
|--------------------|-----------------|

**Reference - Drawing Numbers**

|                         |                                    |
|-------------------------|------------------------------------|
| Packaging Specification | PK-41662-001-001                   |
| Product Specification   | PS-08-50-001                       |
| Sales Drawing           | SD-41662-001-001, SD-41662-001-002 |
| Symbol/Footprint Data   | SYM-26-48-1032-001                 |

This document was generated on 09/20/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[26-48-1032](#)