
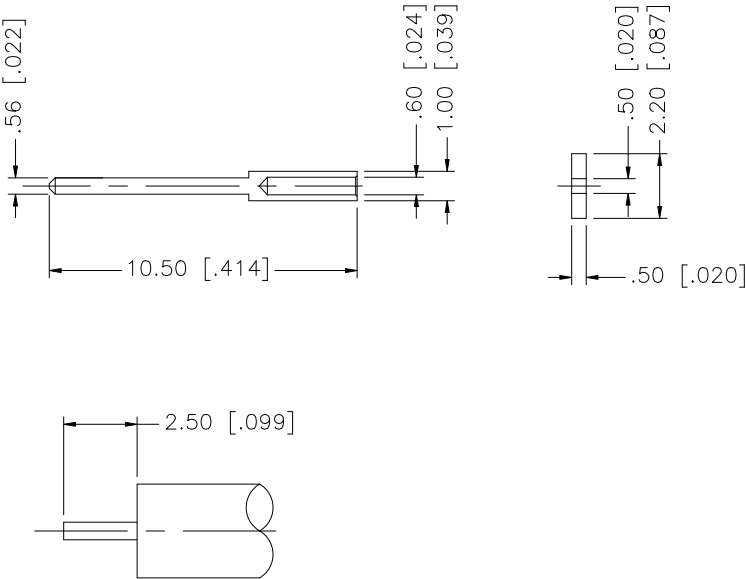


REV.	DATE	DESCRIPTION
A	12/09/03	UPDATE DRAWING FORMAT
B	07/08/07	ADD CABLE DESCRIPTION

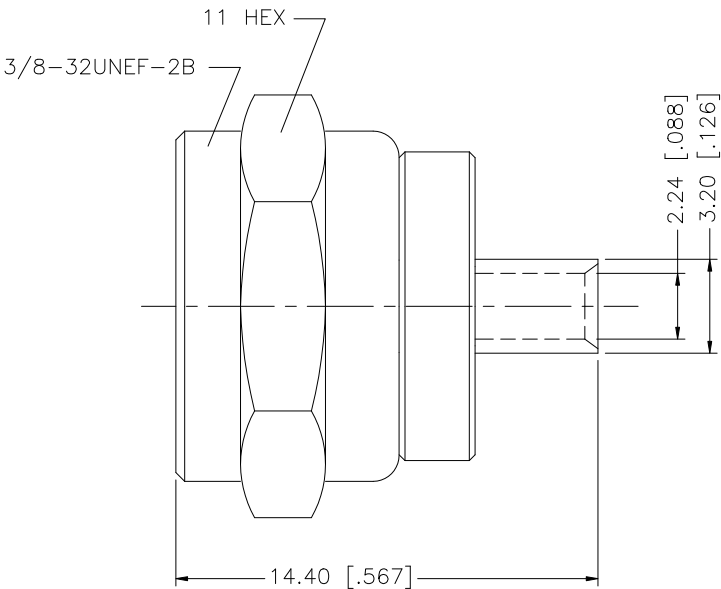

RECOMMENDED CABLE
STRIPPING DIM'S.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.					07/08/07			
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED						PART DESCRIPTION F DIRECT SOLDER PLUG (FOR .085” SEMI RIGID CABLE)			
6						ISSUED									
5					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1		PART NO. 222115						
4						CAD FILE							DWG. NO. 222115.DWG REV. B SIZE A SCALE NA		
3	CONTACT PIN	BRASS	BRT. TIN	1		C:/222/222115.DWG									
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	TIN–LEAD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[222115](#)