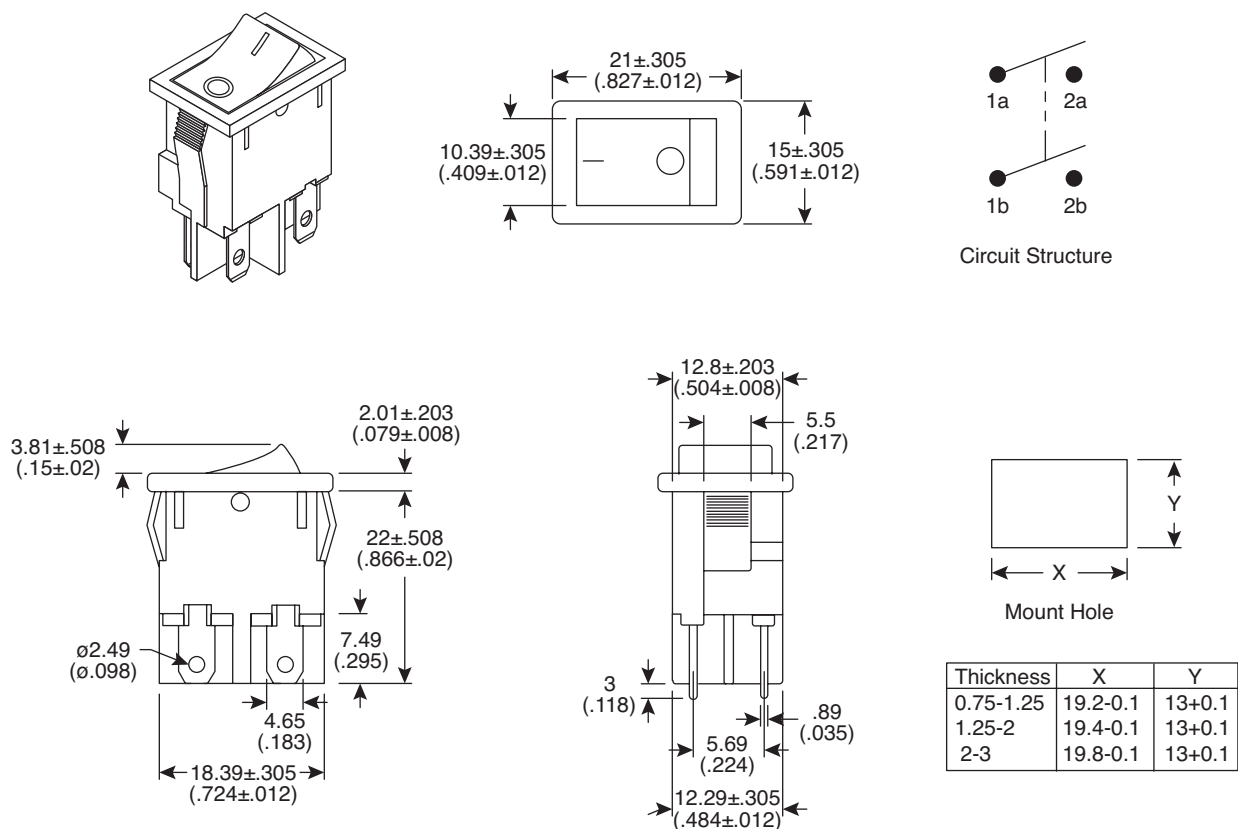


## Dimensions: mm (In)

**Mechanical Specifications:**

- Circuit: 4P, DPST, On-Off
- Temperature Range:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- Environmental Standard:  $5^{\circ}\text{C} \sim 35^{\circ}\text{C}$  and 40%~85% R.H. If there are problems related to judgement, the reference condition shall be  $25 \pm 2^{\circ}\text{C}$  and  $65 \pm 5\%$  R.H.
- Operating Force (application of load to the tip of button in operating direction):  $600 \pm 150\text{gf}$

**Note:**

- RoHS Compliant

**Electrical Specifications:**

- Rating: 6A/250VAC, 10A/125VAC
- Contact Resistance:  $30\text{m}\Omega$  max. / 5VDC 1A
- Insulation Resistance:  $100\text{M}\Omega$  min. / 500VDC
- Dielectric Strength: 1500VAC for 1 minute
- Surge Current (in use of capacitive load): 111A/250VAC, 1/240 sec.

**Rocker Switch**  
103-R13-73A-EV

**Mountain**  
**Switch**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mountain Switch:](#)

[103-R13-73A-EV](#)