


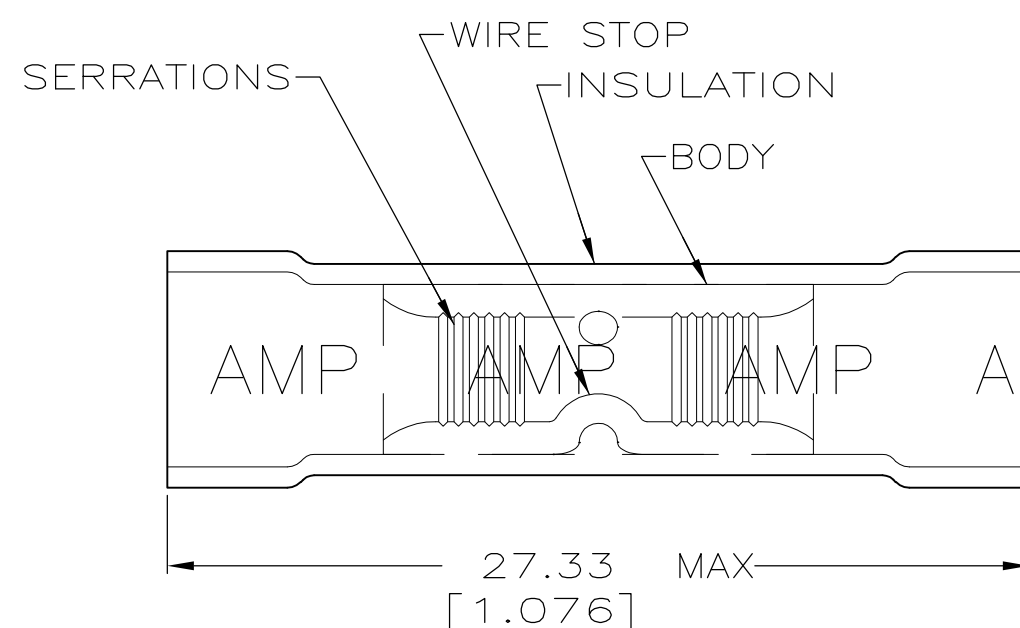




THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - FGF ALL RIGHTS RESERVED.		



LOC G	DIST 14	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			T2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

 WIRE RANGE	 E13288	 LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED



1. WIRE INSUL DIA,
2.67-3.56 [.105-.140]
-  PRELIMINARY - NOT FOR
PRODUCTION.

10,000	LOOSE PIECE, BULK	 34070-3
50	LOOSE PIECE, BAG	8-34070-5
5	LOOSE PIECE, BLS	8-34070-4
100	LOOSE PIECE, BOX	8-34070-1
2500	ON TAPE, REEL	1-34070-1
1000	LOOSE PIECE	34070
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 90° C [194° F]		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M ELLIS 19JUL95		 TE Connectivity				
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX 1000V (FIXTURES OR SIGNS)	DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	CHK C PRESNELL 19JUL95		NAME SPLICE, BUTT, PLASTI-GRIP WIRE SIZE, 22-16 AWG				
	FOR APPLICATION TOOLING INFORMATION		TOOLING ASSISTANCE CENTER 1-800-722-1111			APVD S BORTNER 19JUL95						
FOR ORDER ENTRY	1-800-526-5142	CIRCULAR MIL AREA: 0.26mm ² - 1.65mm ² [509-3260]	MATERIAL BODY, CU ASTM B 152 SLV, PVC, COLOR,RED	FINISH TIN PLATE PER MIL-T-10727	APPLICATION SPEC UL486A		WEIGHT -		SIZE A3	CAGE CODE 00779	DRAWING NO C-34070	RESTRICTED TO -
CUSTOMER DRAWING								SCALE 4:1	SHEET 1 OF 1	REV T2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[34067](#) [34070](#) [34071](#) [34072](#)