
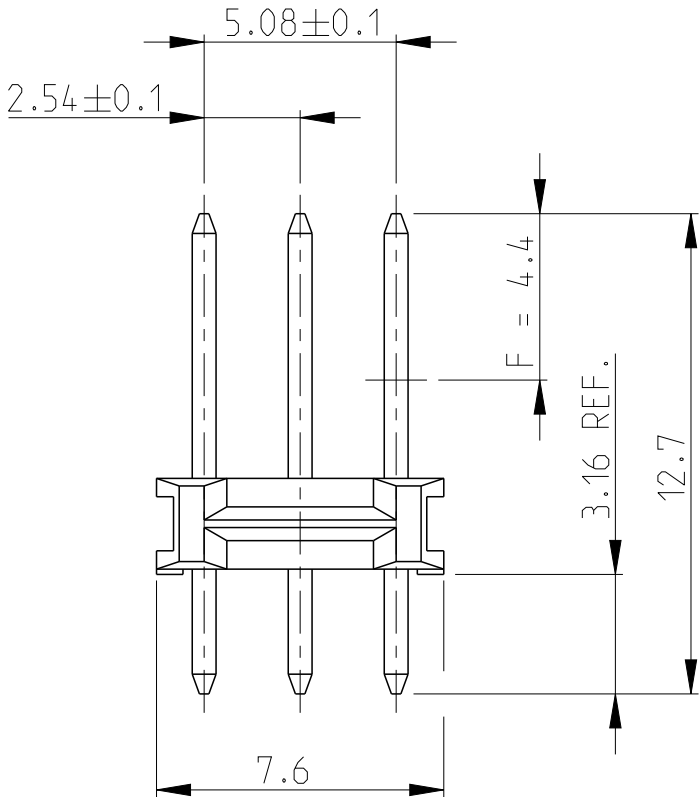


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
A1	-		C	CONTACT PIN MATERIAL AND PLATING CHANGE	18JUL2014	KJK JK

POS. PER ROW	L +0.3 -0.6	PART NUMBER	POS. PER ROW	L +0.3 -0.6	PART NUMBER
-	-	-	26	66.04	2-829 492-6
2	5.08	829 492-2	27	68.58	2-7
3	7.62	-3	28	71.12	2-8
4	10.16	-4	29	73.66	2-9
5	12.70	-5	30	76.20	3-0
6	15.24	-6	31	78.74	3-1
7	17.78	-7	32	81.28	3-2
8	20.32	-8	33	83.82	3-3
9	22.86	-9	34	86.36	3-4
10	25.40	1-0	35	88.90	3-5
11	27.94	1-1	36	91.44	3-6
12	30.48	1-2	37	93.98	3-7
13	33.02	1-3	38	96.52	3-8
14	35.56	1-4	39	99.06	3-9
15	38.10	1-5	40	101.60	4-0
16	40.64	1-6	41	104.14	4-1
17	43.18	1-7	42	106.68	4-2
18	45.72	1-8	43	109.22	4-3
19	48.26	1-9	44	111.76	4-4
20	50.80	2-0	45	114.30	4-5
21	53.34	2-1	46	116.84	4-6
22	55.88	2-2	47	119.38	4-7
23	58.42	2-3	48	121.92	4-8
24	60.96	2-4	49	124.46	4-9
25	63.50	2-829 492-5	50	127.00	5-829 492-0

OBSOLETE

OBSOLETE

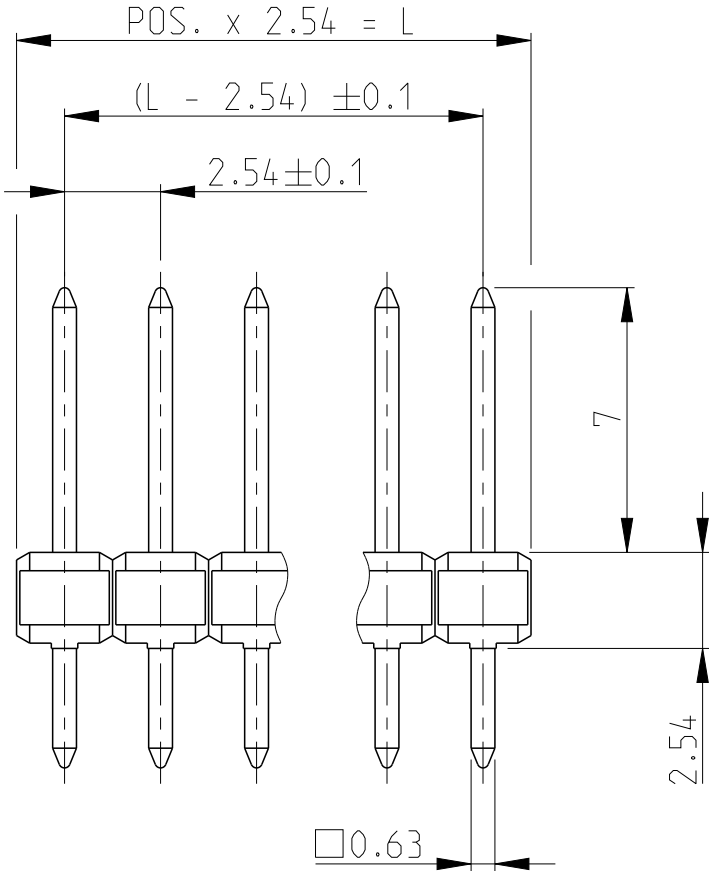


MATING SIDE: MIN. 0.7 µm PdNi + MIN. 0.1 µm GOLD FLASH BY AREA "F" OVER 1.27 µm NICKEL
SOLDER SIDE: MIN. 3.0 µm TIN OVER 1.27 µm NICKEL



OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



OBSOLETE

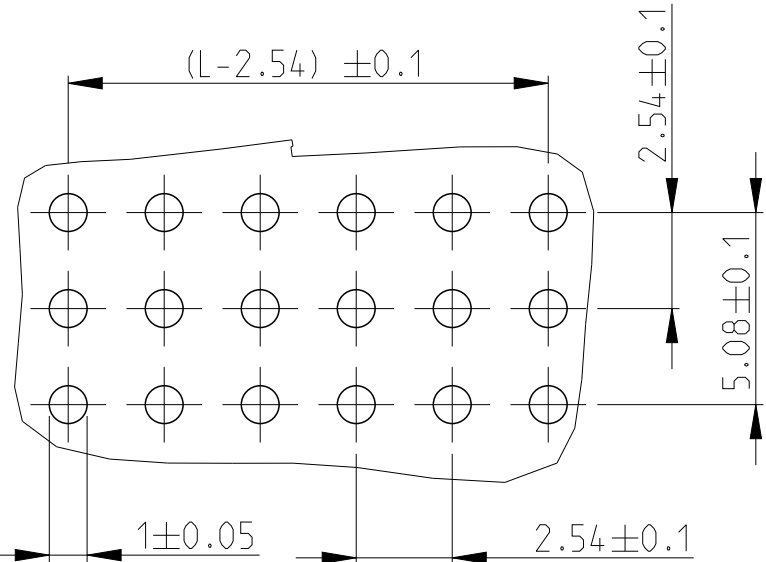

PC BOARD LAYOUT
LEITERPLATTEN-
ANSCHLUSSBILD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN F.MUELLER 06NOV1989	TE Connectivity AMPMODU II PIN HEADER TRIPLE ROW				
DIMENSIONS: mm		CHK M.SCHAARSCHMIDT 06NOV1989					
		APVD -					
		PRODUCT SPEC 108-18012					
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2mm		APPLICATION SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO C-829492	RESTRICTED TO -	
MATERIAL SEE TABLE		FINISH SEE TABLE	WEIGHT -	CUSTOMER DRAWING			SCALE 5:1
				SHEET 1	OF 1	REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[829492-8](#)