

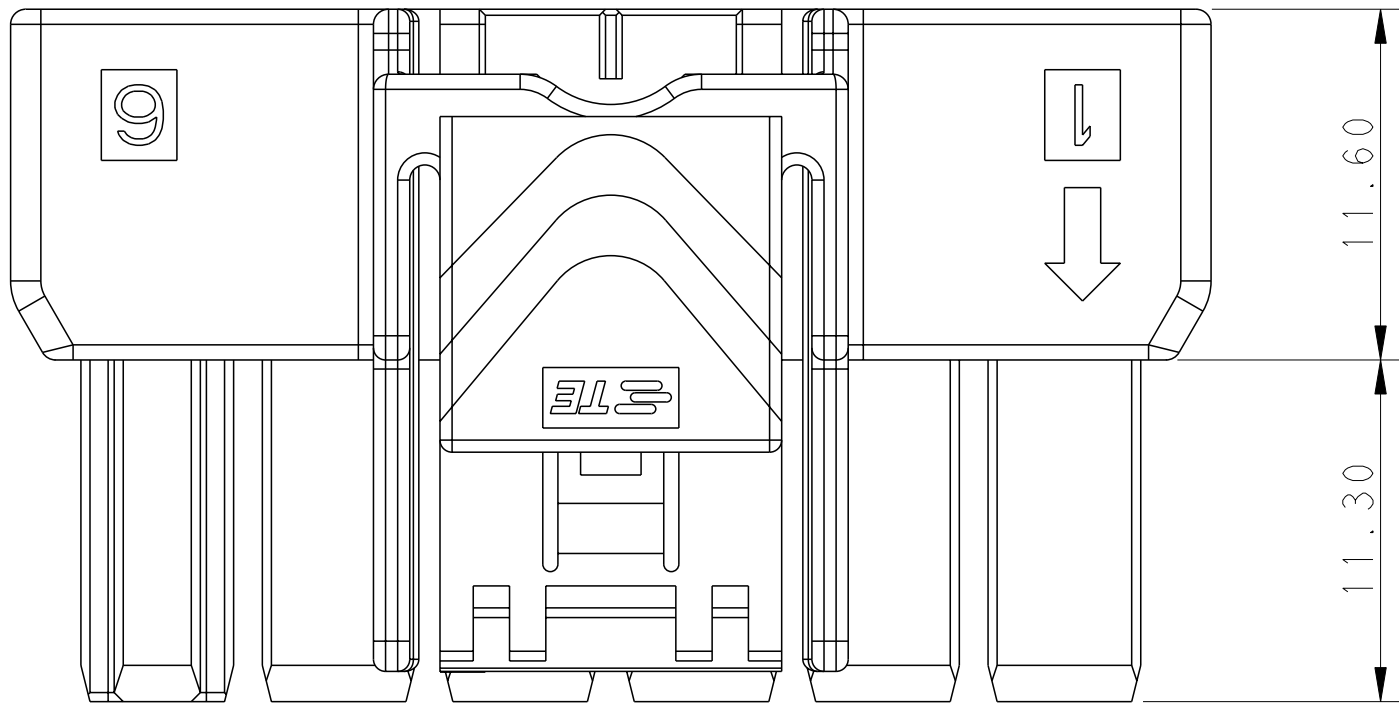
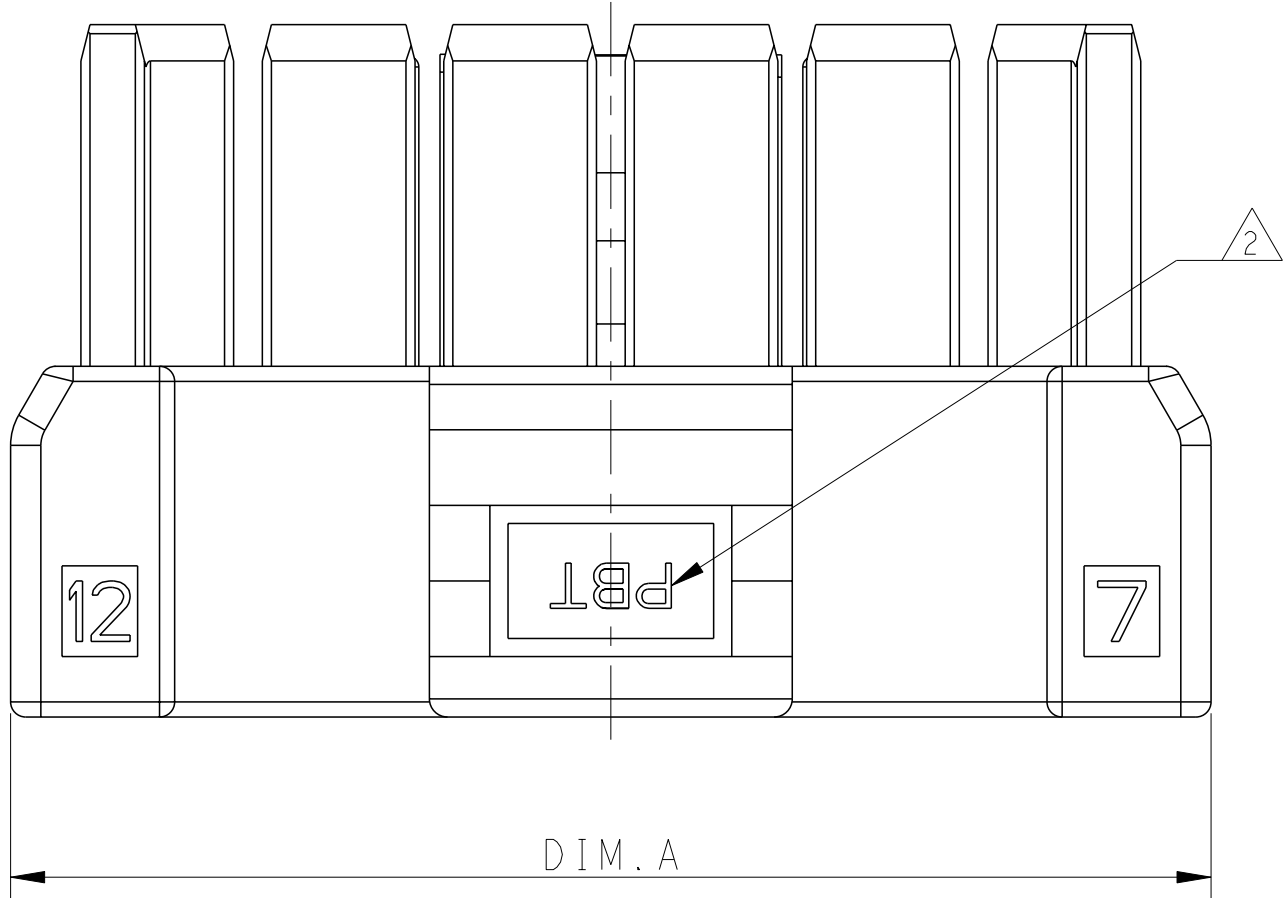
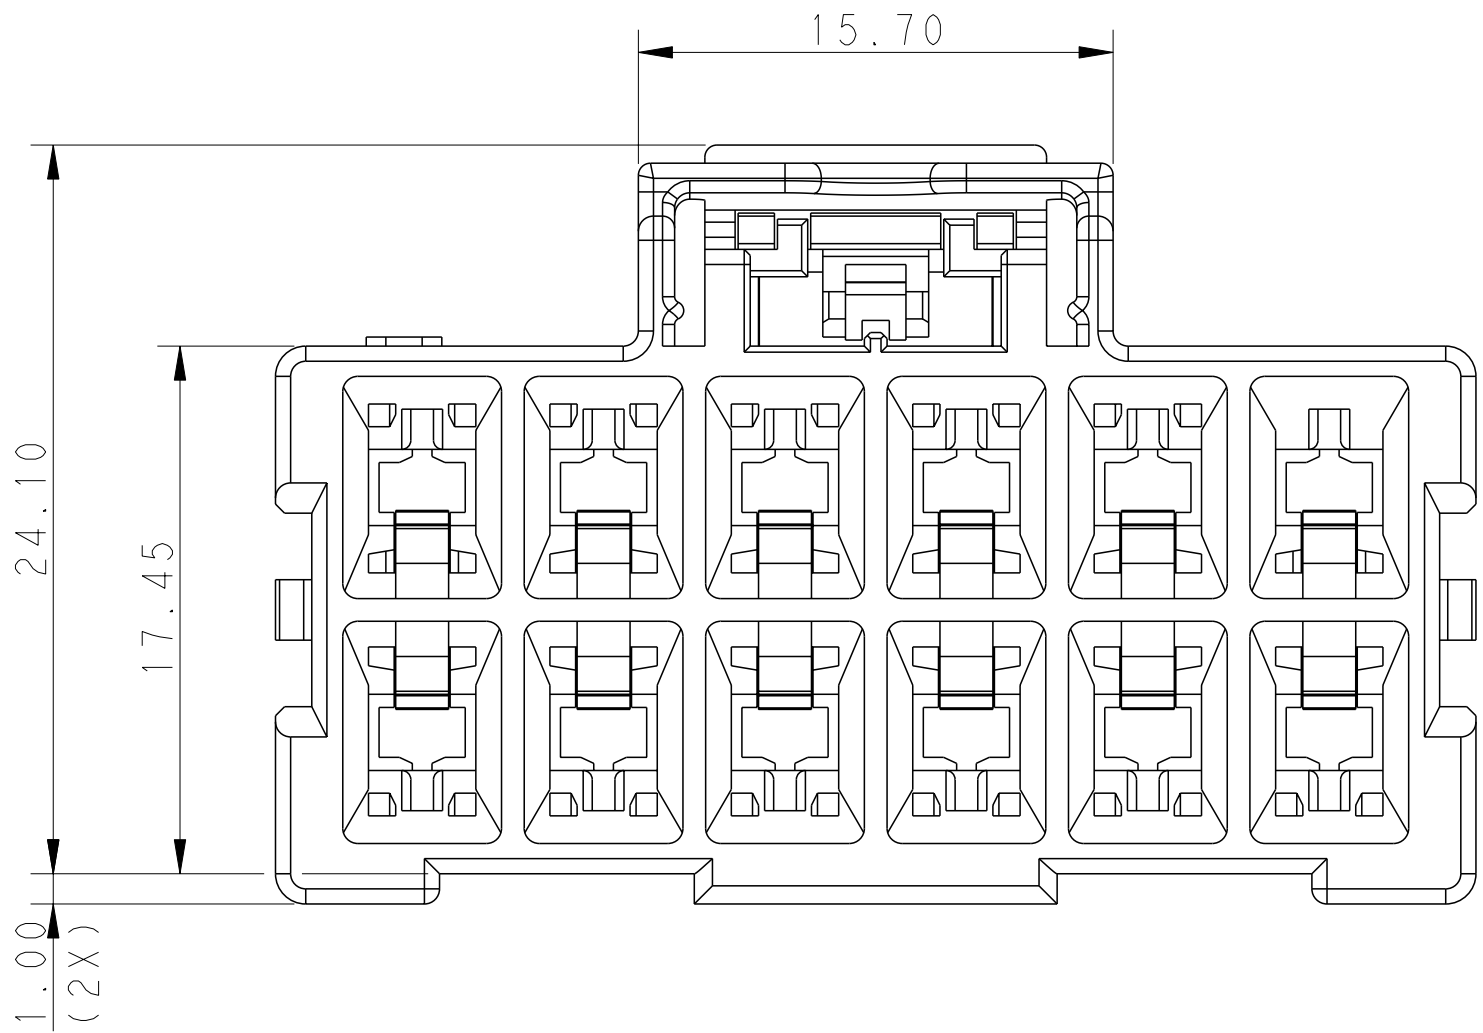


LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
		D		REVISED PER ECO-16-009784	30 JUN 16	RS	GJ

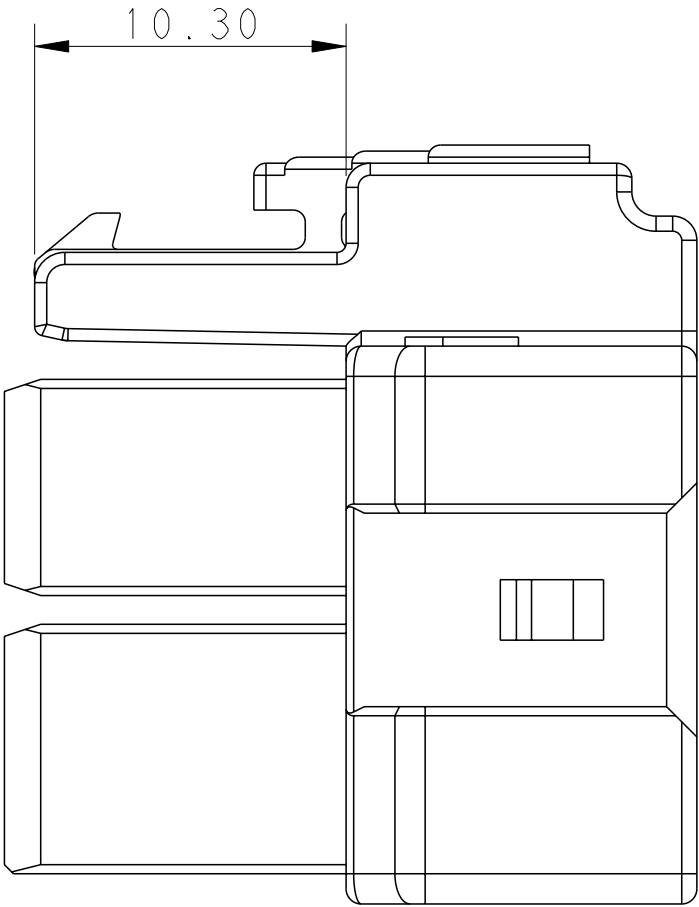

POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

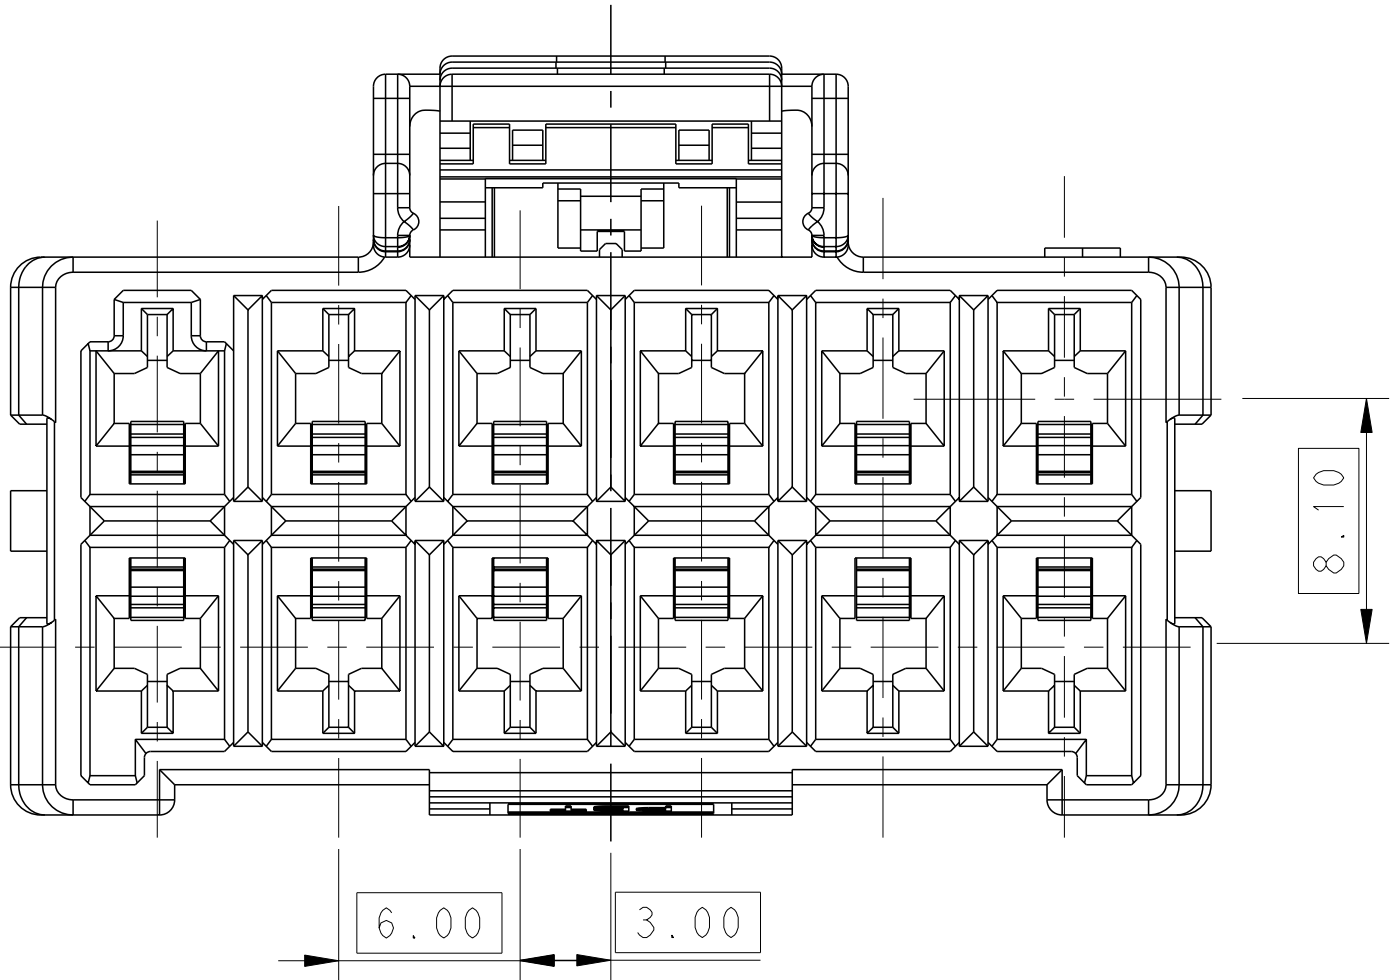

- 1

MATERIAL:
LEVEL 1:PBT,STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2:NYLON,HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- 2

MATERIAL MARK:
LEVEL 1:PBT,LEVEL 2:HDT
- 3

APPLICABLE CONTACT P/N
RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*, 2238066-*
- 4

MATING CONN, P/N
CAP HSG: *-1971774/5-
TPA (LOCKING PLATE): *-1971778-*

5 This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	TE Connectivity PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK	
DIMENSIONS:		CHK HAPYE WU 09JUL2012		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD YUHONG MAO 09JUL2012		
mm		PRODUCT SPEC		
0 PLC ±0.35		108-106118	SIZE CAGE CODE DRAWING NO	
1 PLC ±0.25		APPLICATION SPEC	RESTRICTED TO	
2 PLC ±0.25		114-106118	A100779C=1971776	
3 PLC ±0.25		WEIGHT	SCALE 4:1	
4 PLC ±0.25		Customer Drawing	SHEET 1 OF 2	
ANGLES FINISH			REV D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1971776-6](#)