
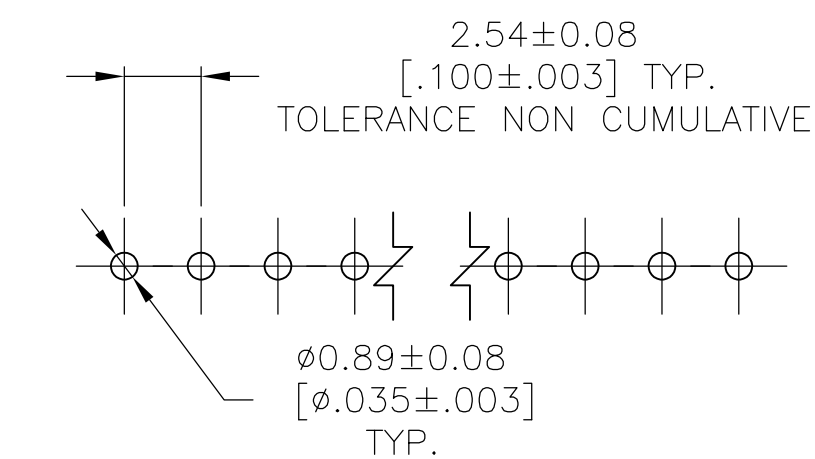
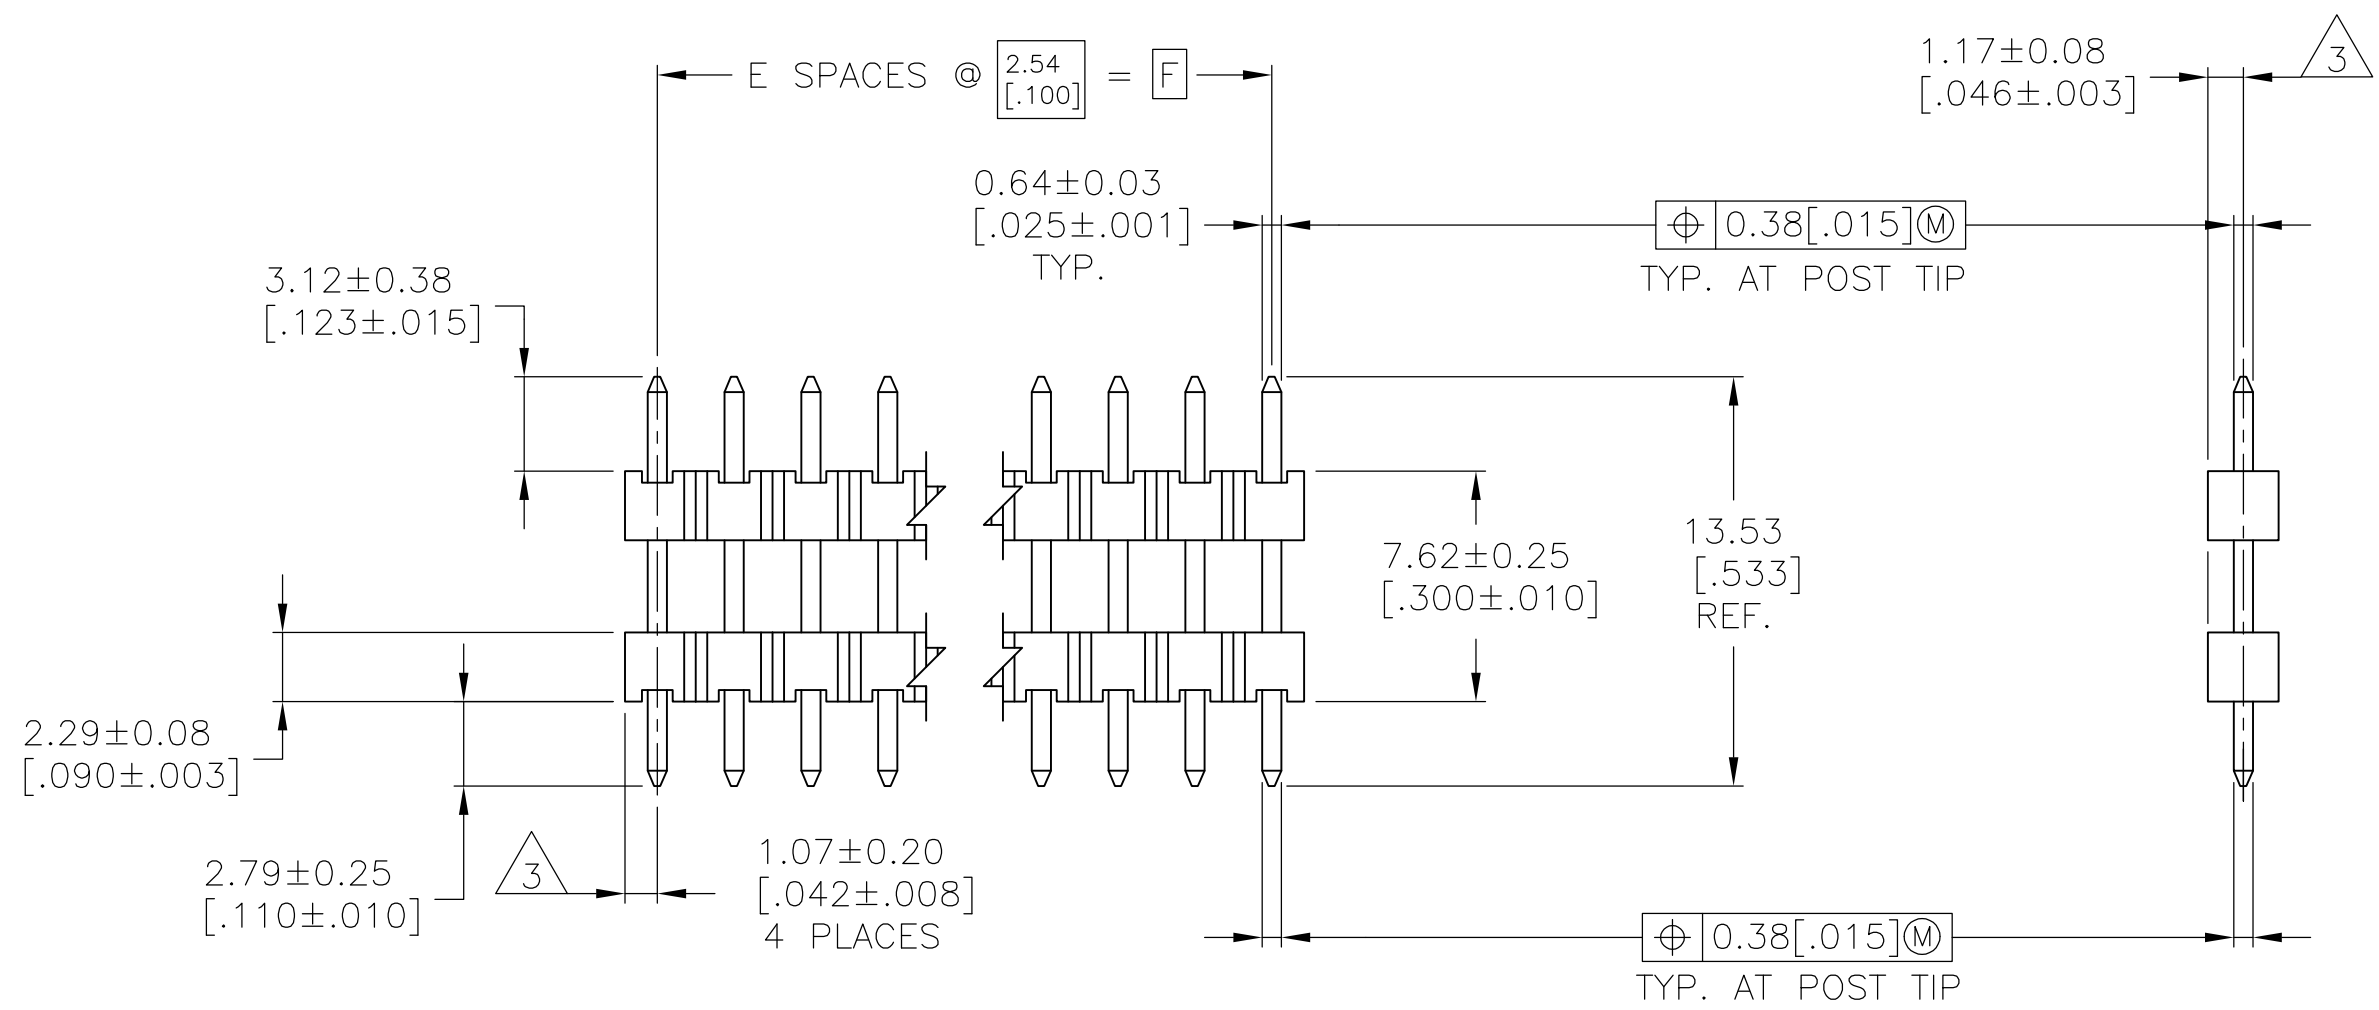
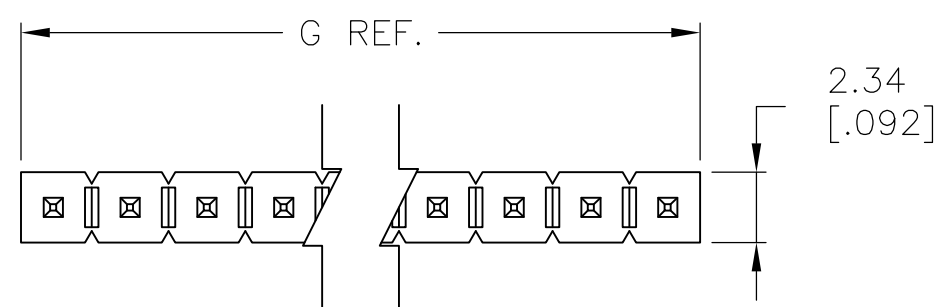




- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
POST: COPPER ALLOY
- 5 FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
OVER 0.00127 [.000050] NICKEL ENTIRE POST.
- 6 FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

	101.19 [3.984]	99.06 [3.900]	39	40	9-146458-0
	98.65 [3.884]	96.52 [3.800]	38	39	8-146458-9
	96.11 [3.784]	93.98 [3.700]	37	38	8-146458-8
	93.57 [3.684]	91.44 [3.600]	36	37	8-146458-7
	91.03 [3.584]	88.90 [3.500]	35	36	8-146458-6
	88.49 [3.484]	86.36 [3.400]	34	35	8-146458-5
	85.95 [3.384]	83.82 [3.300]	33	34	8-146458-4
	83.41 [3.284]	81.28 [3.200]	32	33	8-146458-3
	80.87 [3.184]	78.74 [3.100]	31	32	8-146458-2
	78.33 [3.084]	76.20 [3.000]	30	31	8-146458-1
	75.79 [2.984]	73.66 [2.900]	29	30	8-146458-0
	73.25 [2.884]	71.12 [2.800]	28	29	7-146458-9
	70.71 [2.784]	68.58 [2.700]	27	28	7-146458-8
	68.17 [2.684]	66.04 [2.600]	26	27	7-146458-7
	65.63 [2.584]	63.50 [2.500]	25	26	7-146458-6
	63.09 [2.484]	60.96 [2.400]	24	25	7-146458-5
	60.55 [2.384]	58.42 [2.300]	23	24	7-146458-4
	58.01 [2.284]	55.88 [2.200]	22	23	7-146458-3
	55.47 [2.184]	53.34 [2.100]	21	22	7-146458-2
	52.93 [2.084]	50.80 [2.000]	20	21	7-146458-1
	50.39 [1.984]	48.26 [1.900]	19	20	7-146458-0
	47.85 [1.884]	45.72 [1.800]	18	19	6-146458-9
	45.31 [1.784]	43.18 [1.700]	17	18	6-146458-8
	42.77 [1.684]	40.64 [1.600]	16	17	6-146458-7
	40.23 [1.584]	38.10 [1.500]	15	16	6-146458-6
	37.69 [1.484]	35.56 [1.400]	14	15	6-146458-5
	35.15 [1.384]	33.02 [1.300]	13	14	6-146458-4
	32.61 [1.284]	30.48 [1.200]	12	13	6-146458-3
	30.07 [1.184]	27.94 [1.100]	11	12	6-146458-2
	27.53 [1.084]	25.40 [1.000]	10	11	6-146458-1
	24.99 [.984]	22.86 [.900]	9	10	6-146458-0
	22.45 [.884]	20.32 [.800]	8	9	5-146458-9
	19.91 [.784]	17.78 [.700]	7	8	5-146458-8
	17.37 [.684]	15.24 [.600]	6	7	5-146458-7
	14.83 [.584]	12.70 [.500]	5	6	5-146458-6
	12.29 [.484]	10.16 [.400]	4	5	5-146458-5
	9.75 [.384]	7.62 [.300]	3	4	5-146458-4
	7.21 [.284]	5.08 [.200]	2	3	5-146458-3
	4.67 [.184]	2.54 [.100]	1	2	5-146458-2
	2.13 [.084]	-	-	1	5-146458-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	101.19 [3.984]	99.06 [3.900]	39	40	4-146458-0
5	98.65 [3.884]	96.52 [3.800]	38	39	3-146458-9
5	96.11 [3.784]	93.98 [3.700]	37	38	3-146458-8
5	93.57 [3.684]	91.44 [3.600]	36	37	3-146458-7
5	91.03 [3.584]	88.90 [3.500]	35	36	3-146458-6
5	88.49 [3.484]	86.36 [3.400]	34	35	3-146458-5
5	85.95 [3.384]	83.82 [3.300]	33	34	3-146458-4
5	83.41 [3.284]	81.28 [3.200]	32	33	3-146458-3
5	80.87 [3.184]	78.74 [3.100]	31	32	3-146458-2
5	78.33 [3.084]	76.20 [3.000]	30	31	3-146458-1
5	75.79 [2.984]	73.66 [2.900]	29	30	3-146458-0
5	73.25 [2.884]	71.12 [2.800]	28	29	2-146458-9
5	70.71 [2.784]	68.58 [2.700]	27	28	2-146458-8
5	68.17 [2.684]	66.04 [2.600]	26	27	2-146458-7
5	65.63 [2.584]	63.50 [2.500]	25	26	2-146458-6
5	63.09 [2.484]	60.96 [2.400]	24	25	2-146458-5
5	60.55 [2.384]	58.42 [2.300]	23	24	2-146458-4
5	58.01 [2.284]	55.88 [2.200]	22	23	2-146458-3
5	55.47 [2.184]	53.34 [2.100]	21	22	2-146458-2
5	52.93 [2.084]	50.80 [2.000]	20	21	2-146458-1
5	50.39 [1.984]	48.26 [1.900]	19	20	2-146458-0
5	47.85 [1.884]	45.72 [1.800]	18	19	1-146458-9
5	45.31 [1.784]	43.18 [1.700]	17	18	1-146458-8
5	42.77 [1.684]	40.64 [1.600]	16	17	1-146458-7
5	40.23 [1.584]	38.10 [1.500]	15	16	1-146458-6
5	37.69 [1.484]	35.56 [1.400]	14	15	1-146458-5
5	35.15 [1.384]	33.02 [1.300]	13	14	1-146458-4
5	32.61 [1.284]	30.48 [1.200]	12	13	1-146458-3
5	30.07 [1.184]	27.94 [1.100]	11	12	1-146458-2
5	27.53 [1.084]	25.40 [1.000]	10	11	1-146458-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146458-0
5	22.45 [.884]	20.32 [.800]	8	9	146458-9
5	19.91 [.784]	17.78 [.700]	7	8	146458-8
5	17.37 [.684]	15.24 [.600]	6	7	146458-7
5	14.83 [.584]	12.70 [.500]	5	6	146458-6
5	12.29 [.484]	10.16 [.400]	4	5	146458-5
5	9.75 [.384]	7.62 [.300]	3	4	146458-4
5	7.21 [.284]	5.08 [.200]	2	3	146458-3
5	4.67 [.184]	2.54 [.100]	1	2	146458-2
5	2.13 [.084]	-	-	1	146458-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN. 1/16/96 T. HOFFMAN		 TE Connectivity	
DIMENSIONS:		CHK. 3/4/96 G. DUBNICKI			
mm [INCHES]		APVD 3/4/96 G. DUBNICKI		NAME	
		PRODUCT SPEC		HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED	
		APPLICATION SPEC			
		WEIGHT			
		CUSTOMER DRAWING			
MATERIAL		SIZE		CAGE CODE	DRAWING NO
		A1		00779	C146458
SEE TABLE		SCALE		4:1	SHEET 1 of 1
				REV	B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-146458-9](#)