


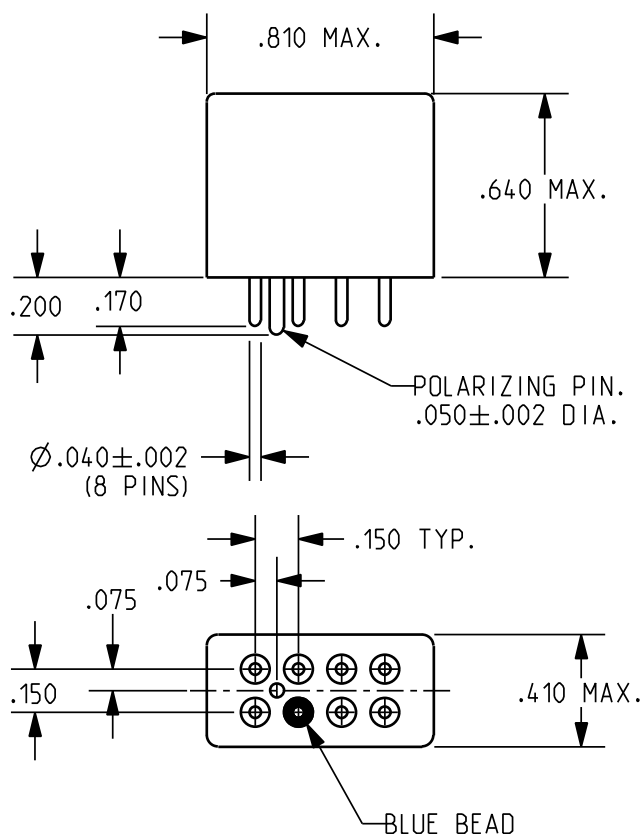


REV. C
DCO 300783

TOLERANCES $\pm .010"$ - UNLESS
OTHERWISE SPECIFIED

COIL: @ 25°C
 RESISTANCE 95 OHMS $\pm 10\%$
 NOMINAL VOLTAGE 12 VDC
 MUST OPERATE 6.5 VDC MAX.
TRANSIENT SUPPRESSION - 42 VDC MAX.
 MUST RELEASE 3.3 VDC MAX., 0.75 VDC MIN.

ENVIRONMENT:
 VIBRATION 70 Hz TO 3000 Hz @ 30 g's
 SHOCK 200 g's 6 MS. DURATION
 TEMPERATURE -70 °C TO +125 °C
 NOTES: OPERATE, RELEASE 5 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.
CONTACT BOUNCE 1 MS MAX.
CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

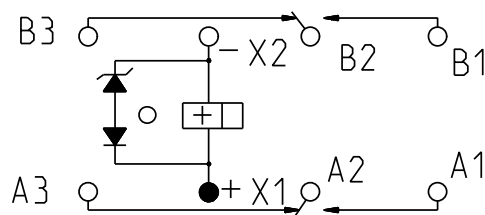

TERMINAL VIEW

CONTACT RATING: LOW LEVEL
TO 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.
100,000 OPERATIONS

DR. B.D. 12MAR2008

CK. J.M.B. 3/17/08

Tyco Electronics

©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. M83536/2-010M
 CUST. NO. REV.

TE NUMBER
 4-1617758-1

CII PART NUMBER
 FCB-205-0210M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCB-205-0210M](#)