
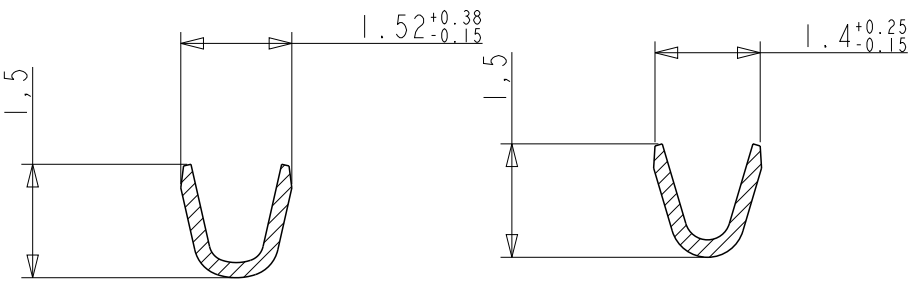
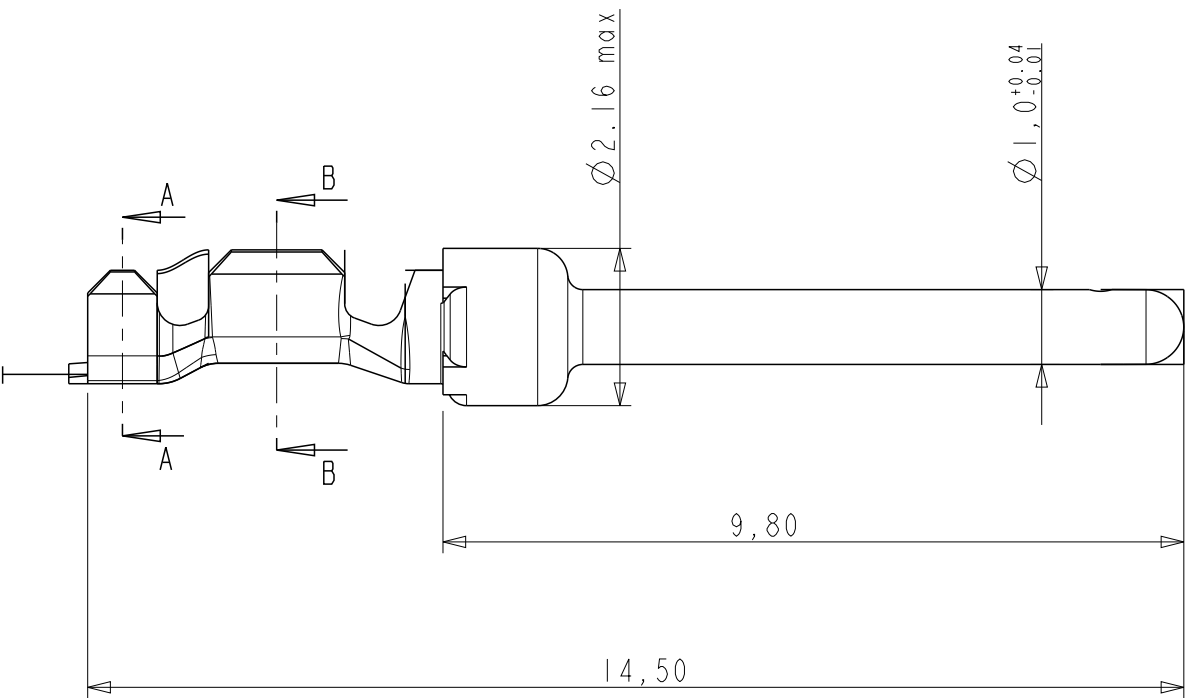


NOTES:
1-Material: Phosphor bronze,thickness 0.20
socket :Phosphor bronze
2-Finish on contact area:
- gold over nickel see table
finish on termination:bright tin lead over nickel
3-Wire range:20 to 28 AWG
4-Max outer dia of wire insulator:
-1.73 mm for contact #20-24
-1.02 mm for contact #24-28
5-Current carrying capacity per contact:
5.Amps max when crimped to #20 AWG
5 Amps max when crimped to #22 AWG
3 Amps max when crimped to #24 AWG
2 Amps max when crimped to #26 AWG
1 Amps max when crimped to #28 AWG
6-After 5 insertions into connector,
contact retention must be 5 pounds axial load min
7-When contact is crimped to 20 AWG,the insulation
support crimped height must be 1.78 mm max to ensure
a proper insertion into housing
6-Packaging:Reel


CORE RANGE	
86563003065LF	0.76μ Au/GXT
86563003065	0.76μ Au/GXT
86563003064LF	flash Au
86563003064	flash Au
PART NUMBER	Plating

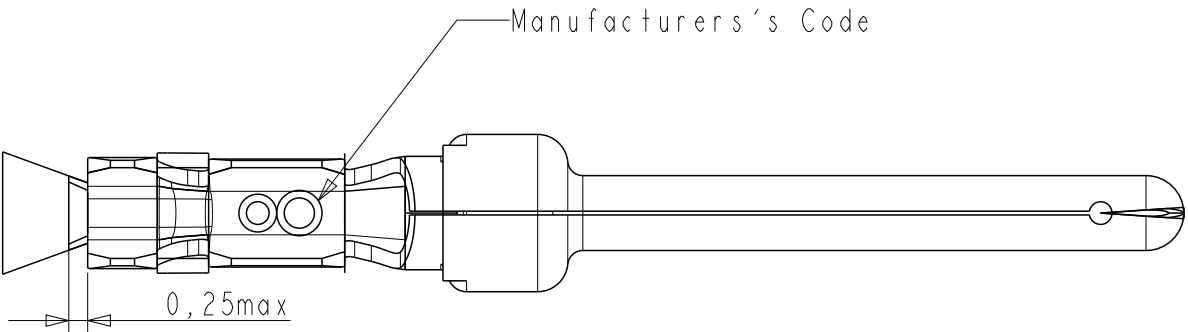

SECTION A-A
SECTION B-B
CROSS SECTIONS
FOR CT #24-28

NOTE : ROHS INFORMATIONS
The LF products meet European union directives and other
country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-920

rev	ecn no	dr	date
D	LS06-196	MPE	27/11/2006
E	LS08-0127	MPE	13/05/2008
F	111-0003	AMR	2011-01-06
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface - 		tolerance std ISO 1302 ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	-	18/04/03	ANGULAR		LINEAR	0.X	±0.3	size A3	Scale 5/1		
Eng	-	-				0.XX	±0.1				
Chr	-	-	0°	±2°		0.XXX	±0.05	ECN 111-0003			
Appr	-	-	Product family				-	Spec ref			
			title CRIMP PIN #Wire 24-28 Ø1.02				dwg no C01-8656-0425			Rev. F	
			catalog no				-	-			sheet 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86563003065LF](#) [86563003064LF](#)