


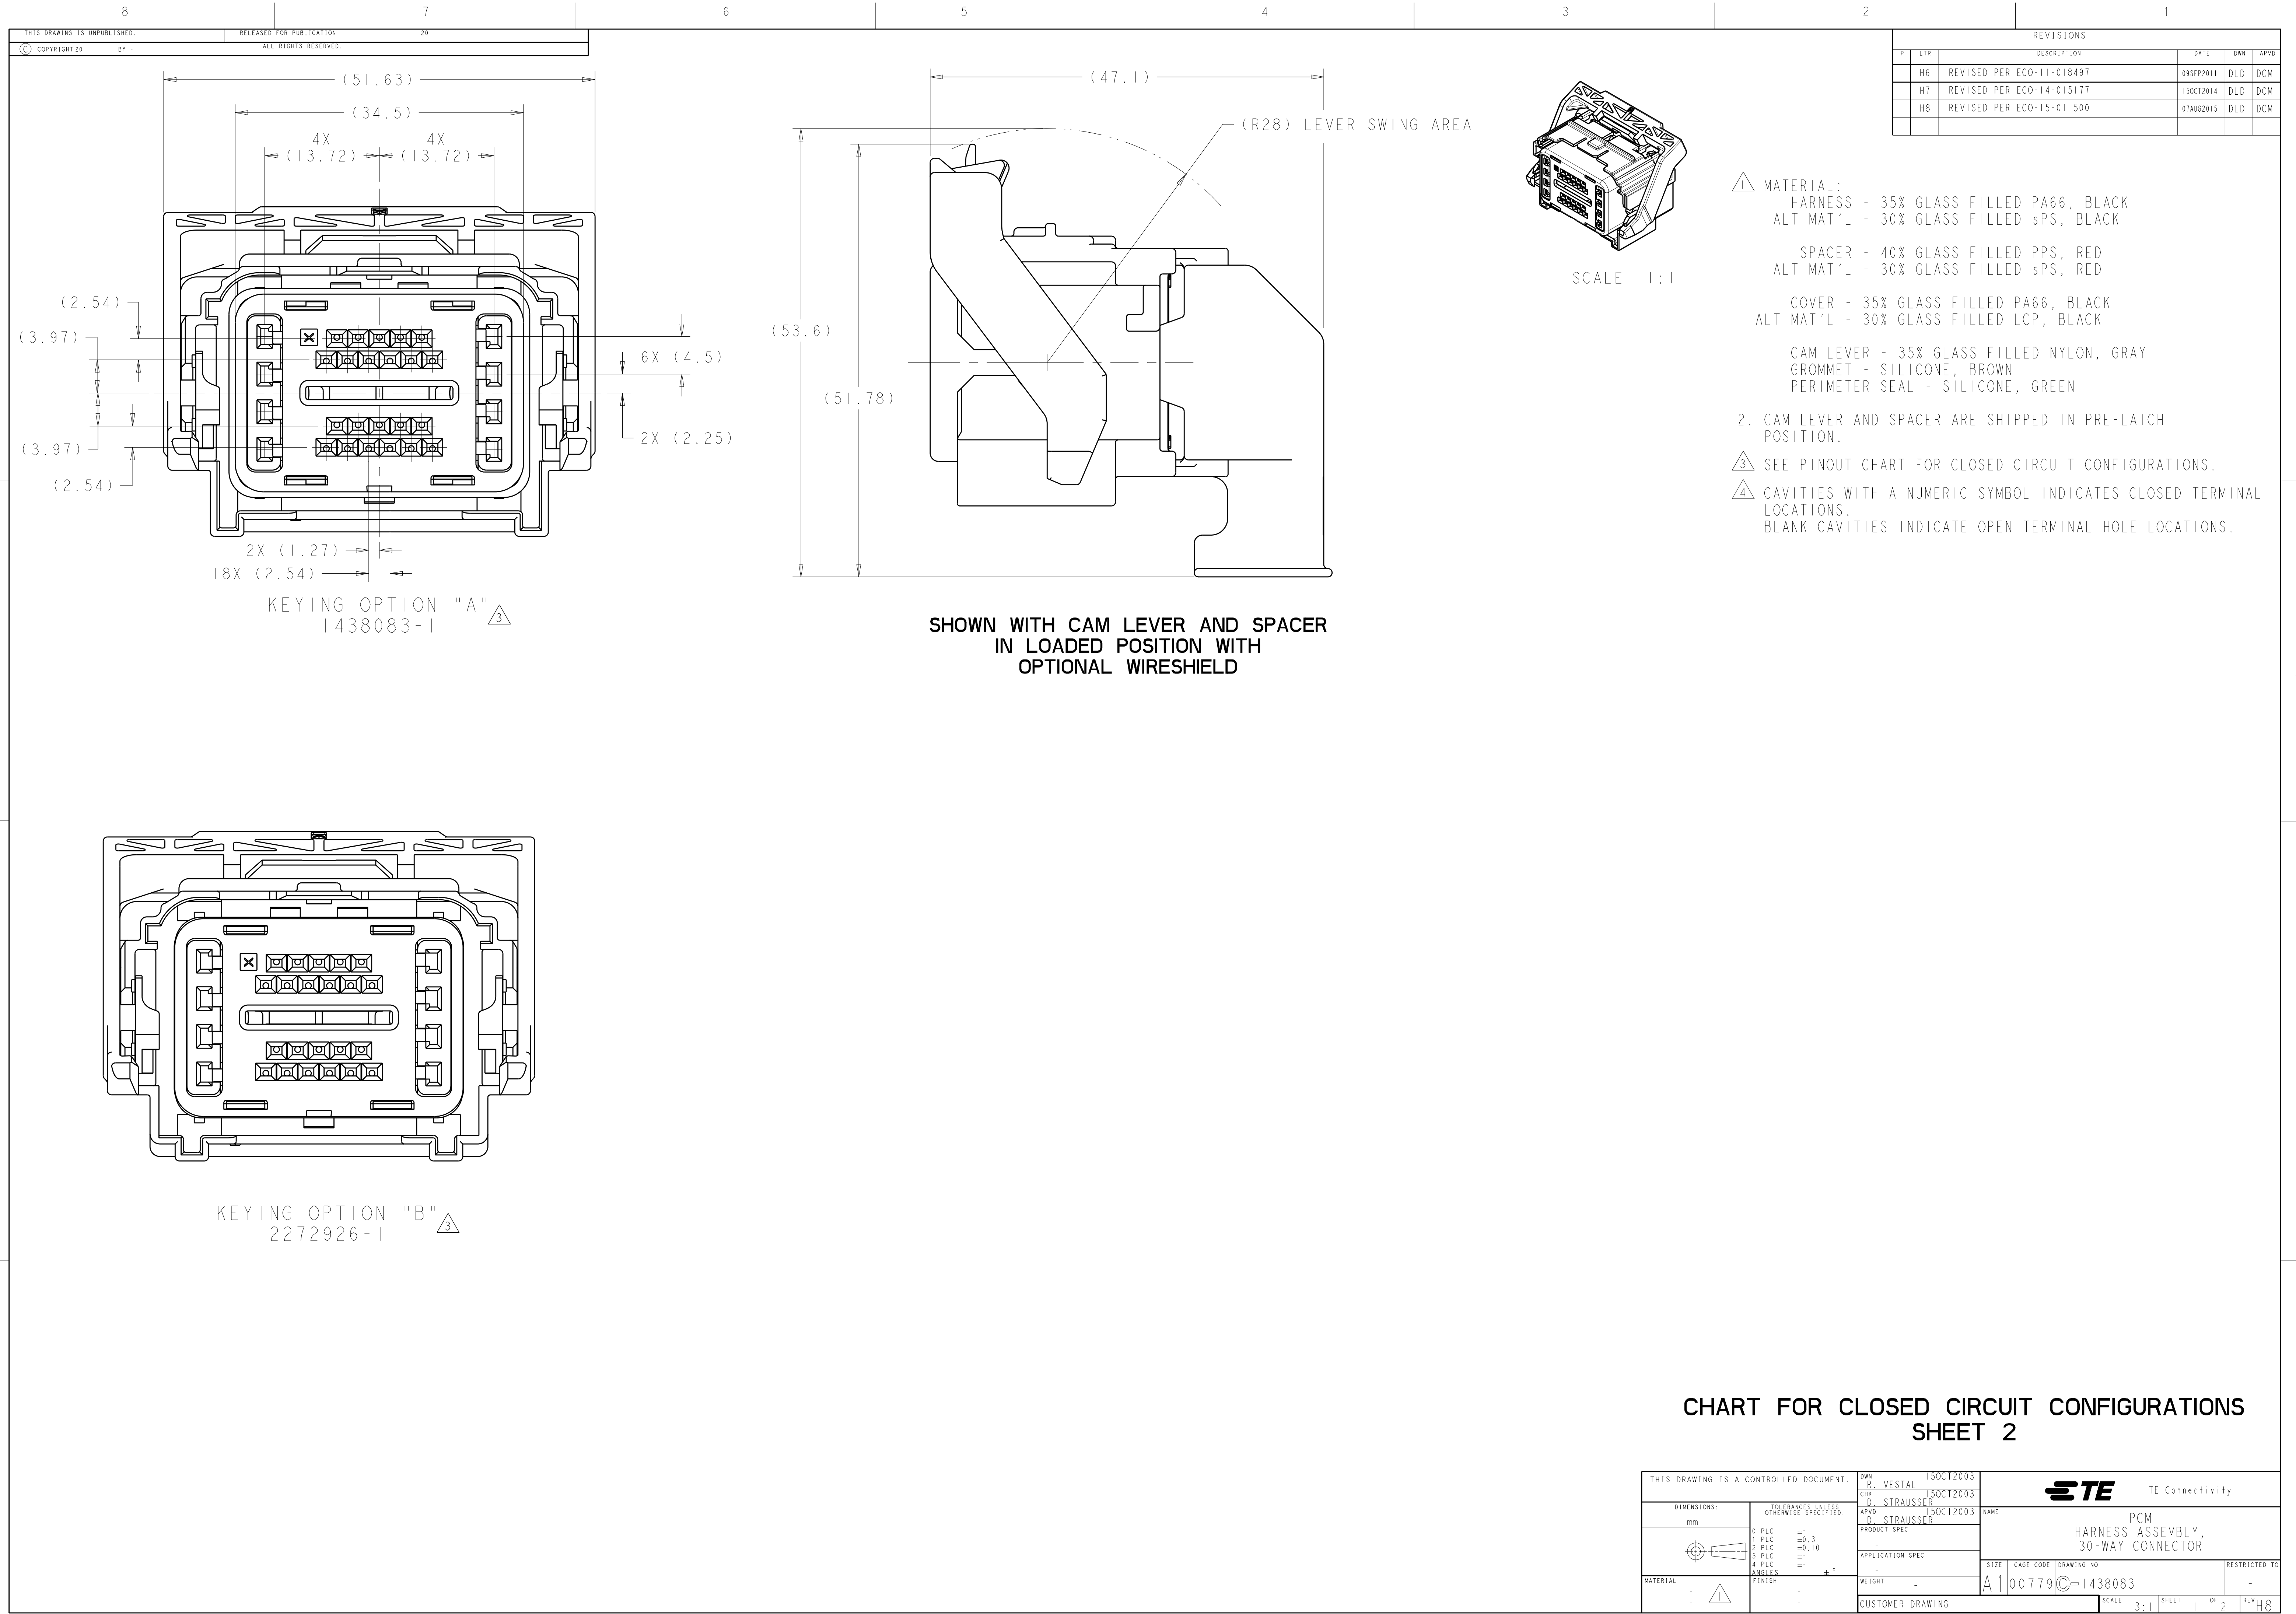

| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LYR | DESCRIPTION               | DATE      | DWN | APVD |
| H6        |     | REVISED PER ECO-11-018497 | 09SEP2011 | DLD | DCM  |
| H7        |     | REVISED PER ECO-14-015177 | 15OCT2014 | DLD | DCM  |
| H8        |     | REVISED PER ECO-15-011500 | 07AUG2015 | DLD | DCM  |
|           |     |                           |           |     |      |

- △ MATERIAL:
- HARNESS - 35% GLASS FILLED PA66, BLACK  
ALT MAT'L - 30% GLASS FILLED sPS, BLACK
- SPACER - 40% GLASS FILLED PPS, RED  
ALT MAT'L - 30% GLASS FILLED sPS, RED
- COVER - 35% GLASS FILLED PA66, BLACK  
ALT MAT'L - 30% GLASS FILLED LCP, BLACK
- CAM LEVER - 35% GLASS FILLED NYLON, GRAY  
GROMMET - SILICONE, BROWN  
PERIMETER SEAL - SILICONE, GREEN
2. CAM LEVER AND SPACER ARE SHIPPED IN PRE-LATCH POSITION.
- △ 3 SEE PINOUT CHART FOR CLOSED CIRCUIT CONFIGURATIONS.
- △ 4 CAVITIES WITH A NUMERIC SYMBOL INDICATES CLOSED TERMINAL LOCATIONS.  
BLANK CAVITIES INDICATE OPEN TERMINAL HOLE LOCATIONS.

CHART FOR CLOSED CIRCUIT CONFIGURATIONS  
SHEET 2

|                                        |  |                                                                                        |           |                               |  |
|----------------------------------------|--|----------------------------------------------------------------------------------------|-----------|-------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN<br>R. VESTAL                                                                       | 15OCT2003 | TE Connectivity               |  |
|                                        |  | CHK<br>D. STRAUSSER                                                                    | 15OCT2003 |                               |  |
| DIMENSIONS:                            |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:                                                 |           | NAME                          |  |
| mm                                     |  | 0 PLC ±.3<br>1 PLC ±0.3<br>2 PLC ±0.10<br>3 PLC ±.<br>4 PLC ±.<br>ANGLES ±1°<br>FINISH |           | PRODUCT SPEC                  |  |
|                                        |  |                                                                                        |           | APPLICATION SPEC              |  |
| MATERIAL                               |  | WEIGHT                                                                                 |           | SIZE                          |  |
| -                                      |  | -                                                                                      |           | A100779C=1438083              |  |
|                                        |  | CUSTOMER DRAWING                                                                       |           | RESTRICTED TO                 |  |
|                                        |  |                                                                                        |           | SCALE 3:1 SHEET 1 OF 2 REV H8 |  |

PIN-OUT CHART KEYING OPTION "B" PIN-OUT CHART KEYING OPTION "A" 4805 (3/13)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1438083-4](#)