


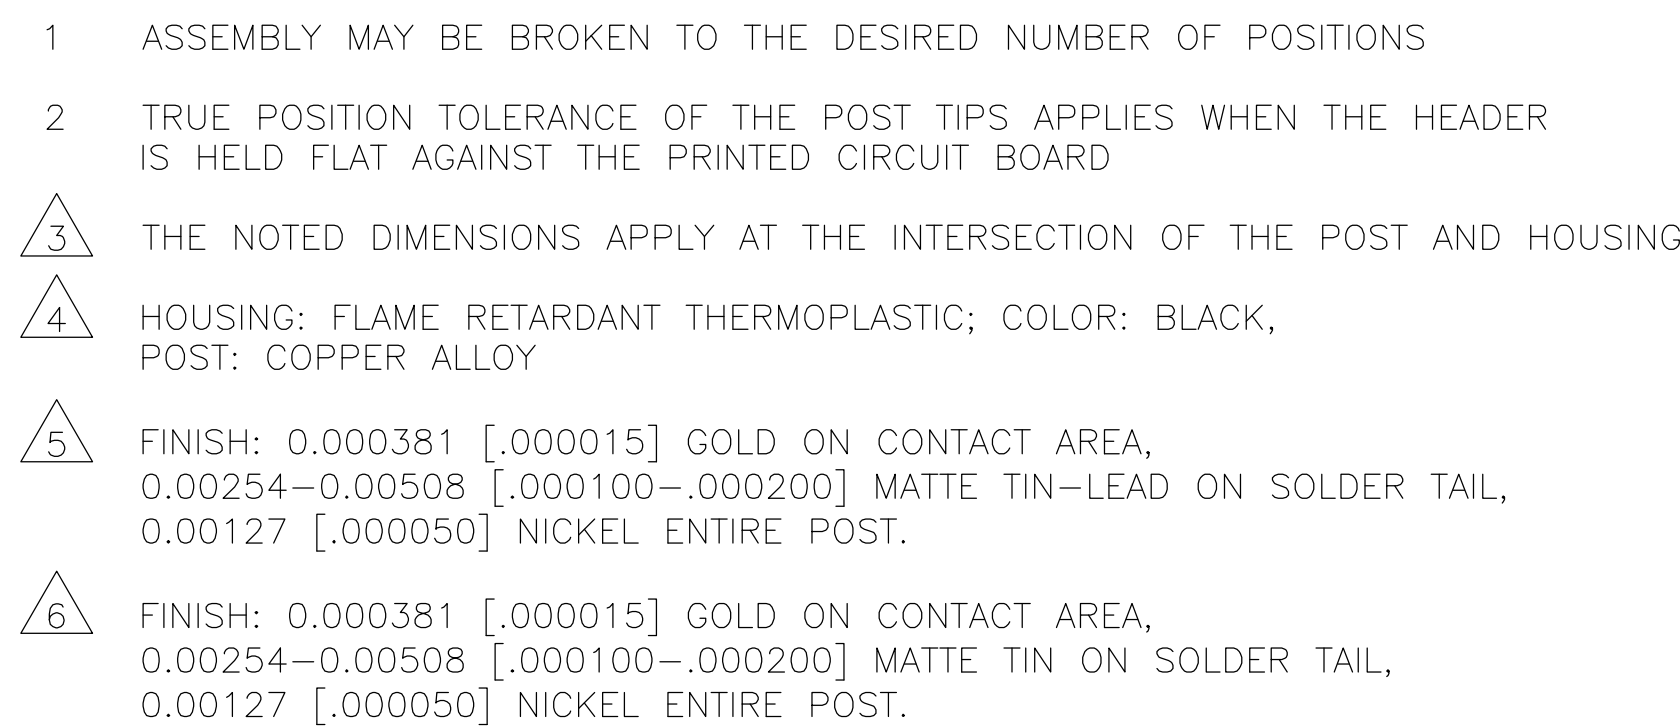

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG R BROWN 190CT2006		 TE Connectivity			
DIMENSIONS: mm [INCHES]				TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK J GSFORD 190CT2006		NAME	
						APRD J GSFORD 190CT2006			
				0 PL/C ± .02		HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED			
				.02 PL/C ± 0.12[.005]					
				2 PL/C ± .02		APPLICATION SPEC		SIZE	
				.02 PL/C ± .02				CAGE CODE	
MATERIAL 				ANGLES ± .				DRAWING NO	
								RESTRICTED TO	
FINISH SEE TABLE				WEIGHT —		A1 00779 C 146492			
CUSTOMER DRAWING						SCALE 4:1 SHEET 1 OF 2 REV B			

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOCAD

DIST00

REV

DATE

DWN

APVD

DESCRIPTION

SEE SHEET 1

△₆	101.19 [3.984]	99.06 [3.900]	39	80	9-146492-0
△₆	98.65 [3.884]	96.52 [3.800]	38	78	8-146492-9
△₆	96.11 [3.784]	93.98 [3.700]	37	76	8-146492-8
△₆	93.57 [3.684]	91.44 [3.600]	36	74	8-146492-7
△₆	91.03 [3.584]	88.90 [3.500]	35	72	8-146492-6
△₆	88.49 [3.484]	86.36 [3.400]	34	70	8-146492-5
△₆	85.95 [3.384]	83.82 [3.300]	33	68	8-146492-4
△₆	83.41 [3.284]	81.28 [3.200]	32	66	8-146492-3
△₆	80.87 [3.184]	78.74 [3.100]	31	64	8-146492-2
△₆	78.33 [3.084]	76.20 [3.000]	30	62	8-146492-1
△₆	75.79 [2.984]	73.66 [2.900]	29	60	8-146492-0
△₆	73.25 [2.884]	71.12 [2.800]	28	58	7-146492-9
△₆	70.71 [2.784]	68.58 [2.700]	27	56	7-146492-8
△₆	68.17 [2.684]	66.04 [2.600]	26	54	7-146492-7
△₆	65.63 [2.584]	63.50 [2.500]	25	52	7-146492-6
△₆	63.09 [2.484]	60.96 [2.400]	24	50	7-146492-5
△₆	60.55 [2.384]	58.42 [2.300]	23	48	7-146492-4
△₆	58.01 [2.284]	55.88 [2.200]	22	46	7-146492-3
△₆	55.47 [2.184]	53.34 [2.100]	21	44	7-146492-2
△₆	52.93 [2.084]	50.80 [2.000]	20	42	7-146492-1
△₆	50.39 [1.984]	48.26 [1.900]	19	40	7-146492-0
△₆	47.85 [1.884]	45.72 [1.800]	18	38	6-146492-9
△₆	45.31 [1.784]	43.18 [1.700]	17	36	6-146492-8
△₆	42.77 [1.684]	40.64 [1.600]	16	34	6-146492-7
△₆	40.23 [1.584]	38.10 [1.500]	15	32	6-146492-6
△₆	37.69 [1.484]	35.56 [1.400]	14	30	6-146492-5
△₆	35.15 [1.384]	33.02 [1.300]	13	28	6-146492-4
△₆	32.61 [1.284]	30.48 [1.200]	12	26	6-146492-3
△₆	30.07 [1.184]	27.94 [1.100]	11	24	6-146492-2
△₆	27.53 [1.084]	25.40 [1.000]	10	22	6-146492-1
△₆	24.99 [.984]	22.86 [.900]	9	20	6-146492-0
△₆	22.45 [.884]	20.32 [.800]	8	18	5-146492-9
△₆	19.91 [.784]	17.78 [.700]	7	16	5-146492-8
△₆	17.37 [.684]	15.24 [.600]	6	14	5-146492-7
△₆	14.83 [.584]	12.70 [.500]	5	12	5-146492-6
△₆	12.29 [.484]	10.16 [.400]	4	10	5-146492-5
△₆	9.75 [.384]	7.62 [.300]	3	8	5-146492-4
△₆	7.21 [.284]	5.08 [.200]	2	6	5-146492-3
△₆	4.67 [.184]	2.54 [.100]	1	4	5-146492-2
△₆	2.13 [.084]	-	-	2	5-146492-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

△₅	101.19 [3.984]	99.06 [3.900]	39	80	4-146492-0
△₅	98.65 [3.884]	96.52 [3.800]	38	78	3-146492-9
△₅	96.11 [3.784]	93.98 [3.700]	37	76	3-146492-8
△₅	93.57 [3.684]	91.44 [3.600]	36	74	3-146492-7
△₅	91.03 [3.584]	88.90 [3.500]	35	72	3-146492-6
△₅	88.49 [3.484]	86.36 [3.400]	34	70	3-146492-5
△₅	85.95 [3.384]	83.82 [3.300]	33	68	3-146492-4
△₅	83.41 [3.284]	81.28 [3.200]	32	66	3-146492-3
△₅	80.87 [3.184]	78.74 [3.100]	31	64	3-146492-2
△₅	78.33 [3.084]	76.20 [3.000]	30	62	3-146492-1
△₅	75.79 [2.984]	73.66 [2.900]	29	60	3-146492-0
△₅	73.25 [2.884]	71.12 [2.800]	28	58	2-146492-9
△₅	70.71 [2.784]	68.58 [2.700]	27	56	2-146492-8
△₅	68.17 [2.684]	66.04 [2.600]	26	54	2-146492-7
△₅	65.63 [2.584]	63.50 [2.500]	25	52	2-146492-6
△₅	63.09 [2.484]	60.96 [2.400]	24	50	2-146492-5
△₅	60.55 [2.384]	58.42 [2.300]	23	48	2-146492-4
△₅	58.01 [2.284]	55.88 [2.200]	22	46	2-146492-3
△₅	55.47 [2.184]	53.34 [2.100]	21	44	2-146492-2
△₅	52.93 [2.084]	50.80 [2.000]	20	42	2-146492-1
△₅	50.39 [1.984]	48.26 [1.900]	19	40	2-146492-0
△₅	47.85 [1.884]	45.72 [1.800]	18	38	1-146492-9
△₅	45.31 [1.784]	43.18 [1.700]	17	36	1-146492-8
△₅	42.77 [1.684]	40.64 [1.600]	16	34	1-146492-7
△₅	40.23 [1.584]	38.10 [1.500]	15	32	1-146492-6
△₅	37.69 [1.484]	35.56 [1.400]	14	30	1-146492-5
△₅	35.15 [1.384]	33.02 [1.300]	13	28	1-146492-4
△₅	32.61 [1.284]	30.48 [1.200]	12	26	1-146492-3
△₅	30.07 [1.184]	27.94 [1.100]	11	24	1-146492-2
△₅	27.53 [1.084]	25.40 [1.000]	10	22	1-146492-1
△₅	24.99 [.984]	22.86 [.900]	9	20	1-146492-0
△₅	22.45 [.884]	20.32 [.800]	8	18	146492-9
△₅	19.91 [.784]	17.78 [.700]	7	16	146492-8
△₅	17.37 [.684]	15.24 [.600]	6	14	146492-7
△₅	14.83 [.584]	12.70 [.500]	5	12	146492-6
△₅	12.29 [.484]	10.16 [.400]	4	10	146492-5
△₅	9.75 [.384]	7.62 [.300]	3	8	146492-4
△₅	7.21 [.284]	5.08 [.200]	2	6	146492-3
△₅	4.67 [.184]	2.54 [.100]	1	4	146492-2
△₅	2.13 [.084]	-	-	2	146492-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

± -

± 0.5[.02]

± 0.13[.005]

± -

± -

ANGLES

FINISH

SEE TABLE

4

DWN
R BROWN
19OCT2006

CHK
J GESFORD
19OCT2006

APVD
J GESFORD
19OCT2006

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

NAME

HEADER ASSEMBLY, MOD II,
STACKING, DOUBLE ROW,
.025 SQ.POST, UNSHROUDED

SIZE
A1

CAGE CODE
00779

DRAWING NO
146492

RESTRICTED TO

SCALE
4:1

SHEET
2

OF
2

REV
B

TE Connectivity

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-146492-6](#)