

FO connectors - VS-SCRJ-HCS-FA-IP67 - 1657012

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



SC-RJ fiber optic connector, IP67, duplex, with fast connection technology, for PCF fiber 200/230 µm, for individual wire diameter 2.9 mm, for cable cross section 5.0 mm ... 8.5 mm

RoHS

Ethernet

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 081375
GTIN	4046356081375

Technical data

Mechanical characteristics

Number of positions	2
Connection profile	SCRJ in acc. with IEC 61754-24
Fiber type	PCF fiber A3C
Ferrule diameter	2.50 mm
Insertion/withdrawal cycles	≥ 1000
External cable diameter	5 mm ... 8.5 mm
Cable outlet	straight
Color	gray
Wire diameter	2.9 mm
Degree of protection	IP67
Type	SCRJ
No. of cable outlets	1

Ambient conditions

Ambient temperature (operation)	-20 °C ... 70 °C
Degree of protection	IP67

Material data

Flammability rating according to UL 94	V0
--	----

FO connectors - VS-SCRJ-HCS-FA-IP67 - 1657012

Technical data

Material data

Housing material	PA
O-ring material	FPM
Cable seal material	NBR
Material housing intermediate seal	NBR
Ferrule material	Copper alloy
Ferrule holder color	red
Height	22.8 mm

Optical characteristics

Attenuation	≤ 1 dB (Insertion attenuation)
-------------	--------------------------------

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

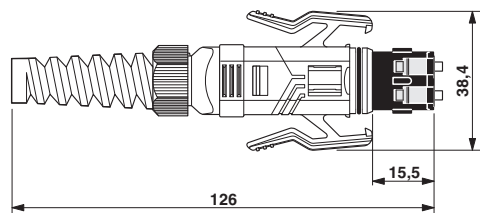

SC-RJ connector IP67

Approvals

Approvals

Approvals

UL Listed / EAC

Ex Approvals

Approval details

FO connectors - VS-SCRJ-HCS-FA-IP67 - 1657012

Approvals

UL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> E308814-20070105

EAC



B.01742

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>