



4805 (3/11)

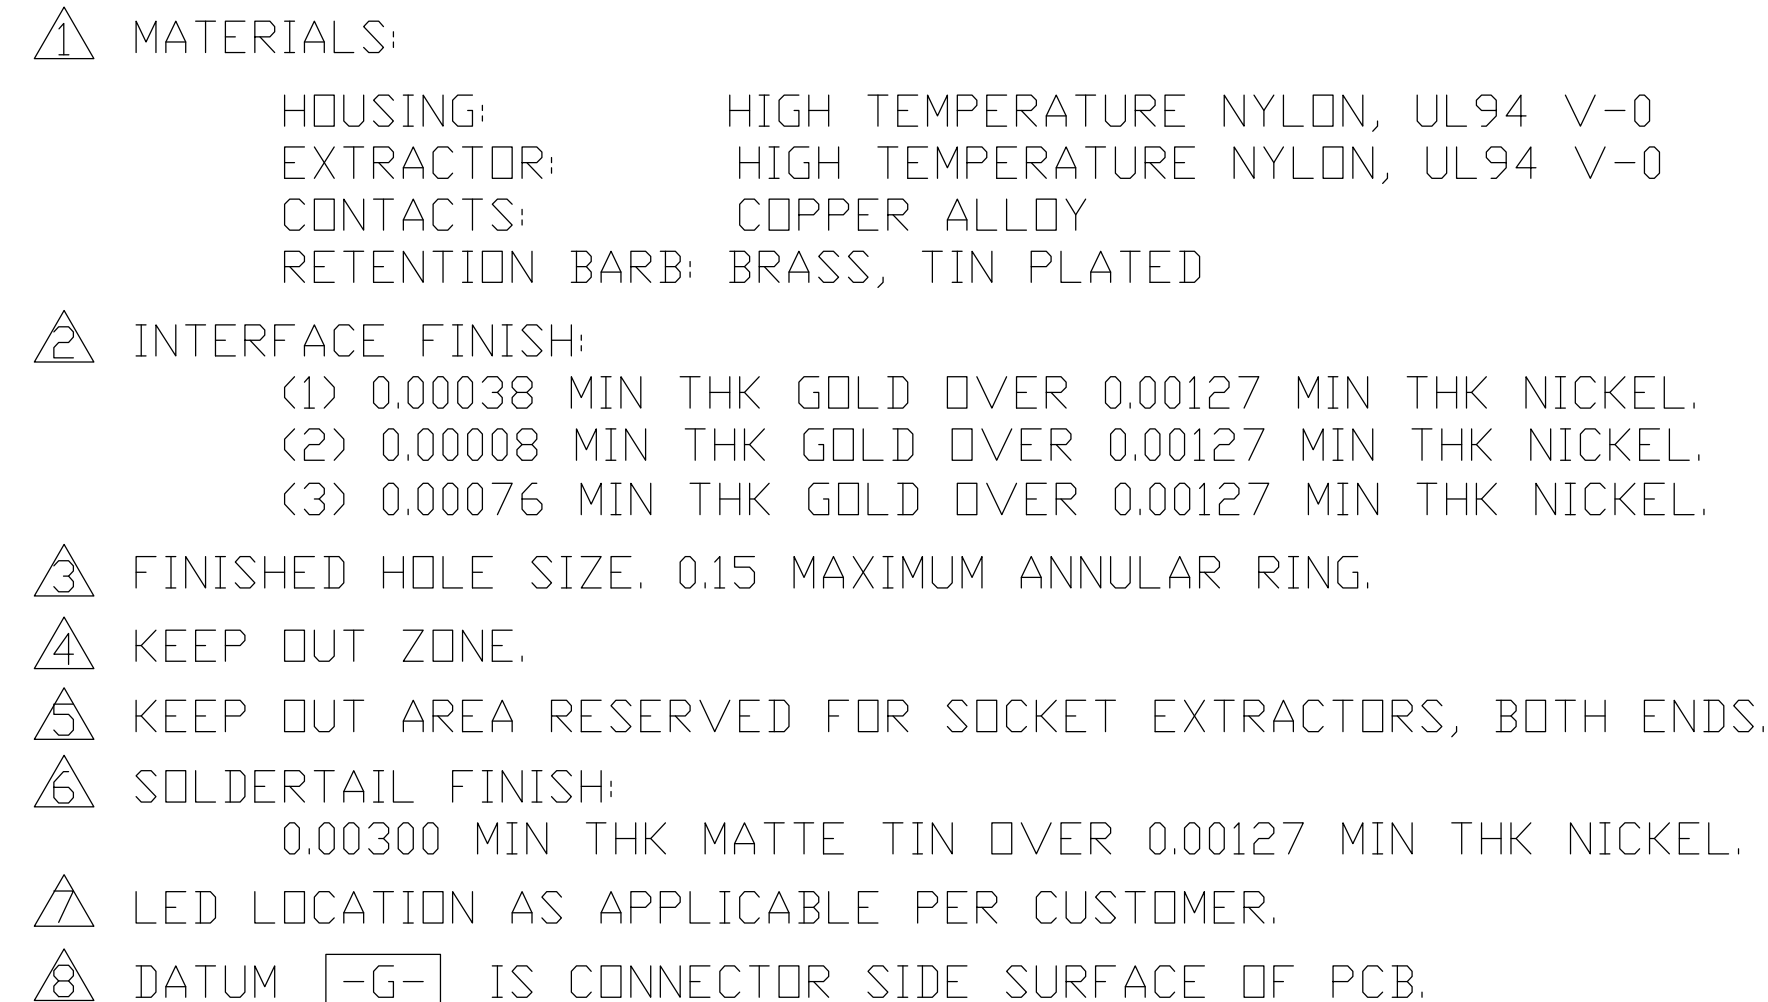

| LOC | DIST | REVISIONS |     |             |      |     |
|-----|------|-----------|-----|-------------|------|-----|
| ES  | 00   | REV       | LTR | DESCRIPTION | DATE | OWN |
|     |      |           |     | SEE SHEET 1 |      |     |

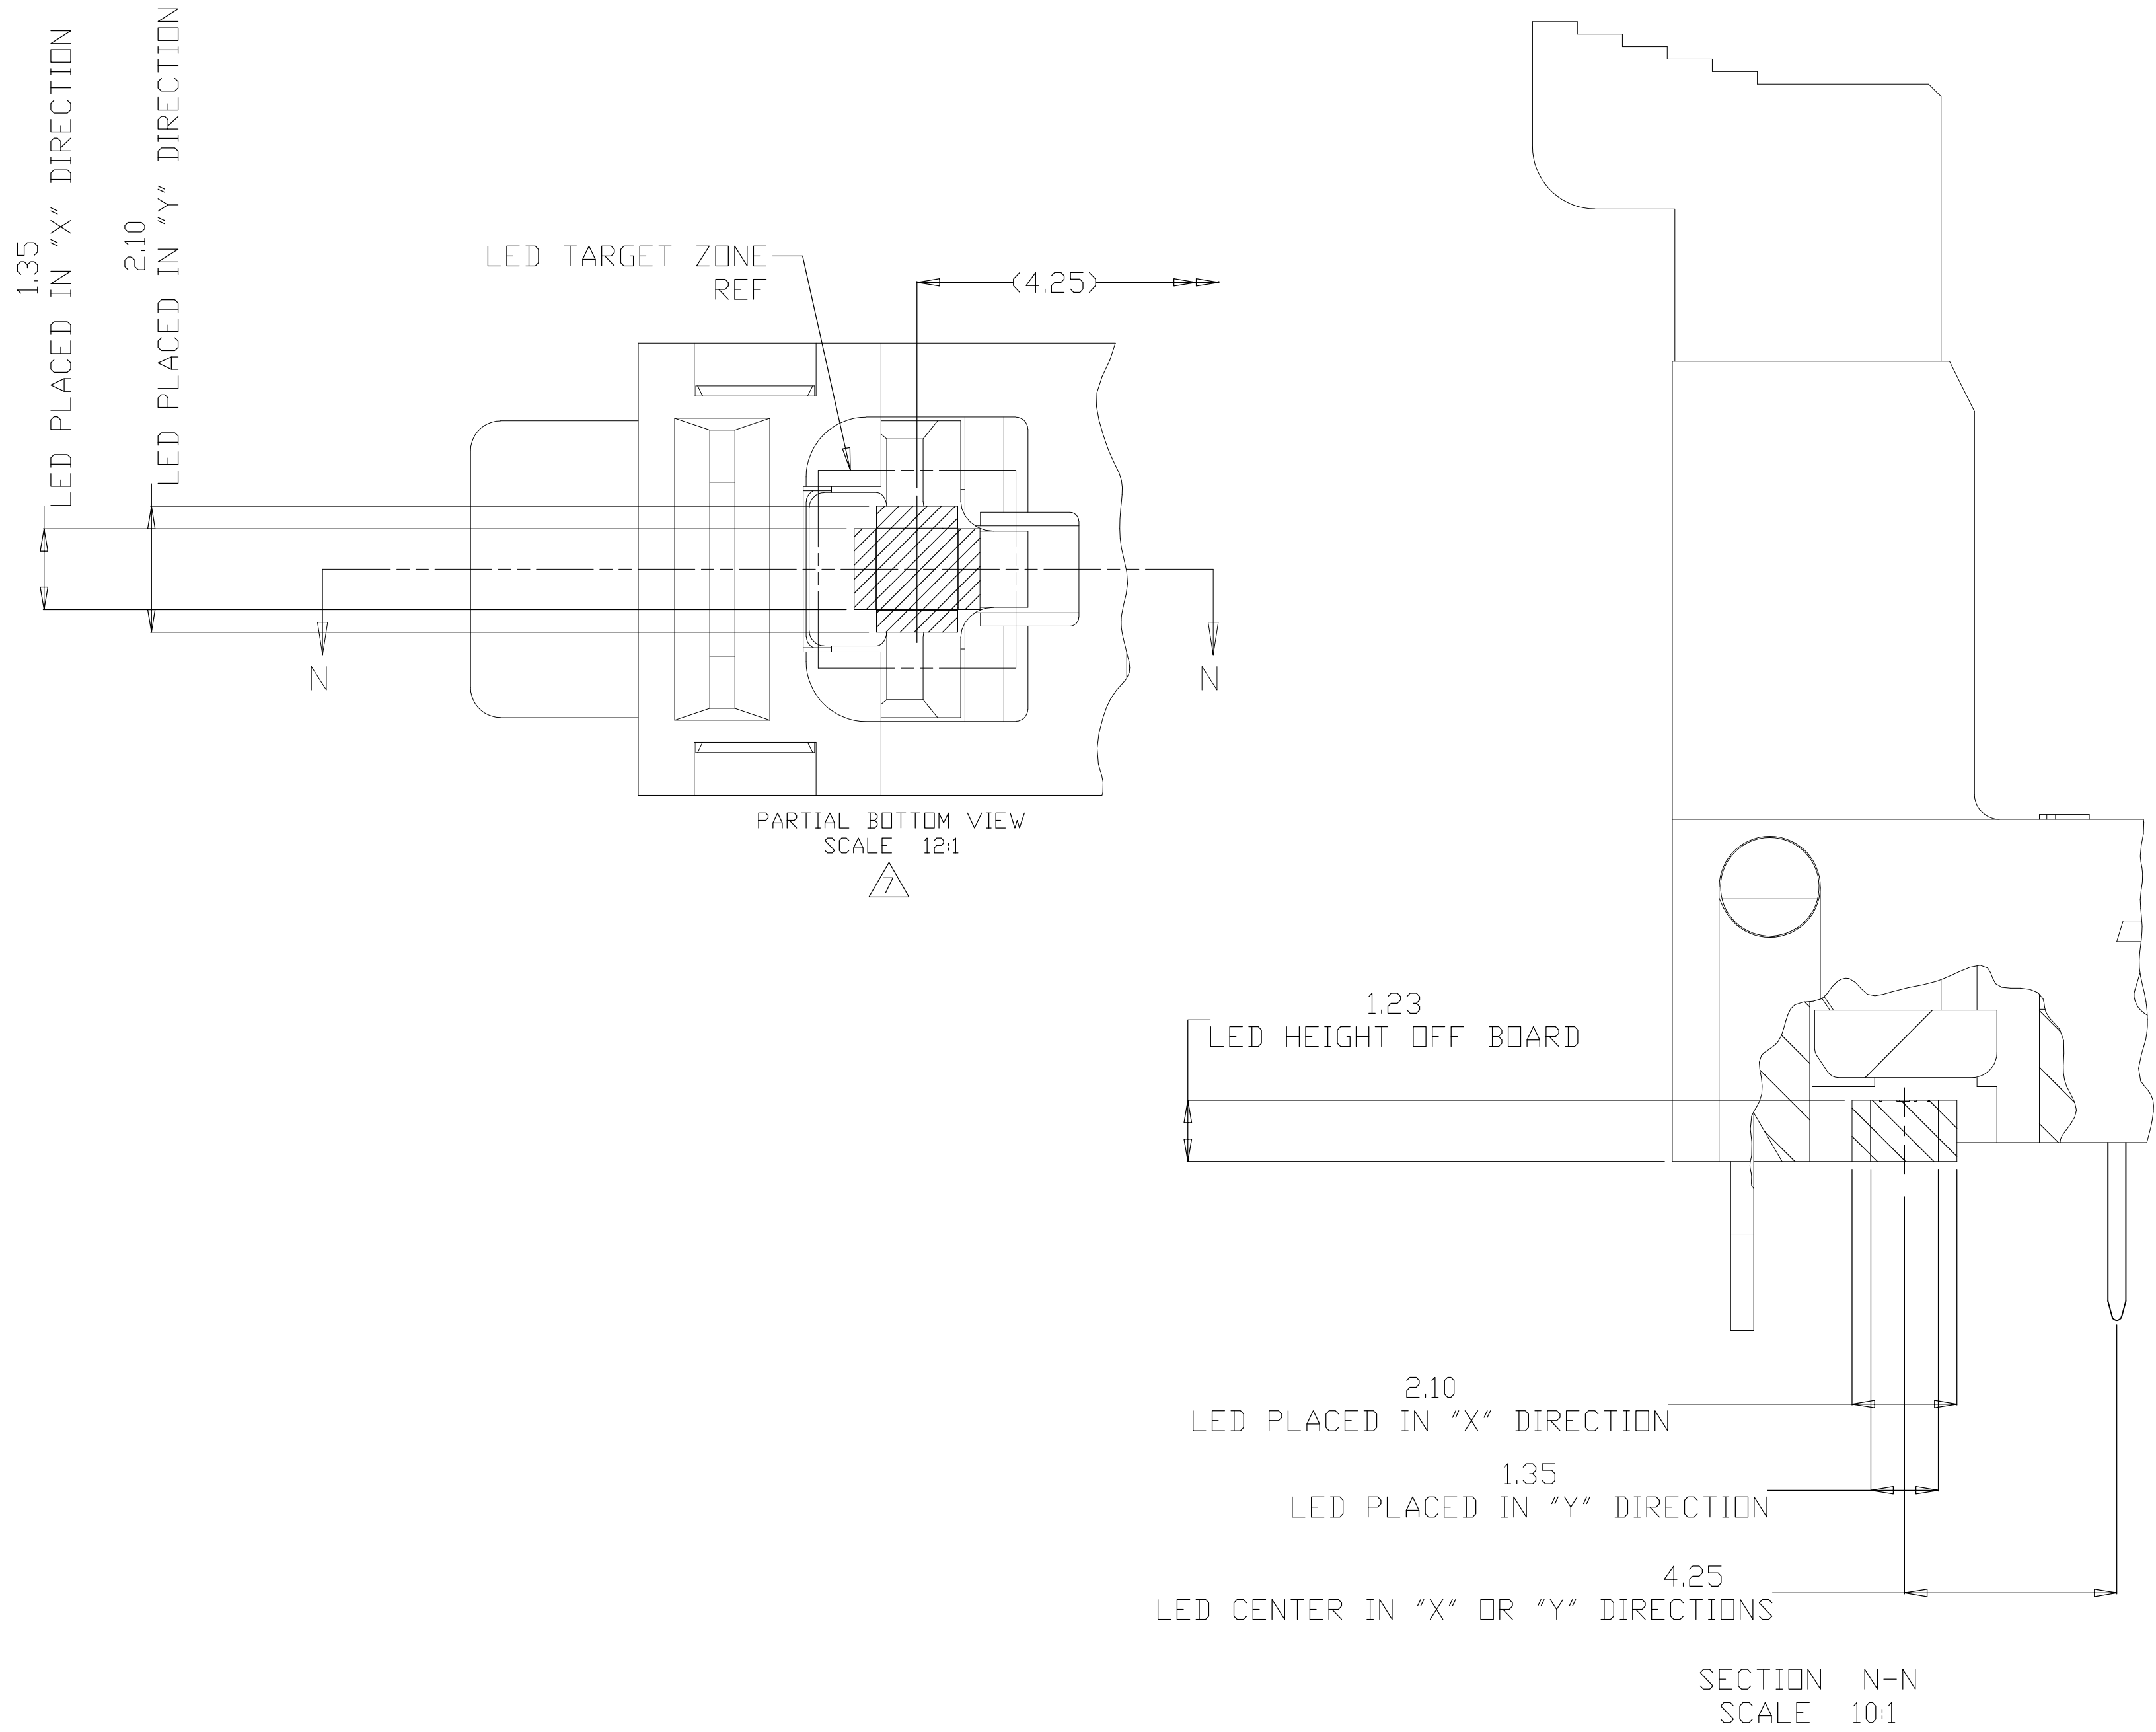

|                   |                    |                                           |                              |                |                   |
|-------------------|--------------------|-------------------------------------------|------------------------------|----------------|-------------------|
| RETENTION<br>BARB | BLACK              | BLACK                                     | 0.00076 MIN<br>(30u'')       | 2.54           | 7-1932000-6       |
|                   | NATURAL            |                                           |                              | 2.54           | 7-1932000-5       |
|                   | NATURAL            | BLUE<2935U>                               | 0.00038 MIN<15u'')           | 2.67           | 7-1932000-2       |
|                   | NATURAL            | PINK<701C>                                | 0.00008 MIN<br>(3u'', FLASH) | 2.54           | 6-1932000-5       |
|                   |                    | BLUE<284C>                                |                              | 2.54           | 6-1932000-4       |
|                   | BLACK              | BLACK                                     | 0.00076 MIN<br>(30u'')       | 4.00           | 5-1932000-2       |
|                   | NATURAL            | BLACK                                     |                              | 3.18           | 5-1932000-1       |
|                   |                    |                                           |                              | 4.00           | 4-1932000-8       |
|                   |                    |                                           |                              | 3.18           | 4-1932000-7       |
|                   | NATURAL            | GREEN<368C><br>BLUE<284C><br>ORANGE<021C> | 0.00038 MIN<br>(15u'')       | 2.67           | 4-1932000-6       |
|                   |                    |                                           |                              | 2.67           | 3-1932000-3       |
|                   |                    |                                           |                              | 2.67           | 2-1932000-5       |
|                   | BLACK              | BLACK                                     | 0.00038 MIN<br>(15u'')       | 2.67           | 2-1932000-1       |
|                   |                    |                                           |                              | 3.18           | 1-1932000-7       |
|                   |                    |                                           | NATURAL                      | BLACK          | 0.00008 MIN<3u'') |
|                   | 4.00               | 1-1932000-5                               |                              |                |                   |
|                   | NATURAL            | BLACK                                     | 0.00038 MIN<br>(15u'')       | 3.18           | 1-1932000-1       |
|                   |                    |                                           | 0.00008 MIN<3u'')            | 2.67           | 1-1932000-0       |
|                   |                    |                                           |                              | 2.67           | 1932000-7         |
|                   | NATURAL            | NATURAL                                   | 0.00038 MIN<br>(15u'')       | 4.00           | 1932000-6         |
|                   |                    |                                           |                              | 3.18           | 1932000-5         |
|                   |                    |                                           |                              | 2.67           | 1932000-4         |
|                   |                    |                                           | 0.00008 MIN<br>(3u'', FLASH) | 4.00           | 1932000-3         |
| 3.18              |                    |                                           |                              | 1932000-2      |                   |
| 2.67              |                    |                                           |                              | 1932000-1      |                   |
| HOUSING<br>STYLE  | EXTRACTOR<br>COLOR | HOUSING<br>COLOR                          | CONTACT GOLD<br>INTERFACE    | TAIL<br>LENGTH | PART<br>NUMBER    |


|                                                                                           |  |                                 |                                                                      |              |        |
|-------------------------------------------------------------------------------------------|--|---------------------------------|----------------------------------------------------------------------|--------------|--------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                    |  | DWN<br>LEO ZHOU<br>28FEB2007    | TE Connectivity                                                      |              |        |
| DIMENSIONS:<br>mm                                                                         |  | CHK<br>STEVEN YAO<br>28FEB2007  |                                                                      |              |        |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:                                                    |  | APVD<br>STEVEN YAO<br>28FEB2007 | NAME                                                                 |              |        |
| 0 PLC ± -<br>1 PLC ± 0.5<br>2 PLC ± 0.13<br>3 PLC ± 0.013<br>4 PLC ± 0.0001<br>ANGLES ± - |  | PRODUCT SPEC                    | SOCKET ASSEMBLY,<br>VERTICAL DDR3 DIMM,<br>SOLDER TAIL, 240 POSITION |              |        |
| MATERIAL                                                                                  |  | APPLICATION SPEC                |                                                                      |              |        |
| FINISH                                                                                    |  | WEIGHT                          | SIZE CAGE CODE DRAWING NO                                            |              |        |
| -                                                                                         |  | -                               | A1 00779 1932000                                                     |              |        |
| CUSTOMER DRAWING                                                                          |  | SCALE 4:1                       |                                                                      | SHEET 2 OF 4 | REV H7 |



RECOMMENDED PCB LAYOUT  
VIEWED FROM CONNECTOR SIDE

RECOMMENDED MODULE LAYOUT  
SCALE 3:1  
REFER TO JEDEC MO-269 FOR COMPLETE MODULE DETAILS

DETAIL E  
SCALE 8:1

|                                                                                       |  |                                          |  |                                                                                                       |  |
|---------------------------------------------------------------------------------------|--|------------------------------------------|--|-------------------------------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |  | DWG: LEO ZHOU 28FEB2007                  |  |  TE Connectivity |  |
|                                                                                       |  | CHR: STEVEN 28FEB2007                    |  |                                                                                                       |  |
| DIMENSIONS:                                                                           |  | TOLERANCES (UNLESS OTHERWISE SPECIFIED): |  | NAME                                                                                                  |  |
| mm                                                                                    |  | APPRO: STEVEN YAO 28FEB2007              |  | SOCKET ASSEMBLY,<br>VERTICAL DDR3 DIMM,<br>SOLDER TAIL, 240 POSITION                                  |  |
|  |  | PRODUCT SPEC                             |  | SIZE                                                                                                  |  |
|                                                                                       |  | APPLICATION SPEC                         |  | CAGE CODE                                                                                             |  |
|                                                                                       |  | —                                        |  | DRAWING NO                                                                                            |  |
|                                                                                       |  | —                                        |  | RESTRICTED TO                                                                                         |  |
| MATERIAL                                                                              |  | WEIGHT                                   |  | A1 00779 C 1932000                                                                                    |  |
| —                                                                                     |  | —                                        |  | —                                                                                                     |  |
|                                                                                       |  | CUSTOMER DRAWING                         |  | SCALE 4:1 SHEET 3 OF 4 REV H7                                                                         |  |





# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1932000-5](#)