



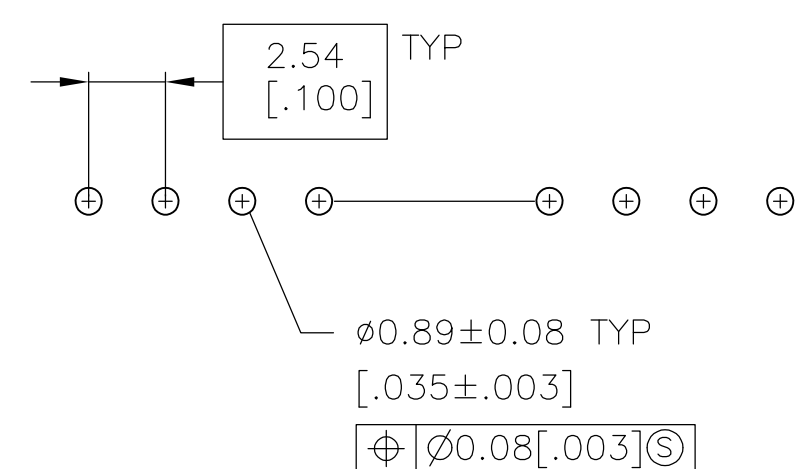


RECOMMENDED HOLE LAYOUT

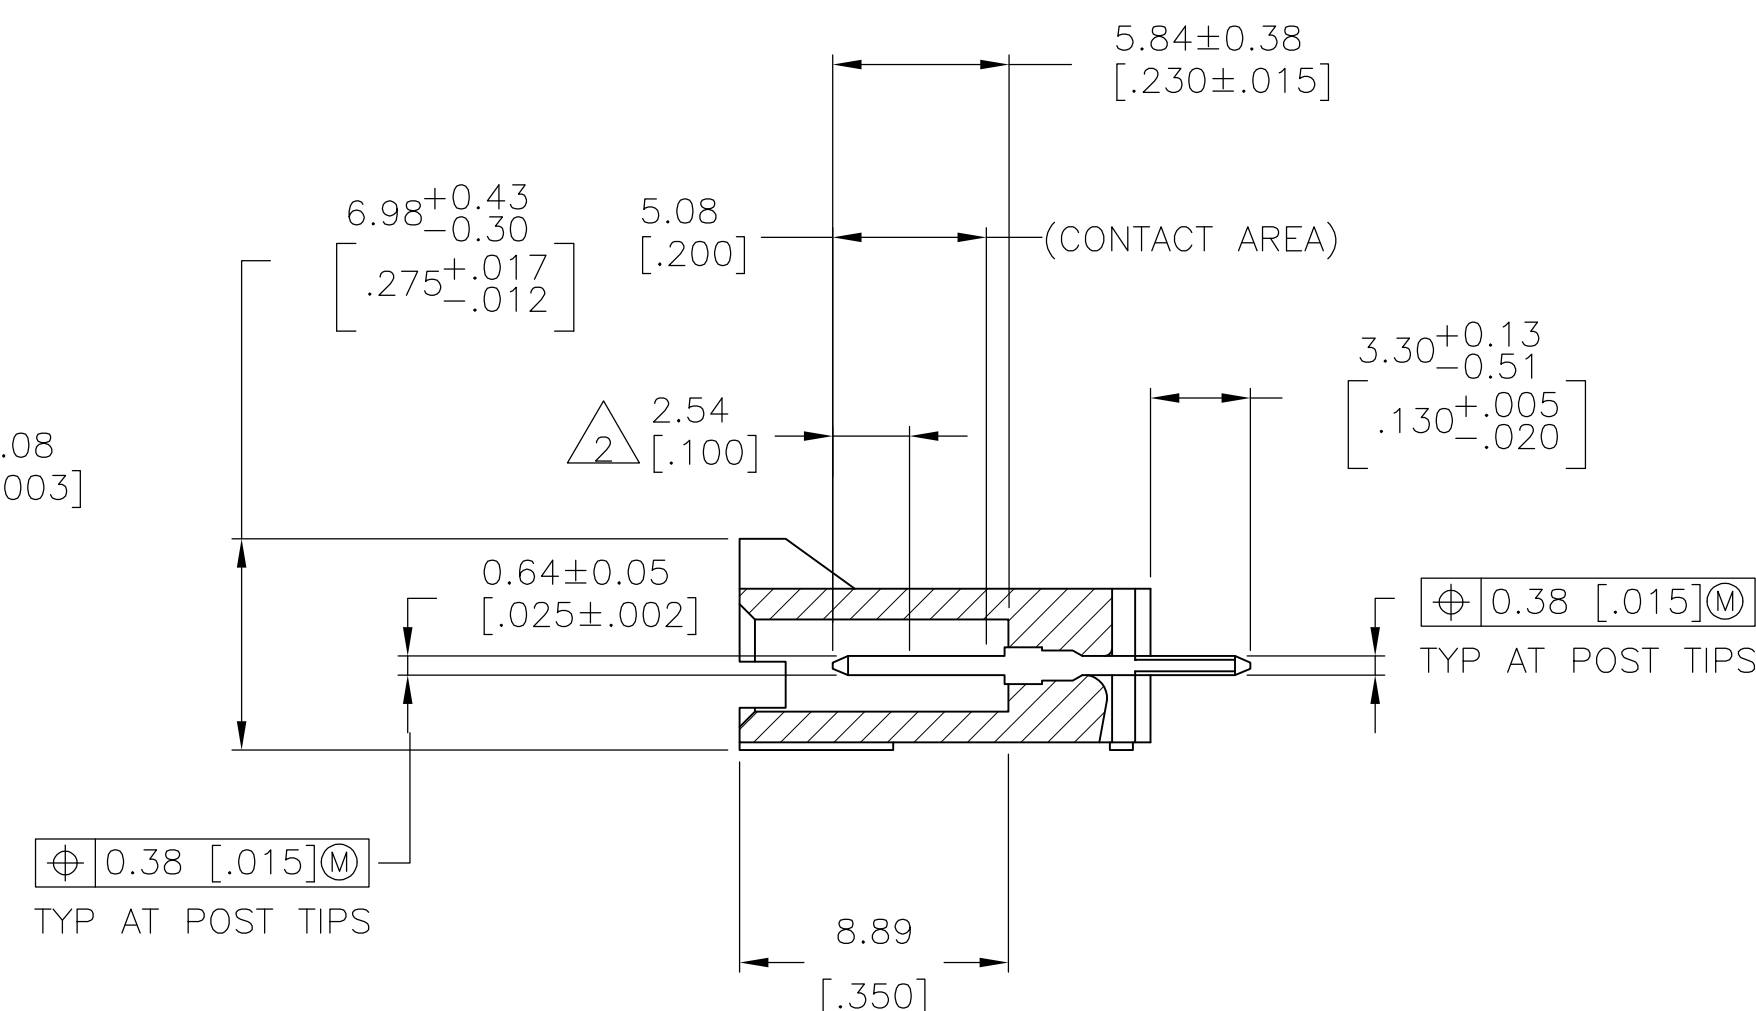

SECTION A-A

- 1 .00076[.000030] GOLD IN THE CONTACT AREA,
.00254[.000100] MATTE TIN-LEAD ON REMAINDER OF CONTACT,
ALL OVER .00127[.000050] NICKEL.
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION
OF THE POST AND THE HOUSING.
- 4 ON ASSEMBLIES WITH FOUR OR MORE POSITIONS,
TWO POLARIZATION SLOTS.
ON ASSEMBLIES WITH TWO OR THREE POSITIONS,
ONE POLARIZATION SLOT.
- 5 .00076[.000030] GOLD IN THE CONTACT AREA,
.00254[.000100] MATTE TIN ON REMAINDER OF CONTACT,
ALL OVER .00127[.000050] NICKEL.
- 6 HIGH TEMPERATURE CONFIGURATION
- 7 STANDOFFS NOT PRESENT ON UNDERSIDE OF ASSEMBLY
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

		6	1	64.01 [2.520]	65.91 [2.595]	24	25	2-103735-4
8	OBSOLETE	6	1	61.47 [2.420]	63.37 [2.495]	23	24	2-103735-3
8	OBSOLETE	6	1	58.93 [2.320]	60.83 [2.395]	22	23	2-103735-2
8	OBSOLETE	6	1	56.39 [2.220]	58.29 [2.295]	21	22	2-103735-1
8	OBSOLETE	6	1	53.85 [2.120]	55.75 [2.195]	20	21	2-103735-0
		6	1	51.31 [2.020]	53.21 [2.095]	19	20	1-103735-9
8	OBSOLETE	6	1	48.77 [1.920]	50.67 [1.995]	18	19	1-103735-8
		6	1	46.23 [1.820]	48.13 [1.895]	17	18	1-103735-7
		6	1	43.69 [1.720]	45.59 [1.795]	16	17	1-103735-6
		6	1	41.15 [1.620]	43.05 [1.695]	15	16	1-103735-5
		6	1	38.61 [1.520]	40.51 [1.595]	14	15	1-103735-4
		6	1	36.07 [1.420]	37.97 [1.495]	13	14	1-103735-3
		6	1	33.53 [1.320]	35.43 [1.395]	12	13	1-103735-2
		6	1	30.99 [1.220]	32.89 [1.295]	11	12	1-103735-1
		6	1	28.45 [1.120]	30.35 [1.195]	10	11	1-103735-0
		6	1	25.91 [1.020]	27.81 [1.095]	9	10	103735-9
		6	1	23.37 [.920]	25.27 [0.995]	8	9	103735-8
		6	1	20.83 [.820]	22.73 [.895]	7	8	103735-7
		6	1	18.29 [.720]	20.19 [.795]	6	7	103735-6
		6	1	15.75 [.620]	17.65 [.695]	5	6	103735-5
		6	1	13.21 [.520]	15.11 [.595]	4	5	103735-4
		6	1	10.67 [.420]	12.57 [.495]	3	4	103735-3
		6	1	8.13 [.320]	10.03 [.395]	2	3	103735-2
		6	1	5.59 [.220]	7.49 [.295]	1	2	103735-1
	REMARKS		PLATING	C	B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 3-5-91 S. SHUEY		 TE Connectivity	
		QW 3-27-91 L. CASTAGNA			
dimensions: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME HDR ASSY, VERT, SINGLE ROW 2.54[.100] @ .064[.025] SQ POST, WITH PLZN & CATCH, AMPMODOM MTE	
		0 PLG ± — 1 PLG ± — 2 PLG ± 0.13[.005] 3 PLG ± — 4 PLG ± — ANGLES ± —			
MATERIAL		WEIGHT		SIZE CASE CODE DRAWING NO. RECTORIZED TO	
HOUSING: FLAME RETARDANT COVER: BLACK CONTACTS: BRASS		SEE TABLE		A1 00779 C 103735 —	
CUSTOMER DRAWING				SCALE 4:1 SHEET 1 OF 2 REV V	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-103735-7](#)