
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	TLY-13	NEMA 5-15P	1	black overmold
2	TLY-28	IEC320 C5	1	black overmold
3	30-00244	Wire, 3C, 18 AWG, UL SVT, 300V, 105C, 6.3 mm, VW-1, PVC	1	
4	Label	Adhesive flag, 15x100 mm	1	white with black font

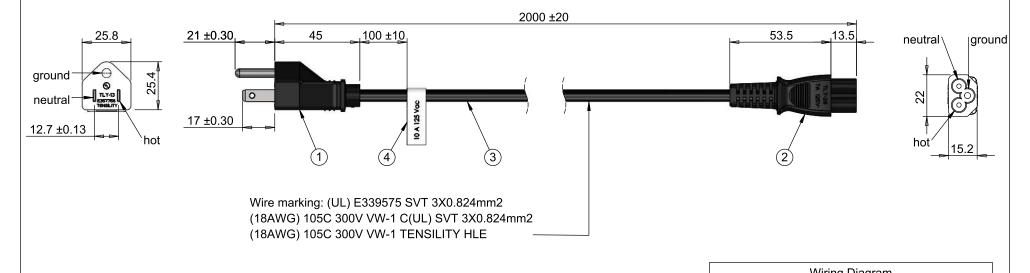

Notes:

Electrical requirements: 7 A at 125 Vac

	vviring Diagram					
TLY-13	wire color	TLY-28				
hot	black	hot				
neutral	white	neutral				
ground	green	ground				

Verified: PS Date: 2017.01.36 Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm Verified: PS Date: 2017.01.36 Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm Verified: PS Date: 2017.01.36 Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm Verified: PS Date: 2017.01.36 Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm Verified: PS Date: 2017.01.36 Description: Ac cord, 2000 mm, U.S, NEMA 5-15P plug, TLY-13 to C5, TLY-28, 18 AWG, SVT wire, 30-00244 September 1.541.323.3228 ### 1.541.323.3228 ### 1.541.323.4202 ### 1.541.323.3228 ### 1	Revision:	Date:	Description:	Prepared:	Notes:	
PS	Α	12/20/2013	Initial release	DN Digitally signed by DN Date: 2017.01.26 14:05:48 - 08'00'		TFNSII ITY
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm Description: Ac cord, 2000 mm, U.S, NEMA 5-15P plug, TLY- 13 to C5, TLY-28, 18 AWG, SVT wire, 30-00244 Second 1-1-00056				PS Digitally signed by PS Date: 2017.01.26		
Tolerances:						, , , , , , , , , , , , , , , , , , , ,
X.X: ± 0.3 mm 13 to C5, TLY-28, 18 AWG, SVT wire, 30-00244 Scales, 4:2 Sheet 1 of 1				Tolerances:	blerances: + 0.5 mm Ac cord, 2000 mm, U.S, NEMA 5-15P plug, TLY-	
A.AA. <u>1</u> 0.00 mm					13 to C5, TLY-28, 18 AWG, SVT wire, 30-00244	Scale: 1:2 Sheet 1 of 1

3

2