


CUSTOMER DRAWING

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

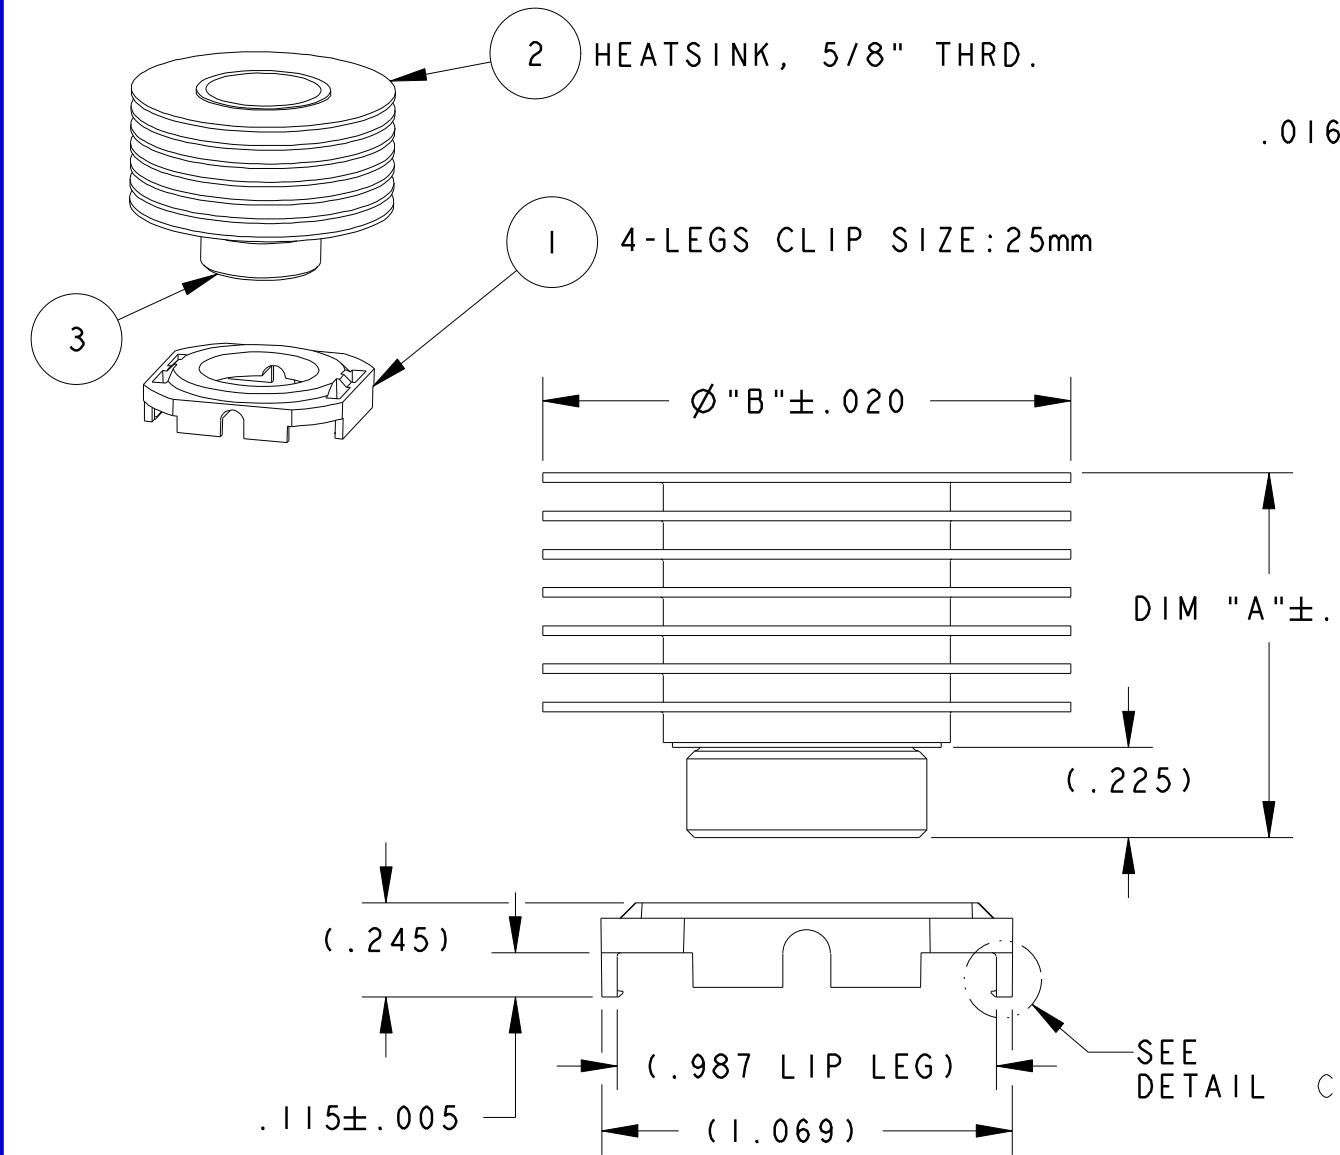

3	INTERFACE	1
2	HEATSINK, 5/8" THRD.	1
1	MOUNTING CLIP	1

ITEM NO.	DESCRIPTION	QTY
TABLE 1 (BOM)		

REVISION INFO	REV.
RELEASE ERN #: 112104 E.TAO 4-24-07 APP'D: V.K 4-30-07	A
RELEASED ECR-07-010928 ETAO 5-9-07 APP'D: V.K 5-9-07	B
RELEASED ECR-07-012339 ETAO 5-24-07 APP'D: V.K 5-24-07	B1
RELEASED ECO-07-023087 DA 10-1-07 APP'D: BP 10-18-07	C
RELEASED ECR-07-030181 ETAO 12-13-07 APP'D: B.P 12-17-07	C1

200 LFM	400 LFM	600 LFM				
3.70	2.48	2.09	2-1963553-7	$\varnothing 2.000$ " HS, 5/8" THRD. 7 FINS	2.000	.940
4.28	2.77	2.26	2-1963553-5	$\varnothing 2.000$ " HS, 5/8" THRD. 5 FINS	2.000	.740
4.72	3.01	2.40	2-1963553-4	$\varnothing 2.000$ " HS, 5/8" THRD. 4 FINS	2.000	.640
5.19	3.32	2.64	2-1963553-3	$\varnothing 2.000$ " HS, 5/8" THRD. 3 FINS	2.000	.540
5.72	3.66	2.91	2-1963553-2	$\varnothing 2.000$ " HS, 5/8" THRD. 2 FINS	2.000	.440
4.89	3.37	2.71	1-1963553-7	$\varnothing 1.375$ " HS, 5/8" THRD, 7 FINS	1.375	.940
5.61	3.72	2.95	1-1963553-5	$\varnothing 1.375$ " HS, 5/8" THRD, 5 FINS	1.375	.740
6.16	4.01	3.13	1-1963553-4	$\varnothing 1.375$ " HS, 5/8" THRD, 4 FINS	1.375	.640
6.91	4.48	3.51	1-1963553-3	$\varnothing 1.375$ " HS, 5/8" THRD, 3 FINS	1.375	.540
7.67	4.96	3.89	1-1963553-2	$\varnothing 1.375$ " HS, 5/8" THRD. 2 FINS	1.375	.440
Rca ($^{\circ}$ C/WATT)			ASSEMBLY HS PART NO.	DESCRIPTION	$\varnothing$ "B"	DIM "A"
THERMAL PERFORMANCE			TABLE 2			

DO NOT SCALE	Tyco Electronics			North Attleboro, Massachusetts 02760		CONFIDENTIAL PROPERTY OF TYCO ELECTRONICS. NOT TO BE DISCLOSED TO OTHERS. REPRODUCED OR USED FOR ANY PURPOSES EXCEPT AS AUTHORIZED IN WRITING BY AN AUTHORIZED OFFICIAL OF TYCO ELECTRONICS. MUST BE RETURNED TO TYCO ELECTRONICS ON DEMAND, ON COMPLETION OF ORDER OR OTHER PURPOSES FOR WHICH LENT.		TITLE: ASSEMBLY HEATSINK WITH 4 LEGS, 25mm CLIP	
	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN BY: E. TAO	DATE: 4-24-07	MATERIAL: N/A				
	.XX $\pm$. .XXX $\pm$. .XXXX $\pm$. ANGLES $\pm$ $^{\circ}$		ENGINEER: V. KHEIL	DATE: 4-30-07	FINISH: N/A	DIMENSIONS ARE IN: INCHES		TE PART NO.: SEE TABLE 2	SHEET 1 of 1
	FILENAME C-1963553		PROJECT	SYSTEM PRO-E	THIRD ANGLE PROJECTION		SCALE: 2:1 SIZE B	DWG. NO.: C-1963553	REV. C1

NOTES: UNLESS OTHERWISE SPECIFIED:

- INTERPRET DRAWING PER ASME Y14.5M-1994.
- MATERIAL: HEAT SINK: ALUMINUM
CLIP: BLACK PEI (UL94-VO)
- BEFORE THE HEATSINK APPLICATION, THE USER SHOULD IDENTIFY THE SPECIFICATION OF MAXIMUM LOAD ON THE BGA PACKAGE.

SCREW DRIVER SLOT (.070 WIDE X .100 DEEP) PROVIDED IN THE CENTER PORTION OF THE HEAT SINK. FOR ACCURATE TORQUE SETTING, SCREW DRIVER BIT MUST BE ALIGNED TO THE CENTER LINE OF THE HEAT SINK.

HEATSINK TORQUE SPECIFICATIONS CONVERTED TO FORCE.
BARE DIE PACKAGE:

1.5 POUND-FORCE INCH TORQUE = 8.5 POUND-FORCE
(0.17 NEWTON METER TORQUE = 37.81 NEWTON)

2.0 POUND-FORCE INCH TORQUE = 11.4 POUND-FORCE
(0.23 NEWTON METER TORQUE = 50.71 NEWTON)

FULL SIZE LID PACKAGE:

1.5 POUND-FORCE INCH TORQUE = 8.3 POUND-FORCE
(0.17 NEWTON METER TORQUE = 36.92 NEWTON)

2.0 POUND-FORCE INCH TORQUE = 11.1 POUND-FORCE
(0.23 NEWTON METER TORQUE = 49.38 NEWTON)

- REMOVE CLIP WITH REMOVAL TOOL P/N: 1542616-1.
- RoHS COMPLIANT AND CERTIFIED.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1963553-3](#)